

mitsubishi

mitsubishi carbide

End mills for copper electrode milling

B003E

CRN

Extended range of CRN coated end mills for copper electrode milling

NEW

**Series
expansion**

CRN2XLRB

NEW


CRN2MRB



Copper Electrode End Mill Series

CRN

Series expansion.
 Corner Radius types now included!
 A wide variety of products,
 308 different sizes in 7 series.

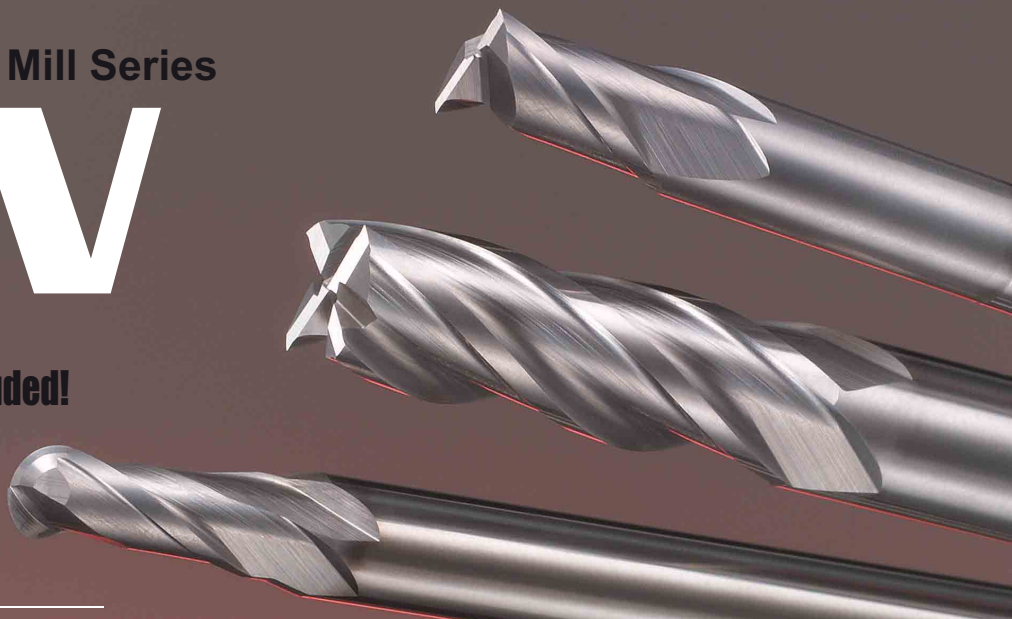

Features

High adhesion and hardness

CRN coating has been developed with higher hardness and enhanced adhesion properties to the substrate than was previously achievable.


The result of this latest coating technology shows greater wear resistance at high temperatures and greatly helps to retain the sharp cutting edge geometry necessary for copper cutting applications.

	CRN	(Al,Ti)N	Carbide
Micro hardness (HV)	2000	2800	1500
Adhesion	80	80	-

Adhesion : Critical load of scratch test.

Superior lubricity


The table opposite shows the superior lubrication and adhesion properties of CRN coating when used at high speeds. This results in longer tool life and enables an excellent surface finish to be achieved when compared to conventional products.

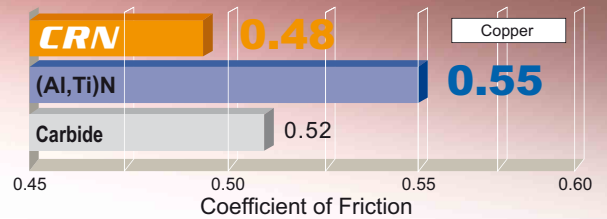


Friction coefficient at high temperature (600°C)

Machining example 1



Excellent Surface Finish

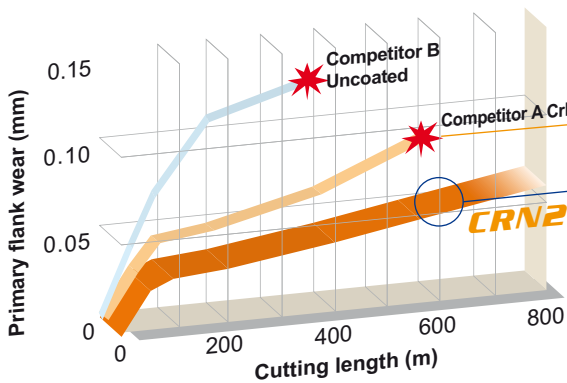

Competitor A





CRN2MB



End mill	CRN2MB R3
Work material	Copper
Revolution	13000min ⁻¹ (77m/min)
Feed rate	3900mm/min (0.15mm/tooth)
Cutting method	Climb cut, Air blow

Machining example 2

Long tool life

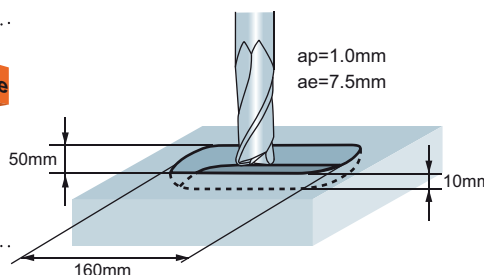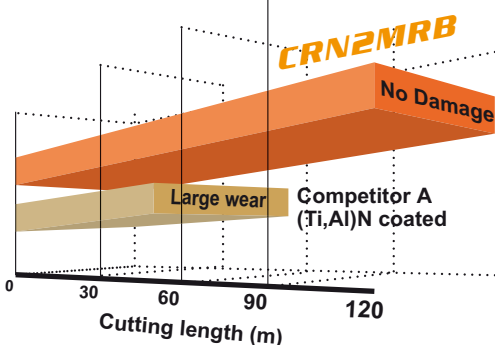

End mill	CRN2MRB $\phi 10 \times R0.5$
Work material	Copper
Revolution	4500min ⁻¹ (141m/min)
Feed rate	900mm/min (0.1mm/tooth)
Cutting method	Contour, Emulsion

CRN2MS

For Copper Electrodes,
Medium, 2 flute

$\phi 0.2 - \phi 12$

35 different sizes available.



CRN4JC

For Copper Electrodes,
Semi Long, 4 flute

$\phi 3 - \phi 12$

7 different sizes available.



CRN2XL

For Copper Electrodes,
Long Neck, 2 flute

$\phi 0.2 - \phi 6$

68 different sizes available.



CRN2MB

For Copper Electrodes,
Ball Nose, Medium, 2 flute

R0.2 - R6

22 different sizes available.



CRN2XLB

For Copper Electrodes,
Ball Nose, Long Neck, 2 flute

R0.1 - R3

118 different sizes available.



CRN2MRB

For Copper Electrodes,
Corner radius, Medium, 2 flute



$\phi 6 \times R0.2 - \phi 12 \times R1$

13 different sizes available.



CRN2XLRB

For Copper Electrodes,
Corner radius, Short, 2 flute, Long neck




$\phi 0.5 \times R0.05 - \phi 6 \times R1$

45 different sizes available.




Machining Example 3

Comparison of high speed dry cutting performance

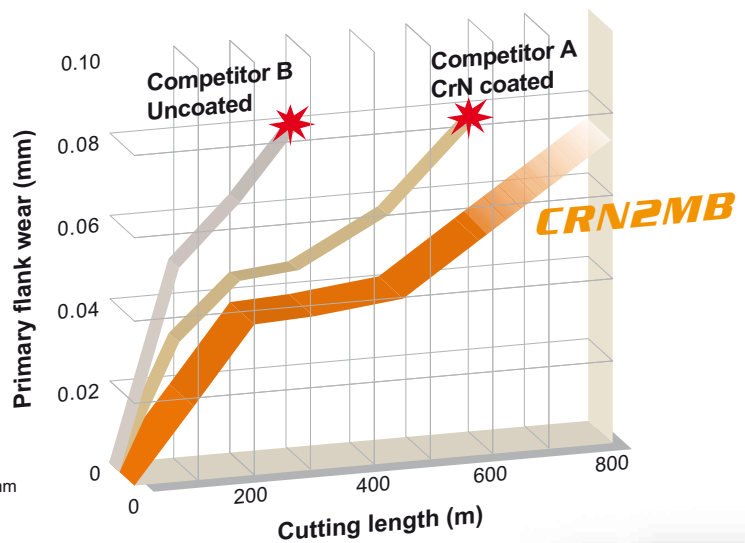

End mill	CRN2MB R3
Work material	Copper
Revolution	13000min ⁻¹ (231m/min)
Feed rate	2600mm/min (0.1mm/tooth)
Cutting method	Climb cut, Air blow





Machining Example 4


Comparison of wet cutting performance

CRN2XLB

Competitor A
CrN coated

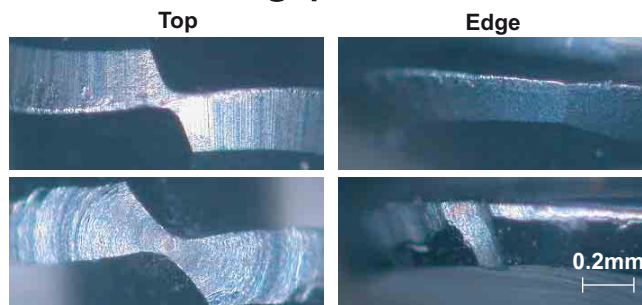

End mill	CRN2XLB R1
Work material	Copper
Revolution	16000min ⁻¹ (MAX101m/min)
Feed rate	1600mm/min (0.05mm/tooth)
Cutting method	Climb cut, Emulsion

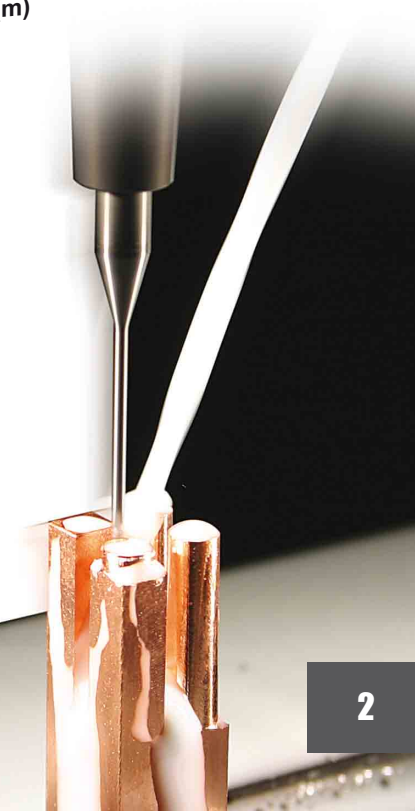

CRN COATED END MILLS

CRN2MS

End mill, Medium cut length, 2 flute, For copper electrodes



0 - -0.02




4 ≤ D4 ≤ 6 0 - -0.008


8 ≤ D4 ≤ 10 0 - -0.009

D4 = 12 0 - -0.011

Carbon Steel, Alloy Steel (<30HRC)	Pre-Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
						++	+

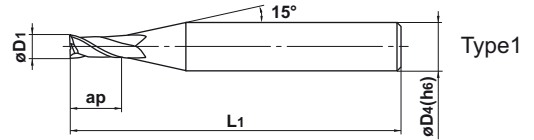

Type1



Type2



D1 < 3

D1 ≥ 3


● 2 flute end mill with CRN coating for copper electrode machining.

Unit : mm

Order Number	Dia.	Length of Cut	Overall Length	Shank Dia.	No. of Flutes N	Stock	Type
	D1	ap	L1	D4			
CRN2MSD0020S04	0.2	0.4	40	4	2	●	1
D0020S06	0.2	0.4	45	6	2	●	1
D0030S04	0.3	0.6	40	4	2	●	1
D0030S06	0.3	0.6	45	6	2	●	1
D0040S04	0.4	0.8	40	4	2	●	1
D0040S06	0.4	0.8	45	6	2	●	1
D0050S04	0.5	1	40	4	2	●	1
D0050S06	0.5	1	45	6	2	●	1
D0060S04	0.6	1.2	40	4	2	●	1
D0070S04	0.7	1.4	40	4	2	●	1
D0080S04	0.8	1.6	40	4	2	●	1
D0080S06	0.8	1.6	45	6	2	●	1
D0090S04	0.9	2	40	4	2	●	1
D0100S04	1	2.5	40	4	2	●	1
D0100S06	1	2.5	45	6	2	●	1
D0110S04	1.1	2.5	40	4	2	●	1
D0120S04	1.2	3	40	4	2	●	1
D0120S06	1.2	3	45	6	2	●	1
D0130S04	1.3	3	40	4	2	●	1
D0140S04	1.4	3	40	4	2	●	1
D0150S04	1.5	4	40	4	2	●	1
D0150S06	1.5	4	45	6	2	●	1
D0160S04	1.6	4	40	4	2	●	1
D0170S04	1.7	4	40	4	2	●	1
D0180S04	1.8	5	40	4	2	●	1
D0190S04	1.9	5	40	4	2	●	1
D0200S06	2	6	45	6	2	●	1
D0250S06	2.5	8	45	6	2	●	1
D0300S06	3	8	45	6	2	●	1
D0400S06	4	11	45	6	2	●	1
D0500S06	5	13	50	6	2	●	1
D0600S06	6	13	50	6	2	●	2
D0800S08	8	19	60	8	2	●	2
D1000S10	10	22	70	10	2	●	2
D1200S12	12	26	75	12	2	●	2



CRN2XL

End mill, 2 flute, Long neck, For copper electrodes



4 ≤ D4 ≤ 6 0 - -0.008

Carbon Steel, Alloy Steel (<30HRC)	Pre-Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
						++	+

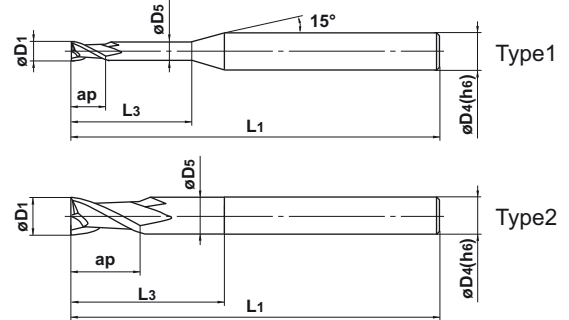

● 2 flute long neck end mill with CRN coating for copper electrode machining.

Unit : mm

Order Number	Dia. D1	Length of Cut ap	Neck Length L3	Neck Dia. D5	Overall Length L1	Shank Dia. D4	No. of Flutes N	Stock	Type
CRN2XLD0020N005S04	0.2	0.3	0.5	0.17	50	4	2	●	1
D0020N005S06	0.2	0.3	0.5	0.17	50	6	2	●	1
D0020N010S04	0.2	0.3	1	0.17	50	4	2	●	1
D0020N010S06	0.2	0.3	1	0.17	50	6	2	●	1
D0020N015S04	0.2	0.3	1.5	0.17	50	4	2	●	1
D0020N015S06	0.2	0.3	1.5	0.17	50	6	2	●	1
D0030N010S04	0.3	0.5	1	0.27	50	4	2	●	1
D0030N010S06	0.3	0.5	1	0.27	50	6	2	●	1
D0030N030S04	0.3	0.5	3	0.27	50	4	2	●	1
D0030N030S06	0.3	0.5	3	0.27	50	6	2	●	1
D0040N020S04	0.4	0.6	2	0.36	50	4	2	●	1
D0040N020S06	0.4	0.6	2	0.36	50	6	2	●	1
D0040N040S04	0.4	0.6	4	0.36	50	4	2	●	1
D0040N040S06	0.4	0.6	4	0.36	50	6	2	●	1
D0040N060S04	0.4	0.6	6	0.36	50	4	2	●	1
D0040N060S06	0.4	0.6	6	0.36	50	6	2	●	1
D0050N020S04	0.5	0.8	2	0.46	50	4	2	●	1
D0050N020S06	0.5	0.8	2	0.46	50	6	2	●	1
D0050N040S04	0.5	0.8	4	0.46	50	4	2	●	1
D0050N040S06	0.5	0.8	4	0.46	50	6	2	●	1
D0050N060S04	0.5	0.8	6	0.46	50	4	2	●	1
D0050N060S06	0.5	0.8	6	0.46	50	6	2	●	1
D0050N080S04	0.5	0.8	8	0.46	50	4	2	●	1
D0050N080S06	0.5	0.8	8	0.46	50	6	2	●	1
D0080N040S04	0.8	1.2	4	0.76	50	4	2	●	1
D0080N040S06	0.8	1.2	4	0.76	50	6	2	●	1
D0080N060S04	0.8	1.2	6	0.76	50	4	2	●	1
D0080N060S06	0.8	1.2	6	0.76	50	6	2	●	1
D0080N080S04	0.8	1.2	8	0.76	50	4	2	●	1
D0080N080S06	0.8	1.2	8	0.76	50	6	2	●	1
D0080N100S04	0.8	1.2	10	0.76	50	4	2	●	1
D0080N100S06	0.8	1.2	10	0.76	50	6	2	●	1
D0100N060S04	1	1.5	6	0.94	50	4	2	●	1
D0100N060S06	1	1.5	6	0.94	50	6	2	●	1
D0100N080S04	1	1.5	8	0.94	50	4	2	●	1
D0100N080S06	1	1.5	8	0.94	50	6	2	●	1
D0100N100S04	1	1.5	10	0.94	50	4	2	●	1
D0100N100S06	1	1.5	10	0.94	50	6	2	●	1

● : Inventory maintained.

CRN COATED END MILLS

CRN2XL

End mill, 2 flute, Long neck, For copper electrodes



0 - -0.02



h6


4 ≤ D4 ≤ 6 0 - -0.008

Unit : mm

Order Number	Dia. D1	Length of Cut ap	Neck Length L3	Neck Dia. D5	Overall Length L1	Shank Dia. D4	No. of Flutes N	Stock	Type
CRN2XLD0100N120S04	1	1.5	12	0.94	50	4	2	●	1
D0100N120S06	1	1.5	12	0.94	50	6	2	●	1
D0100N160S04	1	1.5	16	0.94	55	4	2	●	1
D0100N160S06	1	1.5	16	0.94	55	6	2	●	1
D0150N060S04	1.5	2.3	6	1.44	50	4	2	●	1
D0150N060S06	1.5	2.3	6	1.44	50	6	2	●	1
D0150N080S04	1.5	2.3	8	1.44	50	4	2	●	1
D0150N080S06	1.5	2.3	8	1.44	50	6	2	●	1
D0150N100S04	1.5	2.3	10	1.44	50	4	2	●	1
D0150N100S06	1.5	2.3	10	1.44	50	6	2	●	1
D0150N120S04	1.5	2.3	12	1.44	50	4	2	●	1
D0150N120S06	1.5	2.3	12	1.44	50	6	2	●	1
D0150N160S04	1.5	2.3	16	1.44	55	4	2	●	1
D0150N160S06	1.5	2.3	16	1.44	55	6	2	●	1
D0150N200S04	1.5	2.3	20	1.44	60	4	2	●	1
D0150N200S06	1.5	2.3	20	1.44	60	6	2	●	1
D0200N060S06	2	3.0	6	1.90	50	6	2	●	1
D0200N080S06	2	3.0	8	1.90	50	6	2	●	1
D0200N100S06	2	3.0	10	1.90	50	6	2	●	1
D0200N120S06	2	3.0	12	1.90	50	6	2	●	1
D0200N160S06	2	3.0	16	1.90	55	6	2	●	1
D0200N200S06	2	3.0	20	1.90	60	6	2	●	1
D0250N080S06	2.5	3.8	8	2.40	50	6	2	●	1
D0250N120S06	2.5	3.8	12	2.40	55	6	2	●	1
D0250N160S06	2.5	3.8	16	2.40	60	6	2	●	1
D0250N200S06	2.5	3.8	20	2.40	65	6	2	●	1
D0300N200S06	3	4.5	20	2.90	65	6	2	●	1
D0400N200S06	4	6.0	20	3.90	65	6	2	●	1
D0500N250S06	5	7.5	25	4.90	70	6	2	●	1
D0600N300S06	6	9.0	30	5.85	70	6	2	●	2

CRN4JC

End mill, Semi long cut length, 4 flute, For copper electrodes




D4 = 6	0 - -0.008
8 ≤ D4 ≤ 10	0 - -0.009
D4 = 12	0 - -0.011

Carbon Steel, Alloy Steel (<30HRC)	Pre-Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
						++	+



● 4 flute end mill with CRN coating for copper electrode machining.

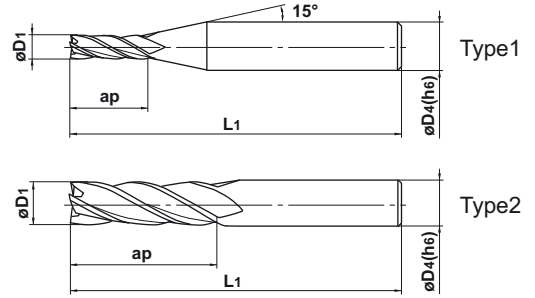

Unit : mm

Order Number	Dia. D1	Length of Cut ap	Overall Length L1	Shank Dia. D4	No. of Flutes N	Stock	Type
CRN4JCD0300	3	12	50	6	4	●	1
D0400	4	15	50	6	4	●	1
D0500	5	20	60	6	4	●	1
D0600	6	20	60	6	4	●	2
D0800	8	25	70	8	4	●	2
D1000	10	30	90	10	4	●	2
D1200	12	30	90	12	4	●	2

CRN COATED END MILLS


CRN2MB

Ball nose, Medium cut length, 2 flute, For copper electrodes



D4 = 3	0 - -0.006
4 ≤ D4 ≤ 6	0 - -0.008
8 ≤ D4 ≤ 10	0 - -0.009
D4 = 12	0 - -0.011

Carbon Steel, Alloy Steel (<30HRC)	Pre-Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
						++	+

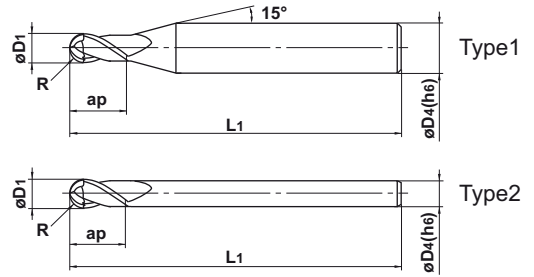

● 2 flute ball nose end mill with CRN coating for copper electrode machining.

Unit : mm

Order Number	Radius of Ball Nose R	Dia. D1	Length of Cut ap	Overall Length L1	Shank Dia. D4	No. of Flutes N	Stock	Type
CRN2MBR0020S04	0.2	0.4	0.8	45	4	2	●	1
R0020S06	0.2	0.4	0.8	50	6	2	●	1
R0030S04	0.3	0.6	1.2	45	4	2	●	1
R0030S06	0.3	0.6	1.2	50	6	2	●	1
R0040S04	0.4	0.8	1.6	45	4	2	●	1
R0040S06	0.4	0.8	1.6	50	6	2	●	1
R0050S04	0.5	1	2.5	45	4	2	●	1
R0050S06	0.5	1	2.5	50	6	2	●	1
R0075S04	0.75	1.5	4	45	4	2	●	1
R0075S06	0.75	1.5	4	50	6	2	●	1
R0100S06	1	2	6	50	6	2	●	1
R0125S06	1.25	2.5	6	50	6	2	●	1
R0150S03	1.5	3	8	70	3	2	●	2
R0150S06	1.5	3	8	70	6	2	●	1
R0175S06	1.75	3.5	8	70	6	2	●	1
R0200S04	2	4	8	70	4	2	●	2
R0200S06	2	4	8	70	6	2	●	1
R0250S06	2.5	5	12	80	6	2	●	1
R0300S06	3	6	12	80	6	2	●	2
R0400S08	4	8	14	90	8	2	●	2
R0500S10	5	10	18	100	10	2	●	2
R0600S12	6	12	22	110	12	2	●	2

CRN2XLB

Ball nose, Long neck, 2 flute, For copper electrodes





4 ≤ D4 ≤ 6 0 - -0.008

Carbon Steel, Alloy Steel (<30HRC)	Pre-Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
						++	+



Effective length for inclined angle

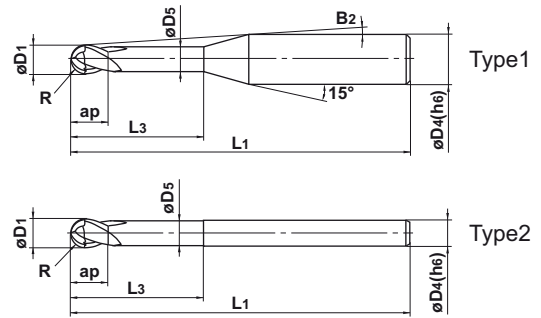

● 2 flute long neck ball nose end mill with CRN coating for copper electrode machining.

Unit : mm

Order Number	Radius of Ball Nose R	Dia. D1	Length of Cut ap	Neck Length L3	Neck Dia. D5	Cutting Edge to Shank Angle B2	Overall Length L1	Shank Dia. D4	No. of Flutes N	Stock	Type	Effective length for inclined angle			
												30°	1°	2°	3°
CRN2XLB R0010N005S04	0.1	0.2	0.2	0.5	0.17	14.1°	50	4	2	●	1	0.5	0.5	0.6	0.6
R0010N005S06	0.1	0.2	0.2	0.5	0.17	14.4°	50	6	2	●	1	0.5	0.5	0.6	0.6
R0010N010S04	0.1	0.2	0.2	1	0.17	13.3°	50	4	2	●	1	1	1.1	1.2	1.3
R0010N010S06	0.1	0.2	0.2	1	0.17	13.8°	50	6	2	●	1	1	1.1	1.2	1.3
R0010N015S04	0.1	0.2	0.2	1.5	0.17	12.5°	50	4	2	●	1	1.5	1.6	1.7	1.9
R0010N015S06	0.1	0.2	0.2	1.5	0.17	13.3°	50	6	2	●	1	1.5	1.6	1.7	1.9
R0015N010S04	0.15	0.3	0.3	1	0.27	13.3°	50	4	2	●	1	1	1.1	1.2	1.3
R0015N010S06	0.15	0.3	0.3	1	0.27	13.9°	50	6	2	●	1	1	1.1	1.2	1.3
R0015N015S04	0.15	0.3	0.3	1.5	0.27	12.5°	50	4	2	●	1	1.5	1.6	1.7	1.9
R0015N015S06	0.15	0.3	0.3	1.5	0.27	13.3°	50	6	2	●	1	1.5	1.6	1.7	1.9
R0015N020S04	0.15	0.3	0.3	2	0.27	11.9°	50	4	2	●	1	2.1	2.2	2.3	2.5
R0015N020S06	0.15	0.3	0.3	2	0.27	12.8°	50	6	2	●	1	2.1	2.2	2.3	2.5
R0020N010S04	0.2	0.4	0.4	1	0.36	13.4°	50	4	2	●	1	1	1	1.1	1.2
R0020N010S06	0.2	0.4	0.4	1	0.36	13.9°	50	6	2	●	1	1	1	1.1	1.2
R0020N015S04	0.2	0.4	0.4	1.5	0.36	12.6°	50	4	2	●	1	1.5	1.6	1.7	1.8
R0020N015S06	0.2	0.4	0.4	1.5	0.36	13.4°	50	6	2	●	1	1.5	1.6	1.7	1.8
R0020N020S04	0.2	0.4	0.4	2	0.36	11.9°	50	4	2	●	1	2	2.1	2.3	2.5
R0020N020S06	0.2	0.4	0.4	2	0.36	12.8°	50	6	2	●	1	2	2.1	2.3	2.5
R0020N030S04	0.2	0.4	0.4	3	0.36	10.7°	50	4	2	●	1	3.1	3.2	3.4	3.7
R0020N030S06	0.2	0.4	0.4	3	0.36	11.9°	50	6	2	●	1	3.1	3.2	3.4	3.7
R0025N015S04	0.25	0.5	0.5	1.5	0.46	12.6°	50	4	2	●	1	1.5	1.6	1.7	1.8
R0025N015S06	0.25	0.5	0.5	1.5	0.46	13.4°	50	6	2	●	1	1.5	1.6	1.7	1.8
R0025N020S04	0.25	0.5	0.5	2	0.46	11.9°	50	4	2	●	1	2	2.1	2.3	2.4
R0025N020S06	0.25	0.5	0.5	2	0.46	12.9°	50	6	2	●	1	2	2.1	2.3	2.4
R0025N030S04	0.25	0.5	0.5	3	0.46	10.6°	50	4	2	●	1	3.1	3.2	3.4	3.7
R0025N030S06	0.25	0.5	0.5	3	0.46	11.9°	50	6	2	●	1	3.1	3.2	3.4	3.7
R0025N040S04	0.25	0.5	0.5	4	0.46	9.6°	50	4	2	●	1	4.1	4.3	4.6	4.9
R0025N040S06	0.25	0.5	0.5	4	0.46	11.1°	50	6	2	●	1	4.1	4.3	4.6	4.9
R0025N060S04	0.25	0.5	0.5	6	0.46	8.1°	50	4	2	●	1	6.2	6.4	6.9	7.4
R0025N060S06	0.25	0.5	0.5	6	0.46	9.7°	50	6	2	●	1	6.2	6.4	6.9	7.4
R0025N080S04	0.25	0.5	0.5	8	0.46	7°	50	4	2	●	1	8.3	8.5	9.2	9.9
R0025N080S06	0.25	0.5	0.5	8	0.46	8.7°	50	6	2	●	1	8.3	8.5	9.2	9.9
R0025N100S04	0.25	0.5	0.5	10	0.46	6.2°	50	4	2	●	1	10.3	10.7	11.5	12.4
R0025N100S06	0.25	0.5	0.5	10	0.46	7.8°	50	6	2	●	1	10.3	10.7	11.5	12.4
R0030N020S04	0.3	0.6	0.6	2	0.56	11.8°	50	4	2	●	1	2.1	2.2	2.3	2.5
R0030N020S06	0.3	0.6	0.6	2	0.56	12.8°	50	6	2	●	1	2.1	2.2	2.3	2.5
R0030N040S04	0.3	0.6	0.6	4	0.56	9.5°	50	4	2	●	1	4.2	4.3	4.6	5
R0030N040S06	0.3	0.6	0.6	4	0.56	11°	50	6	2	●	1	4.2	4.3	4.6	5

● : Inventory maintained.

CRN COATED END MILLS

CRN2XLB

Ball nose, Long neck, 2 flute, For copper electrodes



0 - -0.008

Unit : mm

Order Number	Radius of Ball Nose R	Dia. D1	Length of Cut ap	Neck Length L3	Neck Dia. D5	Cutting Edge to Shank Angle B2	Overall Length L1	Shank Dia. D4	No. of Flutes N	Stock	Type	Effective length for inclined angle			
												30°	1°	2°	3°
CRN2XLB R0030N060S04	0.3	0.6	0.6	6	0.56	8°	50	4	2	●	1	6.3	6.5	6.9	7.5
R0030N060S06	0.3	0.6	0.6	6	0.56	9.7°	50	6	2	●	1	6.3	6.5	6.9	7.5
R0030N080S04	0.3	0.6	0.6	8	0.56	6.9°	50	4	2	●	1	8.3	8.6	9.2	10
R0030N080S06	0.3	0.6	0.6	8	0.56	8.6°	50	6	2	●	1	8.3	8.6	9.2	10
R0030N100S04	0.3	0.6	0.6	10	0.56	6°	50	4	2	●	1	10.4	10.8	11.5	12.5
R0030N100S06	0.3	0.6	0.6	10	0.56	7.8°	50	6	2	●	1	10.4	10.8	11.5	12.5
R0040N020S04	0.4	0.8	0.8	2	0.76	11.7°	50	4	2	●	1	2.1	2.2	2.3	2.5
R0040N020S06	0.4	0.8	0.8	2	0.76	12.8°	50	6	2	●	1	2.1	2.2	2.3	2.5
R0040N040S04	0.4	0.8	0.8	4	0.76	9.4°	50	4	2	●	1	4.2	4.3	4.6	5
R0040N040S06	0.4	0.8	0.8	4	0.76	11°	50	6	2	●	1	4.2	4.3	4.6	5
R0040N060S04	0.4	0.8	0.8	6	0.76	7.8°	50	4	2	●	1	6.3	6.5	6.9	7.5
R0040N060S06	0.4	0.8	0.8	6	0.76	9.6°	50	6	2	●	1	6.3	6.5	6.9	7.5
R0040N080S04	0.4	0.8	0.8	8	0.76	6.7°	50	4	2	●	1	8.3	8.6	9.2	10
R0040N080S06	0.4	0.8	0.8	8	0.76	8.5°	50	6	2	●	1	8.3	8.6	9.2	10
R0040N100S04	0.4	0.8	0.8	10	0.76	5.9°	50	4	2	●	1	10.4	10.8	11.5	12.4
R0040N100S06	0.4	0.8	0.8	10	0.76	7.7°	50	6	2	●	1	10.4	10.8	11.5	12.4
R0050N030S04	0.5	1	1	3	0.94	10.1°	50	4	2	●	1	3.2	3.3	3.6	3.9
R0050N030S06	0.5	1	1	3	0.94	11.6°	50	6	2	●	1	3.2	3.3	3.6	3.9
R0050N040S04	0.5	1	1	4	0.94	9.1°	50	4	2	●	1	4.2	4.4	4.8	5.2
R0050N040S06	0.5	1	1	4	0.94	10.8°	50	6	2	●	1	4.2	4.4	4.8	5.2
R0050N050S04	0.5	1	1	5	0.94	8.2°	50	4	2	●	1	5.3	5.5	6	6.4
R0050N050S06	0.5	1	1	5	0.94	10.1°	50	6	2	●	1	5.3	5.5	6	6.4
R0050N060S04	0.5	1	1	6	0.94	7.5°	50	4	2	●	1	6.3	6.6	7.1	7.7
R0050N060S06	0.5	1	1	6	0.94	9.4°	50	6	2	●	1	6.3	6.6	7.1	7.7
R0050N070S04	0.5	1	1	7	0.94	6.9°	50	4	2	●	1	7.4	7.7	8.3	8.9
R0050N070S06	0.5	1	1	7	0.94	8.8°	50	6	2	●	1	7.4	7.7	8.3	8.9
R0050N080S04	0.5	1	1	8	0.94	6.4°	50	4	2	●	1	8.4	8.8	9.4	10.2
R0050N080S06	0.5	1	1	8	0.94	8.3°	50	6	2	●	1	8.4	8.8	9.4	10.2
R0050N100S04	0.5	1	1	10	0.94	5.6°	50	4	2	●	1	10.5	10.9	11.7	12.6
R0050N100S06	0.5	1	1	10	0.94	7.5°	50	6	2	●	1	10.5	10.9	11.7	12.6
R0050N120S04	0.5	1	1	12	0.94	5°	50	4	2	●	1	12.6	13.1	14	15.1
R0050N120S06	0.5	1	1	12	0.94	6.8°	50	6	2	●	1	12.6	13.1	14	15.1
R0050N140S04	0.5	1	1	14	0.94	4.5°	50	4	2	●	1	14.7	15.2	16.3	17.6
R0050N140S06	0.5	1	1	14	0.94	6.2°	55	6	2	●	1	14.7	15.2	16.3	17.6
R0050N160S04	0.5	1	1	16	0.94	4.1°	55	4	2	●	1	16.8	17.4	18.6	20.1
R0050N160S06	0.5	1	1	16	0.94	5.7°	55	6	2	●	1	16.8	17.4	18.6	20.1
R0050N180S04	0.5	1	1	18	0.94	3.7°	55	4	2	●	1	18.9	19.5	20.9	22.6
R0050N180S06	0.5	1	1	18	0.94	5.3°	60	6	2	●	1	18.9	19.5	20.9	22.6
R0050N200S04	0.5	1	1	20	0.94	3.4°	55	4	2	●	1	20.9	21.6	23.2	25.1
R0050N200S06	0.5	1	1	20	0.94	5°	60	6	2	●	1	20.9	21.6	23.2	25.1
R0075N080S04	0.75	1.5	1.5	8	1.44	5.9°	50	4	2	●	1	8.4	8.8	9.4	10.1
R0075N080S06	0.75	1.5	1.5	8	1.44	8.1°	50	6	2	●	1	8.4	8.8	9.4	10.1
R0075N100S04	0.75	1.5	1.5	10	1.44	5.1°	50	4	2	●	1	10.5	10.9	11.7	12.6
R0075N100S06	0.75	1.5	1.5	10	1.44	7.2°	50	6	2	●	1	10.5	10.9	11.7	12.6
R0075N120S04	0.75	1.5	1.5	12	1.44	4.4°	50	4	2	●	1	12.6	13.1	14	15.1
R0075N120S06	0.75	1.5	1.5	12	1.44	6.5°	50	6	2	●	1	12.6	13.1	14	15.1
R0075N140S04	0.75	1.5	1.5	14	1.44	4°	50	4	2	●	1	14.7	15.2	16.3	17.6
R0075N140S06	0.75	1.5	1.5	14	1.44	5.9°	55	6	2	●	1	14.7	15.2	16.3	17.6
R0075N160S04	0.75	1.5	1.5	16	1.44	3.6°	55	4	2	●	1	16.8	17.3	18.6	20
R0075N160S06	0.75	1.5	1.5	16	1.44	5.4°	55	6	2	●	1	16.8	17.3	18.6	20

CRN2XLB

Ball nose, Long neck, 2 flute, For copper electrodes





4 ≤ D4 ≤ 6 0 - -0.008

Carbon Steel, Alloy Steel (<30HRC)	Pre-Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
						++	+



Effective length for inclined angle

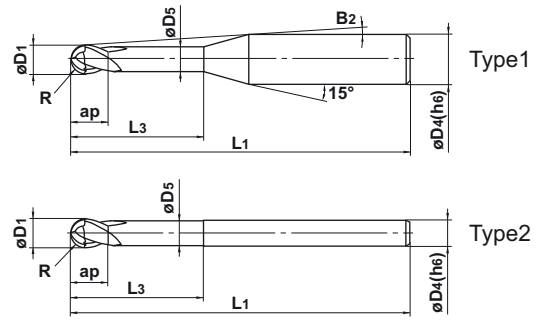

● 2 flute long neck ball nose end mill with CRN coating for copper electrode machining.

Unit : mm

Order Number	Radius of Ball Nose R	Dia. D1	Length of Cut ap	Neck Length L3	Neck Dia. D5	Cutting Edge to Shank Angle B2	Overall Length L1	Shank Dia. D4	No. of Flutes N	Stock	Type	Effective length for inclined angle			
												30°	1°	2°	3°
CRN2XLB R0075N180S04	0.75	1.5	1.5	18	1.44	3.3°	55	4	2	●	1	18.8	19.5	20.9	22.5
R0075N180S06	0.75	1.5	1.5	18	1.44	5°	60	6	2	●	1	18.8	19.5	20.9	22.5
R0075N200S04	0.75	1.5	1.5	20	1.44	3°	55	4	2	●	1	20.9	21.6	23.2	*
R0075N200S06	0.75	1.5	1.5	20	1.44	4.6°	60	6	2	●	1	20.9	21.6	23.2	25
R0100N080S04	1	2	2	8	1.90	5.3°	50	4	2	●	1	8.3	8.7	9.2	9.9
R0100N080S06	1	2	2	8	1.90	7.8°	50	6	2	●	1	8.3	8.7	9.2	9.9
R0100N100S04	1	2	2	10	1.90	4.5°	50	4	2	●	1	10.4	10.8	11.5	12.4
R0100N100S06	1	2	2	10	1.90	6.9°	50	6	2	●	1	10.4	10.8	11.5	12.4
R0100N120S04	1	2	2	12	1.90	3.9°	50	4	2	●	1	12.5	12.9	13.8	14.9
R0100N120S06	1	2	2	12	1.90	6.1°	50	6	2	●	1	12.5	12.9	13.8	14.9
R0100N140S04	1	2	2	14	1.90	3.4°	50	4	2	●	1	14.6	15.1	16.1	17.4
R0100N140S06	1	2	2	14	1.90	5.6°	55	6	2	●	1	14.6	15.1	16.1	17.4
R0100N160S04	1	2	2	16	1.90	3.1°	55	4	2	●	1	16.7	17.2	18.4	19.9
R0100N160S06	1	2	2	16	1.90	5.1°	55	6	2	●	1	16.7	17.2	18.4	19.9
R0100N200S04	1	2	2	20	1.90	2.5°	60	4	2	●	1	20.8	21.5	23	*
R0100N200S06	1	2	2	20	1.90	4.3°	60	6	2	●	1	20.8	21.5	23	24.8
R0100N250S06	1	2	2	25	1.90	3.7°	65	6	2	●	1	26	26.8	28.8	31
R0100N300S06	1	2	2	30	1.90	3.2°	70	6	2	●	1	31.1	32.2	34.5	37.3
R0150N160S06	1.5	3	3	16	2.90	4.3°	60	6	2	●	1	16.6	17.2	18.4	19.7
R0150N250S06	1.5	3	3	25	2.90	3°	70	6	2	●	1	26	26.8	28.7	*
R0150N350S06	1.5	3	3	35	2.90	2.2°	80	6	2	●	1	36.3	37.5	40.2	*
R0200N160S06	2	4	4	16	3.90	3.2°	70	6	2	●	1	16.6	17.1	18.3	19.6
R0200N200S06	2	4	4	20	3.90	2.7°	70	6	2	●	1	20.8	21.4	22.9	*
R0200N300S06	2	4	4	30	3.90	1.8°	70	6	2	●	1	31.1	32.1	*	*
R0200N400S06	2	4	4	40	3.90	1.4°	90	6	2	●	1	41.4	42.8	*	*
R0200N500S06	2	4	4	50	3.90	1.2°	100	6	2	●	1	51.8	53.5	*	*
R0250N200S06	2.5	5	5	20	4.90	1.5°	70	6	2	●	1	20.7	21.4	*	*
R0250N300S06	2.5	5	5	30	4.90	1°	80	6	2	●	1	31.1	*	*	*
R0300N300S06	3	6	6	30	5.85	—	80	6	2	●	1	*	*	*	*
R0300N500S06	3	6	6	50	5.85	—	100	6	2	●	1	*	*	*	*

* No interference

CRN COATED END MILLS

CRN2MRB

Corner radius, Medium cut length, 2 flute, For copper electrodes




0 - -0.02



D4 = 6 0 - -0.008
 8 ≤ D4 ≤ 10 0 - -0.009
 D4 = 12 0 - -0.011

Carbon Steel, Alloy Steel (<30HRC)	Pre-Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
						++	+

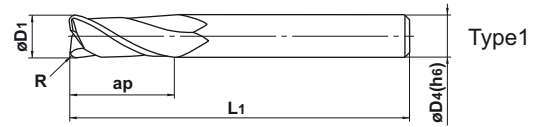


● 2 flute corner radius end mill with CRN coating for copper electrode machining.

Unit : mm

Order Number	Dia. D1	Length of Cut ap	Overall Length L1	Shank Dia. D4	Corner R R	No. of Flutes N	Stock	Type
CRN2MRBD0600R020	6	13	50	6	0.2	2	●	1
D0600R030	6	13	50	6	0.3	2	●	1
D0600R050	6	13	50	6	0.5	2	●	1
D0600R100	6	13	50	6	1	2	●	1
D0800R030	8	19	60	8	0.3	2	●	1
D0800R050	8	19	60	8	0.5	2	●	1
D0800R100	8	19	60	8	1	2	●	1
D1000R030	10	22	70	10	0.3	2	●	1
D1000R050	10	22	70	10	0.5	2	●	1
D1000R100	10	22	70	10	1	2	●	1
D1200R030	12	26	75	12	0.3	2	●	1
D1200R050	12	26	75	12	0.5	2	●	1
D1200R100	12	26	75	12	1	2	●	1


CRN2XLRB

Corner radius, Medium cut length, 2 flute, For copper electrodes




0 - -0.02 h6 4 ≤ D4 ≤ 6 0 - -0.008

Carbon Steel, Alloy Steel (<30HRC)	Pre-Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
						++	+

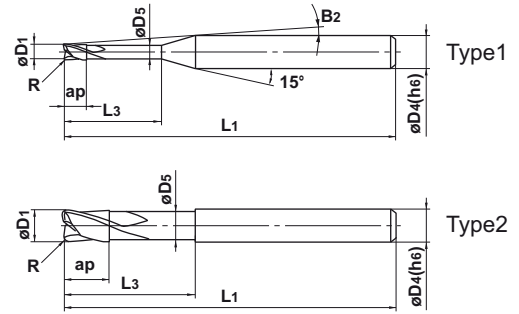

Effective length for inclined angle



● 2 flute long neck corner radius end mill with CRN coating for copper electrode machining.

Unit : mm

Order Number	Dia. D1	Length of Cut ap	Neck Length L3	Neck Dia. D5	Cutting Edge to Shank Angle B2	Overall Length L1	Shank Dia. D4	Corner R	No. of Flutes N	Stock	Type	Effective length for inclined angle			
												30°	1°	2°	3°
CRN2XLRBD0050R005N04	0.5	0.5	4	0.46	9.5°	50	4	0.05	2	●	1	4.1	4.3	4.6	5
D0050R010N04	0.5	0.5	4	0.46	9.5°	50	4	0.1	2	●	1	4.1	4.3	4.6	5
D0050R005N06	0.5	0.5	6	0.46	8°	50	4	0.05	2	●	1	6.2	6.4	6.9	7.5
D0050R010N06	0.5	0.5	6	0.46	8°	50	4	0.1	2	●	1	6.2	6.4	6.9	7.5
D0080R005N06	0.8	0.8	6	0.76	7.6°	50	4	0.05	2	●	1	6.3	6.5	7	7.6
D0080R010N06	0.8	0.8	6	0.76	7.6°	50	4	0.1	2	●	1	6.3	6.5	7	7.5
D0080R005N08	0.8	0.8	8	0.76	6.5°	50	4	0.05	2	●	1	8.3	8.6	9.3	10
D0080R010N08	0.8	0.8	8	0.76	6.6°	50	4	0.1	2	●	1	8.3	8.6	9.3	10
D0100R010N08	1	1	8	0.94	6.3°	50	4	0.1	2	●	1	8.5	8.8	9.5	10.2
D0100R030N08	1	1	8	0.94	6.3°	50	4	0.3	2	●	1	8.5	8.8	9.5	10.2
D0100R010N10	1	1	10	0.94	5.5°	55	4	0.1	2	●	1	10.6	11	11.8	12.7
D0100R030N10	1	1	10	0.94	5.5°	55	4	0.3	2	●	1	10.5	10.9	11.8	12.7
D0100R010N12	1	1	12	0.94	4.9°	55	4	0.1	2	●	1	12.6	13.1	14.1	15.2
D0100R030N12	1	1	12	0.94	4.9°	55	4	0.3	2	●	1	12.6	13.1	14.1	15.2
D0150R010N12	1.5	1.5	12	1.44	4.3°	55	4	0.1	2	●	1	12.6	13.1	14.1	15.2
D0150R020N12	1.5	1.5	12	1.44	4.3°	55	4	0.2	2	●	1	12.6	13.1	14.1	15.2
D0150R030N12	1.5	1.5	12	1.44	4.3°	55	4	0.3	2	●	1	12.6	13.1	14.1	15.2
D0150R010N20	1.5	1.5	20	1.44	2.9°	60	4	0.1	2	●	1	20.9	21.7	23.3	*
D0150R020N20	1.5	1.5	20	1.44	2.9°	60	4	0.2	2	●	1	20.9	21.7	23.3	*
D0150R030N20	1.5	1.5	20	1.44	3°	60	4	0.3	2	●	1	20.9	21.6	23.3	*
D0200R010N12	2	2	12	1.9	3.7°	55	4	0.1	2	●	1	12.5	13	14	15.1
D0200R020N12	2	2	12	1.9	3.7°	55	4	0.2	2	●	1	12.5	13	14	15.1
D0200R030N12	2	2	12	1.9	3.7°	55	4	0.3	2	●	1	12.5	13	13.9	15
D0200R050N12	2	2	12	1.9	3.8°	55	4	0.5	2	●	1	12.5	13	13.9	15
D0200R010N16	2	2	16	1.9	2.9°	55	4	0.1	2	●	1	16.7	17.3	18.6	*
D0200R020N16	2	2	16	1.9	2.9°	55	4	0.2	2	●	1	16.7	17.3	18.6	*
D0200R030N16	2	2	16	1.9	3°	55	4	0.3	2	●	1	16.7	17.3	18.5	*
D0200R050N16	2	2	16	1.9	3°	55	4	0.5	2	●	1	16.7	17.2	18.5	*
D0200R010N20	2	2	20	1.9	2.5°	60	4	0.1	2	●	1	20.8	21.6	23.2	*
D0200R020N20	2	2	20	1.9	2.5°	60	4	0.2	2	●	1	20.8	21.5	23.2	*
D0200R030N20	2	2	20	1.9	2.5°	60	4	0.3	2	●	1	20.8	21.5	23.1	*
D0200R050N20	2	2	20	1.9	2.5°	60	4	0.5	2	●	1	20.8	21.5	23.1	*
D0300R020N20	3	3	20	2.9	3.4°	65	6	0.2	2	●	1	20.8	21.5	23.2	25
D0300R030N20	3	3	20	2.9	3.4°	65	6	0.3	2	●	1	20.8	21.5	23.1	25
D0300R050N20	3	3	20	2.9	3.4°	65	6	0.5	2	●	1	20.8	21.5	23.1	24.9
D0400R020N20	4	4	20	3.9	2.5°	65	6	0.2	2	●	1	20.8	21.5	23.2	*
D0400R030N20	4	4	20	3.9	2.5°	65	6	0.3	2	●	1	20.8	21.5	23.1	*
D0400R050N20	4	4	20	3.9	2.5°	65	6	0.5	2	●	1	20.8	21.5	23.1	*

* No interference

● : Inventory maintained.

CRN COATED END MILLS

CRN2XLRB

Corner radius, Medium cut length, 2 flute, For copper electrodes



0 - -0.02



4 ≤ D4 ≤ 6 0 - -0.008

Unit : mm

Order Number	Dia. D1	Length of Cut ap	Neck Length L3	Neck Dia. D5	Cutting Edge to Shank Angle B2	Overall Length L1	Shank Dia. D4	Corner R R	No. of Flutes N	Stock	Type	Effective length for inclined angle			
												30°	1°	2°	3°
CRN2XLRBD0500R020N25	5	5	25	4.9	1.1°	65	6	0.2	2	●	1	26	26.9	*	*
D0500R030N25	5	5	25	4.9	1.1°	65	6	0.3	2	●	1	26	26.9	*	*
D0500R050N25	5	5	25	4.9	1.1°	65	6	0.5	2	●	1	26	26.9	*	*
D0600R020N30	6	6	30	5.85	—	70	6	0.2	2	●	2	*	*	*	*
D0600R030N30	6	6	30	5.85	—	70	6	0.3	2	●	2	*	*	*	*
D0600R050N30	6	6	30	5.85	—	70	6	0.5	2	●	2	*	*	*	*
D0600R100N30	6	6	30	5.85	—	70	6	1	2	●	2	*	*	*	*

* No interference

CRN2MS

End mill, Medium cut length, 2 flute, For copper electrodes

Work material	Copper, Copper alloys		
Dia. (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut (mm)
0.2	40000	600	0.01
0.3	40000	600	0.01
0.4	40000	800	0.01
0.5	40000	960	0.015
0.6	40000	1200	0.02
0.7	40000	1400	0.02
0.8	40000	1600	0.03
0.9	40000	1800	0.04
1	40000	2000	0.06
1.5	40000	3000	0.12
2	30000	3000	0.18
2.5	24000	2600	0.25
3	20000	2300	0.30
4	15000	2000	0.40
5	12000	1600	0.50
6	10000	1400	0.60
8	8000	1000	0.80
10	6400	900	1.00
12	5400	820	1.00

Depth of cut		
	D: Dia.	

- 1) If the rigidity of the machine or the workpiece installation is very low, or chattering and noise are generated, please reduce the revolution and the feed rate proportionately.
- 2) When sinking, please lower the feed rate by 70%.

CRN4JC

End mill, Semi long cut length, 4 flute, For copper electrodes

Work material	Copper, Copper alloys	
Dia. (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)
3	10600	280
4	8000	330
5	6400	380
6	5300	420
8	4000	460
10	3200	460
12	2700	460

Depth of cut		
	D: Dia.	

- 1) If the rigidity of the machine or the workpiece installation is very low, or chattering and noise are generated, please reduce the revolution and the feed rate proportionately.
- 2) If the depth of cut is shallow, the revolution and feed rate can be increased.
- 3) When cutting copper tungsten alloy, please set the revolution and the feed rate at under 70% of the table value.
- 4) Water-soluble cutting fluid is recommended.

RECOMMENDED CUTTING CONDITIONS FOR CRN END MILLS

CRN2XL

End mill, 2 flute, Long neck, For copper electrodes


Work material		Copper, Copper alloys		
Dia. (mm)	Neck length (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut (mm)
0.2	0.5	40000	800	0.004
	1.0	40000	700	0.003
	1.5	40000	600	0.002
0.3	1	40000	800	0.007
	3	40000	600	0.002
0.4	2	40000	950	0.007
	4	40000	800	0.003
	6	40000	600	0.001
0.5	2	40000	950	0.01
	4	40000	800	0.005
	6	40000	700	0.002
0.8	4	40000	1200	0.02
	6	40000	1200	0.015
	8	40000	1000	0.01
1	6	40000	2000	0.04
	8	40000	2000	0.03
	10	30000	1200	0.02
	12	30000	1000	0.015
1.5	6	40000	2400	0.10
	8	40000	2200	0.09
	10	40000	2000	0.08
	12	30000	1800	0.05
	16	20000	1200	0.03
	20	15000	800	0.02
2	6	40000	2400	0.18
	8	40000	2200	0.15
	10	40000	2000	0.12
	12	30000	1500	0.10
	16	30000	1000	0.06
	20	15000	600	0.03
2.5	8	40000	3000	0.20
	12	40000	2800	0.15
	16	30000	2100	0.10
	20	20000	1000	0.08
3	20	20000	2000	0.12
4	20	15000	2000	0.30
5	25	12000	1500	0.35
6	30	10000	1200	0.40


- 1) If chattering and noise occur, reduce the revolution and the feed rate proportionately.
- 2) When high machining accuracy is needed, we recommend lowering the feed rate. Cutting conditions may differ considerably due to the overhang (milling depth and neck length), depth of cut, and machine tool conditions. Please use the above table as a standard starting point.
- 3) If the depth of cut is shallow, the revolution and feed rate can be increased.
- 4) Water-soluble cutting fluid is recommended.

CRN2MB

Ball nose, Medium cut length, 2 flute, For copper electrodes

Work material	Copper, Copper alloys				
	$\alpha \leq 15^\circ$		$\alpha > 15^\circ$		Depth of cut (mm)
	Revolution (min ⁻¹)	Feed rate (mm/min)	Revolution (min ⁻¹)	Feed rate (mm/min)	
R0.2	40000	1600	40000	1200	0.02
R0.3	40000	3200	40000	1600	0.03
R0.4	40000	6400	40000	2400	0.05
R0.5	40000	8000	40000	3200	0.06
R0.75	40000	9600	40000	4000	0.09
R1	40000	9600	39000	4700	0.11
R1.25	40000	12000	30000	4500	0.12
R1.5	40000	12000	27000	4300	0.13
R2	32000	11000	20000	3600	0.15
R2.5	25000	9000	16000	2900	0.20
R3	21000	8400	13000	2600	0.25
R4	16000	6400	10000	2000	0.30
R5	13000	5200	8000	1700	0.50
R6	9000	3600	6000	1300	0.50

Depth of cut	 <p style="text-align: right;">R:Radius</p>
--------------	---



- 1) α is the inclination of the machined surface.
- 2) If the rigidity of the machine or the workpiece installation is very low, or chattering and noise are generated, please reduce the revolution and the feed rate proportionately.
- 3) When applying a lower revolution, reduce the feed rate proportionately.
- 4) Cutting conditions may be considerably different due to the overhang (milling depth), depth of cut, and machine tools. Please use the above table as a standard.


RECOMMENDED CUTTING CONDITIONS FOR CRN END MILLS

CRN2XLB

Ball nose, Long neck, 2 flute, For copper electrodes

Work material		Copper, Copper alloys		
R (mm)	Neck length (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut (mm)
R0.1	0.5	40000	800	0.003
	1.0	40000	600	0.002
	1.5	40000	400	0.001
R0.15	1	40000	1200	0.007
	2	40000	800	0.003
R0.2	1	40000	2000	0.015
	2	40000	1300	0.01
	3	40000	800	0.005
R0.25	2	40000	2000	0.02
	4	40000	1200	0.01
	6	36000	600	0.006
	10	26000	200	0.002
R0.3	2	40000	3200	0.03
	6	40000	1200	0.008
	10	30000	500	0.003
R0.4	4	40000	4000	0.02
	6	40000	2500	0.02
	10	30000	700	0.008
R0.5	4	40000	6400	0.05
	6	40000	4800	0.03
	8	40000	3000	0.02
	10	33000	2000	0.01
	16	18000	500	0.008
20	13000	250	0.005	

Work material		Copper, Copper alloys		
R (mm)	Neck length (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut (mm)
R0.75	8	40000	8000	0.07
	12	35000	4500	0.04
	16	20000	2000	0.03
	20	12000	900	0.02
R1	8	40000	9600	0.10
	10	40000	6400	0.08
	12	40000	6000	0.08
	16	30000	3000	0.05
	20	20000	2000	0.04
R1.5	30	10000	800	0.02
	16	40000	12000	0.10
	25	25000	6000	0.08
R2	35	6000	700	0.06
	16	32000	11000	0.15
	20	32000	9000	0.15
	30	20000	4500	0.10
	40	15000	3000	0.08
R2.5	50	8000	1000	0.05
	20	25000	9500	0.20
	30	20000	3300	0.15
R3	30	21000	8400	0.20
	50	20000	3000	0.15

Depth of cut		R:Radius
--------------	--	----------

- 1) If the rigidity of the machine or the workpiece installation is very low, or chattering and noise are generated, please reduce the revolution and the feed rate proportionately. When high machining accuracy is needed, we recommend lowering the feed rate.
- 2) Cutting conditions may be considerably different due to the overhang (milling depth), depth of cut, and machine tools. Please use the above table as a standard.
- 3) If the depth of cut is shallow, the revolution and feed rate can be increased.

CRN2MRB

Corner radius end mill, Medium cut length, 2 flute

Work material		Copper, Copper alloys			
Dia. (mm)	Corner radius (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut	
				ap (mm)	ae (mm)
6	R0.2, R0.3, R0.5	10000	1400	6	0.6
	R1	10000	1700	6	0.6
8	R0.3, R0.5	8000	1000	8	0.8
	R1	8000	1200	8	0.8
10	R0.3, R0.5	6400	900	10	1.0
	R1	6400	1100	10	1.0
12	R0.3, R0.5	5400	800	12	1.0
	R1	5400	1000	12	1.0
Depth of cut					



- 1) If the rigidity of the machine or the workpiece installation is very low, or chattering and noise are generated, please reduce the revolution and the feed rate proportionately. When high machining accuracy is needed, we recommend lowering the feed rate.
- 2) When applying a lower revolution, reduce the revolution and the feed rate proportionately.
- 3) Cutting conditions may be considerably different due to the overhang (milling depth), depth of cut, and machine tools. Please use the above table as a standard.

CRN2XLRB

Corner radius end mill, Short cut length, 2 flute, Long neck

Slotting

Contour Cutting

Work material			Copper, Copper alloys			Copper, Copper alloys			
Dia. (mm)	Corner radius (mm)	Neck length (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut	
								ap (mm)	ae (mm)
0.5	R0.05, R0.1	4	40000	800	0.005	40000	1500	0.01	0.1
		6	40000	700	0.003	40000	1000	0.005	0.1
0.8	R0.05, R0.1	6	40000	1200	0.02	40000	2500	0.02	0.15
		8	40000	1200	0.015	40000	1600	0.01	0.15
1	R0.1, R0.3	8	40000	2000	0.03	40000	3000	0.03	0.2
		10	35000	1600	0.025	35000	2000	0.025	0.2
		12	30000	1200	0.02	30000	1800	0.02	0.2
1.5	R0.1, R0.2, R0.3	12	30000	1500	0.05	40000	4500	0.04	0.3
		20	20000	1000	0.02	20000	2000	0.02	0.3
2	R0.1, R0.2 R0.3, R0.5	12	30000	1500	0.1	40000	4500	0.08	0.4
		16	30000	1000	0.06	30000	3000	0.05	0.4
		20	20000	600	0.04	20000	2000	0.04	0.4
3	R0.2, R0.3 R0.5	20	20000	2000	0.12	35000	6000	0.1	0.6
		20	20000	2200	0.12	35000	8000	0.1	0.6
4	R0.2, R0.3 R0.5	20	15000	2000	0.25	32000	5000	0.15	0.8
		20	15000	2200	0.25	32000	7000	0.15	0.8
5	R0.2, R0.3 R0.5	25	12000	1500	0.3	22000	5000	0.2	1.0
		25	12000	1700	0.3	22000	7000	0.2	1.0
6	R0.2, R0.3, R0.5 R1	30	10000	1200	0.4	20000	5000	0.25	1.2
		30	10000	1500	0.4	20000	7000	0.25	1.2
Depth of cut			 <p style="text-align: right;">D: Dia.</p>						

- 1) If the rigidity of the machine or the workpiece installation is very low, or chattering and noise are generated, please reduce the revolution and the feed rate proportionately. When high machining accuracy is needed, we recommend lowering the feed rate.
- 2) When applying a lower revolution, reduce the revolution and the feed rate proportionately.
- 3) Cutting conditions may be considerably different due to the overhang (milling depth), depth of cut, and machine tools. Please use the above table as a standard.



www.mitsubishicarbide.com

MMC HARTMETALL GmbH
Comeniusstr. 2, 40670 Meerbusch, Germany
Tel. +49-2159-91890 Fax +49-2159-918966
e-mail marketing@mmchg.de

MITSUBISHI MATERIALS ESPAÑA, S.A.
C/Emperador 2, 46136 Museros, Valencia, Spain
Tel. +34-96-144-1711 Fax +34-96-144-3786
e-mail mme@mmevalencia.com

MITSUBISHI HARDMETAL RUSSIA OOO LTD.
ul. Bolschaja Pochtovaja, d.36, str.1 105082 Moscow, Russia
Tel. +007-095-72558-85 Fax +007-095-72558-85
e-mail mmc-moscow@lescom.ru

MMC HARDMETAL U.K. LTD.
Mitsubishi House, Galena Close, Tamworth, B77 4AS, U.K.
Tel. +44-1827-312312 Fax +44-1827-312314
e-mail sales@mitsubishicarbide.co.uk

MMC ITALIA S.r.l.
V.le delle Industrie 20/5, 20020 Arese (Mi)
Tel. +39-02 93 77 03 1 Fax +39-02 93 58 90 93
e-mail info@mmc-italia.it

MMC METAL FRANCE S.A.R.L.
6, rue Jacques Monod, 91893 Orsay Cedex, France
Tel. +33-1-69 35 53 53 Fax +33-1-69 35 53 50
e-mail mmsales@mmc-metal-france.fr

MMC HARDMETAL POLAND Sp. z o.o.
Armii Karjowej 61, Wrocław, Poland
Tel. +48-71-3351-620 Fax +48-71-3351-620
e-mail mmc@mhpl.pl