

---

# FMAX

---

FEED MAXIMUM


MILLING CUTTER FOR ULTRA EFFICIENT,  
HIGH ACCURACY FINISHING

---



# FMAX

## HIGH FEED MILLING CUTTER FOR FINISHING

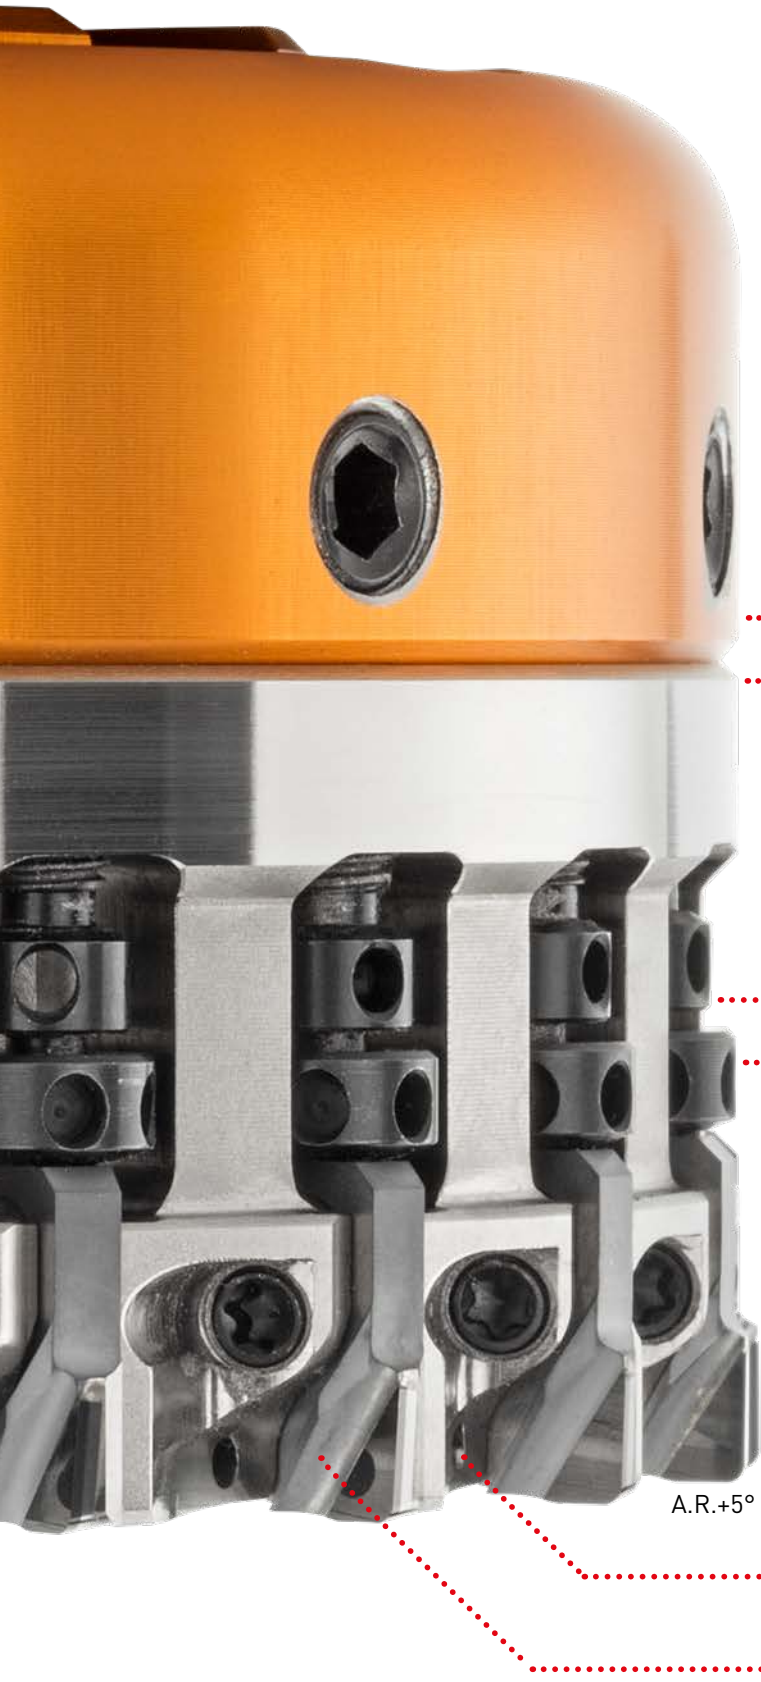

### ULTRA HIGH EFFICIENCY MACHINING

The ultra fine pitch design is ideal for high efficiency machining ( $F \geq 20$  m/min). Internal coolant and a special chipbreaker wall (body protector) provide ideal chip discharge performance.

### LIGHT WEIGHT, HIGH RIGIDITY BODY

A special alloy steel and aluminium body combine to provide rigidity and light weight.

..... Aluminium alloy

..... Special alloy steel

### HIGH PRECISION, EASY SETTING

A combination of fine and ultra-fine pitch threads provides precise run-out adjustment ( $\leq 5 \mu$ ).

..... Fine pitch adjustment screw

..... Micro adjustment nut

### ECONOMICAL, MULTI-USE

A re-grinding allowance of up to 0.6 mm is possible on both the peripheral and bottom cutting edges.

..... PCD grades for machining aluminium alloys

A.R.+5° ..... New CBN grade for grey cast iron machining

..... Internal coolant

..... Body protector


# CLASSIFICATION

Series	Use	Specification	DCON MS	Minimum			Maximum		
				DC	ZEFP	WT	DC	ZEFP	WT
FMAX	High feed finish milling cutter	Light weight, High rigidity body	mm	—	—	—	160	16	3.30
		Alloy steel and aluminium body	mm	80	14	1.08	125	24	3.39
FMAX-LW	High feed finish milling cutter	Light weight, High rigidity body	mm	100	10	1.06	125	14	1.44
	Compact and smaller machining centres	Alloy steel and aluminium body	mm		16	1.11		20	1.48
FMAX-40/50/63	High feed finish milling cutter	Alloy steel body	mm	40	4	0.24	63	10	0.67
	Small Diameter				6	0.23		12	0.66
<b>NEW</b> FMAX-MB	For Low Rigidity Conditions	Coarse pitch type	mm	50	4	0.38	125	6	3.81

**NEW**

## FMAX-MB


By reducing the number of teeth, finishing can be easily performed even if the machine or work material is not rigid. Tool installation costs can also be reduced while maintaining the existing insert mounting and cutting edge adjustment functions.

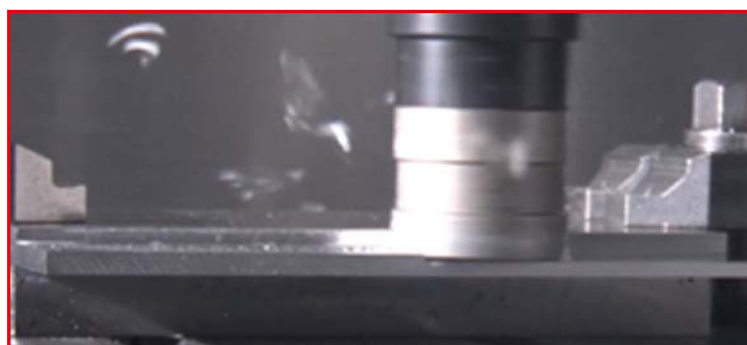

# INSERTS FOR SPECIAL APPLICATIONS


## GENERAL PURPOSE INSERTS

CBN inserts for gray cast iron reduce the length of the wiper edge and provide excellent surface finishes with low cutting forces. These inserts are disposable and therefore economical because they don't require re-grinding.

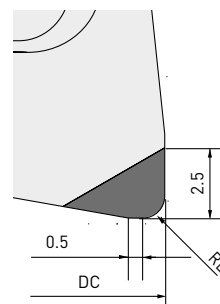


## LONG EDGE INSERTS

The long edge insert is capable of finish cutting castings with a gate. This makes it possible to reduce the number of cutter passes, thereby shortening cycle times.

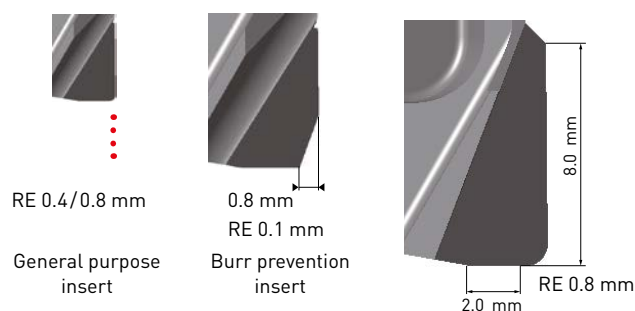


## DESIGNED FOR HIGH SPEEDS

Anti-fly dovetail clamping mechanism.

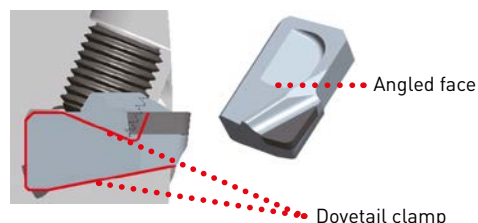

## IDEAL CHIP DISPOSAL

The body protector on the rake face forms chip shapes that are ideal for efficient dispersal. Internal coolant also aids this process. The body is compatible with all through centre coolant arbors.

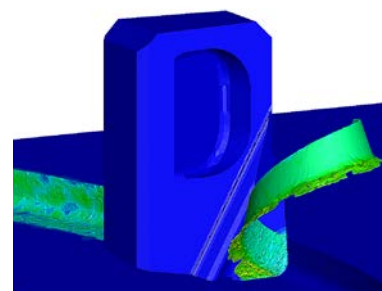

Graphical representation



### BENEFITS

- Light weight, High rigidity body
- Designed for high speeds
- PCD grade for machining aluminium alloys
- New CBN grade for grey cast iron machining
- High precision



# FMAX-MB



## FOR LOW RIGIDITY CONDITIONS



Coarse pitch type

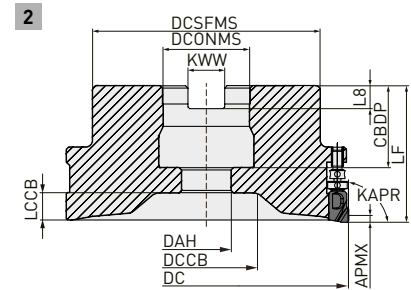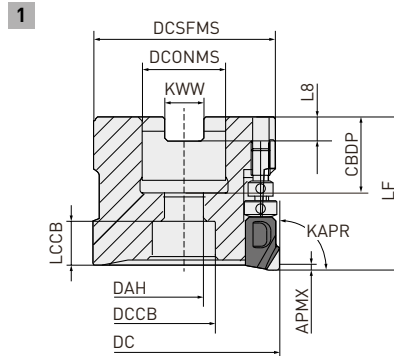

Right hand tool holder only

### ARBOR TYPE

Order number	Stock	DC	DCONMS	LF	RPMX	WT	ZEFP*		Type
FMAX-050A04R	●	50	22	40	30000	0.38	4	○	1
FMAX-063A04R	●	63	22	40	30000	0.70	4	○	1
FMAX-080B04RMB	●	80	27	45	24500	1.12	4	○	2
FMAX-100B04RMB	●	100	32	50	22000	2.00	4	○	2
FMAX-125B06RMB	●	125	40	60	19600	3.81	6	○	2

\* For the maximum depth of cut (APMX), please refer to the recommended cutting conditions (ap).



### MOUNTING DIMENSIONS

Order number	CBDP	DAH	DCCB	DCSFMS	KWW	LCCB	L8	Type
FMAX-050A04R	20	11	17	47	10.4	12	6.3	1
FMAX-063A04R	20	11	17	60	10.4	12	6.3	1
FMAX-080B04RMB	24	13	30	55	12.4	11	7	2
FMAX-100B04RMB	32	17	39	75	14.4	10	8	2
FMAX-125B06RMB	36	22	45	100	16.4	12	9	2

# FMAX




## REDUCED WEIGHT MILLING CUTTER FOR USE ON SMALLER MACHINING CENTRES

N



GAMP : +5°  
GAMF : 0°

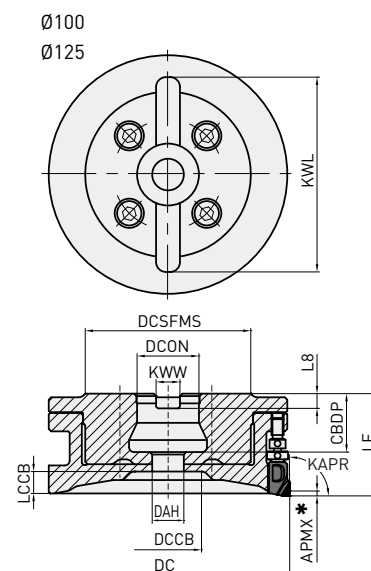

Right hand tool holder only

### ARBOR TYPE

Order number	Stock	DC	DCON	LF	RPMX	WT	ZEFP
FMAXR10010CLW	●	100	25.4	42	22000	1.06	10
FMAXR10016CLW	●	100	25.4	42	22000	1.11	16
FMAXR12514CLW	●	125	25.4	42	19600	1.44	14
FMAXR12520CLW	●	125	25.4	42	19600	1.48	20

\* For the maximum depth of cut, please refer to recommended cutting conditions (ap).  
1. 2 mm or less is the recommended maximum depth of cut for ultra high efficiency machining.















### MOUNTING DIMENSIONS

Order number	CBDP	DAH	DCCB	DCSFMS	KWW	LCCB	L8	C	KWL
FMAXR10010CLW	24	13	27	68	9.5	9	6	-	80
FMAXR10016CLW	24	13	27	68	9.5	9	6	-	80
FMAXR12514CLW	24	13	52	68	9.5	9	6	-	80
FMAXR12520CLW	24	13	52	68	9.5	9	6	-	80









# SPARE PARTS

Tool holder number						
	Insert clamp screw	Micro adjustment nut	Fine pitch adjustment screw	Cutter clamp bolt	Wrench	Adjustment pin
FMAX-040 	TSS04505S	KSN2 KSN3	KSS2	HSC08030H	TKY10T	RKY25S
FMAX-050 				HSC10030H		
FMAX-063 				HSC10030H		
FMAX-080 				HSCX12030H		
FMAX-100 				HSCX16035H		
FMAX-125 				HSCX20035H		

1. Clamp torque TSS04505S = 3.5 Nm
2. Please refer to the manual included for instructions how to seat the insert and adjust the run out.


# INSERTS

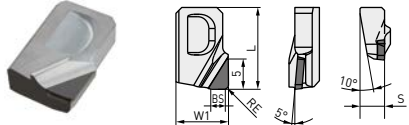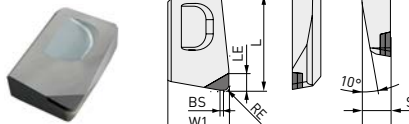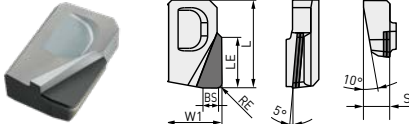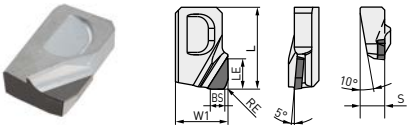Order number	MD2030	MD220	MB4120	L	LE	W1	S	BS	RE	Figure
GOER1404PXFR2	●	●		14.0	5.0	9.0	4.2	2.0	0.4	 <p>General purpose</p>
GOER1408PXFR2	●	●		14.0	5.0	9.0	4.2	2.0	0.8	
NP-GOEN1404PXSR05			★	14.0	2.5	9.0	4.2	0.5	0.4	 <p>General purpose</p>
NP-GOEN1408PXSR05			★	14.0	2.5	9.0	4.2	0.5	0.8	
GOER1408PXFR2-8		★		14.0	8.0	9.0	4.2	2.0	0.8	 <p>Long cutting edge</p>
GOER1401ZXFR2	●			14.0	5.0	9.0	4.2	2.0	0.1	 <p>Burr prevention</p>

1. If general-purpose inserts (RE = 0.4 mm, 0.8 mm) and burr prevention inserts are used together, they will not be able to achieve full performance.
2. Inserts of the same geometry should be used for all teeth.



# FEATURES OF PCD GRADES

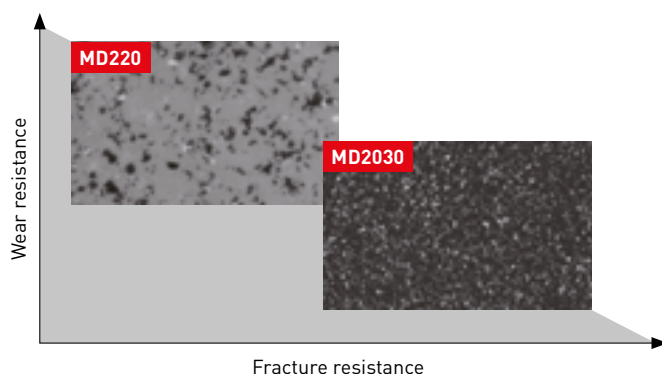


### MD220

- Focused on wear resistance
- Prevention of burrs for longer tool life

### MD2030


- Diamond sintered grade containing ultra microparticle diamond
- Optimised for milling
- Improved fracture resistance during interrupted cutting
- Offers a highly stable cutting edge that prevents burrs and gives an excellent surface finish

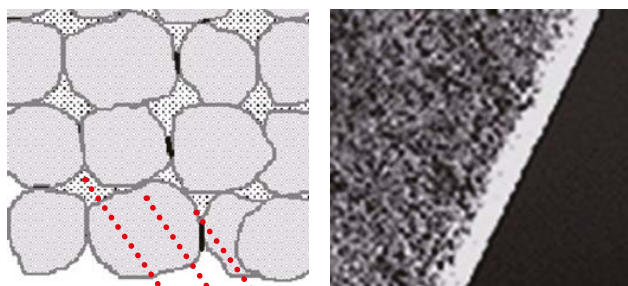

### BONDING OF DIAMOND PARTICLES

The strong bonding of the diamond particles provides a highly stable cutting edge.

Bond  
Diamond particles  
Binding material

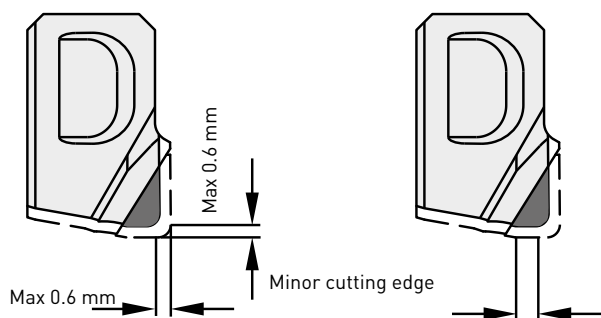

### RE-MANUFACTURING

- The maximum material to be removed is 0.6 mm.
- Use similar inserts at similar stages of refurbishing to maintain the balance of the cutter.
- After refurbishment, the minor edge will reduce in size and may affect surface finishes.

Please contact us about the optimum conditions for re-grinding.






## CBN GRADE HIGH FRACTURE RESISTANCE

### FEATURES OF MB4120

Fine CBN particles increase edge toughness and the high fracture resistance provides stability. The ideal grade for preventing fracturing, edge chipping and thermal cracks. Also capable of use when there is coolant remaining on the component from the preceding machining operation.

# FMAX


## RECOMMENDED CUTTING CONDITIONS

Material	Properties	Grade	Vc	ae	ap	fz	Cutting mode
K Gray cast iron	≤350MPa	MB4120	1000 (700–1300)	≤0.8 DC	≤0.5	0.07 (0.05–0.15)	
				≤0.2 DC	≤3.0 (0.5–3.0)		
	Si < 5 %	MD2030 MD220	2500 (2000–3000)	≤0.5 DC	≤2.5 (0.5–2.5)	0.08 (0.05–0.2)	
				≤0.8 DC	≤2.0 (0.5–2.0)		
N Aluminium alloy	5 % ≤ Si ≤ 10 %	MD2030 MD220	2500 (2000–3000)	≤0.2 DC	≤3.0 (0.5–3.0)	0.08 (0.05–0.2)	
				≤0.5 DC	≤2.5 (0.5–2.5)		
	10% < Si < 15 %	MD220 MD2030	600 (400–800)	≤0.8 DC	≤2.0 (0.5–2.0)	0.08 (0.05–0.2)	
				≤0.2 DC	≤3.0 (0.5–3.0)		
Si ≥ 15 %	MD220 MD2030	600 (400–800)	≤0.5 DC	≤2.5 (0.5–2.5)	0.08 (0.05–0.2)		
			≤0.8 DC	≤2.0 (0.5–2.0)			

1. Please adjust the depth of cut ap depending on the width of cut ae.

2. When using the long edge insert, please select the conditions depending on depths of cut (ap) excluding the depth of the gate.

### EFFECTIVE CHIP DISPOSAL RANGE

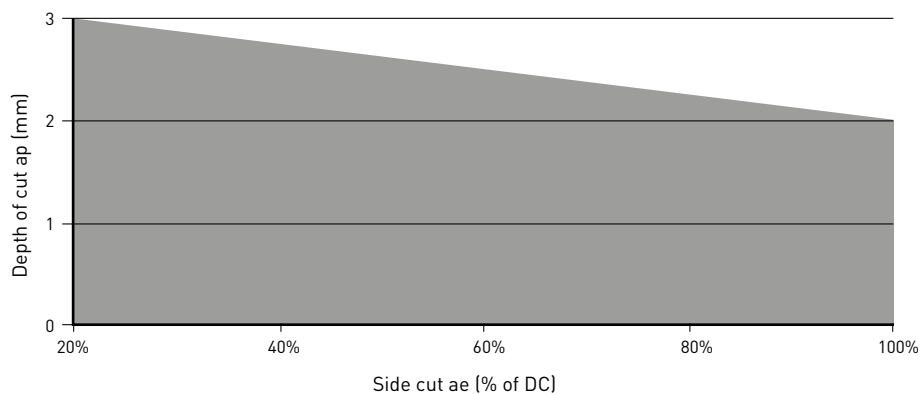


### FINISHED SURFACE ROUGHNESS (RZ) CHART IN RELATION TO REVOLUTION

Cutter body	FMAX-125B24R
Insert (Grade)	GOER1408PXFR2 (MD2030)
Workpiece	ADC12 cylinder head
n (min <sup>-1</sup> )	8.000 – 12.000
Vc (m/min)	3.140 – 4.710
fz (mm/tooth)	0.08
Vf (mm/min)	15.360 – 23.040
ap (mm)	2.0
ae (mm)	68 x 3 passes
Cutting mode	Internal through coolant 4 MPa
Machine	Horizontal machining centre

Results

The FMAX cutter offered a smooth finishing operation with predictable wear and no burrs. Even at high revolutions the FMAX cutter achieves a top quality surface finish.

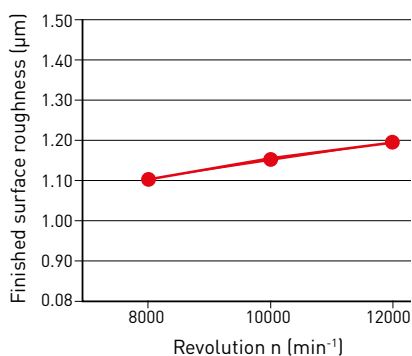

# APPLICATION EXAMPLES


## HIGH SPEED FINISHING OF CYLINDER HEAD - EXHAUST SIDE

Cutter body	FMAX-100B18R
Insert (Grade)	GOER1408PXFR2(MD2030)
Workpiece	Aluminium alloy
n (min <sup>-1</sup> )	8.000
Vc (m/min)	2.513
fz (mm/tooth)	0.2
Vf (mm/min)	28.800
ap (mm)	1.5
ae (mm)	50
Cutting mode	Wet
Machine	Horizontal machining centre
Results	More than double table feed provided increased efficiency. FMAX gave improved stability and achieved good surface finishes. Flat surface and minimal burrs.




## FINISHING OF ENGINE BLOCK - SIDE FLANGE

Cutter body	FMAX-080B14R
Insert (Grade)	GOER1408PXFR2 (MD2030)
Workpiece	Aluminium alloy
n (min <sup>-1</sup> )	8.000
Vc (m/min)	2.011
fz (mm/tooth)	0.13
Vf (mm/min)	14.560
ap (mm)	2.5
ae (mm)	20
Cutting mode	Wet
Machine	Horizontal machining centre
Results	Consistent, high accuracy machining combined with reliability and long tool life

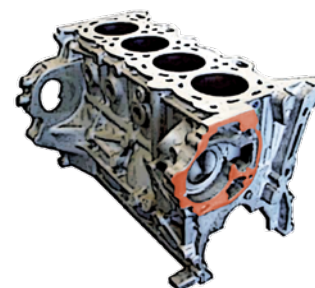

## BURR FREE FINISHING OF FLANGE SURFACE

Cutter body	FMAX-050A08R
Insert (Grade)	GOER1401ZXFR2 (MD220)
Workpiece	ADC12
n (min <sup>-1</sup> )	7.000
Vc (m/min)	1.099
fz (mm/tooth)	0.06
ap (mm)	0.3
ae (mm)	20 - 30
Cutting mode	Wet
Machine	Vertical Type (BT30)
Results	Burr prevention inserts can ensure smooth finished surfaces and maintain their effective burr prevention capabilities over long periods. Thereby enabling tool life three times longer than conventional products.

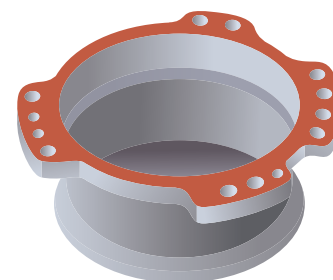









**GERMANY**

MMC HARTMETALL GMBH  
Comeniusstr. 2 . 40670 Meerbusch  
Phone +49 2159 91890 . Fax +49 2159 918966  
Email admin@mmchg.de

**U.K.**

MMC HARDMETAL U.K. LTD.  
Mitsubishi House . Galena Close . Tamworth . Staffs. B77 4AS  
Phone +44 1827 312312  
Email sales@mitsubishicarbide.co.uk

**SPAIN**

MITSUBISHI MATERIALS ESPAÑA, S.A.  
Calle Emperador 2 . 46136 Museros/Valencia  
Phone +34 96 1441711 . Fax +34 96 1443786  
Email comercial@mmevalencia.es

**FRANCE**

MMC METAL FRANCE S.A.R.L.  
6, Rue Jacques Monod . 91400 Orsay  
Phone +33 1 69 35 53 53 . Fax +33 1 69 35 53 50  
Email mmfsales@mmc-metal-france.fr

**POLAND**

MMC HARDMETAL POLAND SP. Z O.O  
Al. Armii Krajowej 61 . 50-541 Wrocław  
Phone +48 71335 1620 . Fax +48 71335 1621  
Email sales@mitsubishicarbide.com.pl

**ITALY**

MMC ITALIA S.R.L.  
Viale Certosa 144 . 20156 Milano  
Phone +39 0293 77031 . Fax +39 0293 589093  
Email info@mmc-italia.it

**TURKEY**

MMC HARTMETALL GMBH ALMANYA - İZMİR MERKEZ ŞUBESİ  
Adalet Mahallesi Anadolu Caddesi No: 41-1 . 15001 35530 Bayraklı/İzmir  
Phone +90 232 5015000 . Fax +90 232 5015007  
Email info@mmchg.com.tr

[www.mmc-carbide.com](http://www.mmc-carbide.com)

DISTRIBUTED BY:

□

□

└

└