
DCCC

INDEXABLE END MILL
FOR DEEP SHOULDER MILLING AND SLOTTING




DCCC

DESIGN FEATURES OF DCCC TYPE END MILL



HIGH RIGIDITY FOR HIGH PERFORMANCE AND RELIABILITY




Additional body clearance reduces probability of chip jamming.

BENEFITS

- Different helical flute angles prevents chattering
- High rigidity tool for performance and reliability
- High-productivity for deep 2D profile milling

**ALL 4 CUTTING EDGES OF CCMX INSERT ARE UTILIZED,
80° CORNERS IN FLUTE "A" AND 100° CORNERS ON FLUTE "B".**

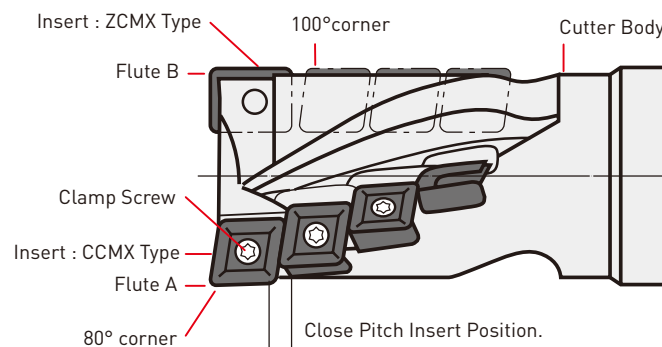


DCCC




INDEXABLE END MILL FOR DEEP SHOULDER MILLING AND SLOTTING

P **M** **K**


Ø 25 mm (Straight Shank)

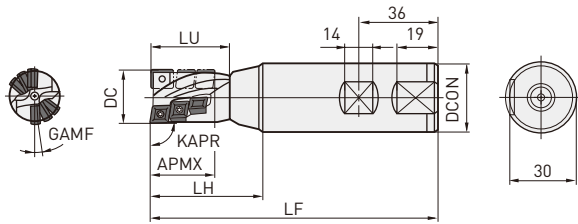

Ø 32 mm (Straight Shank)

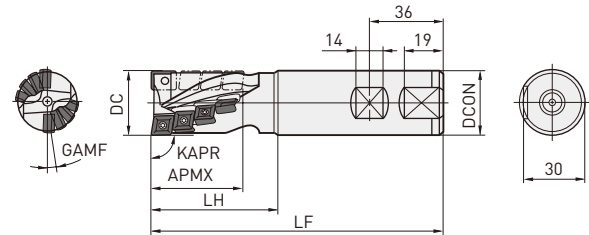

Ø 40 mm (Straight Shank)

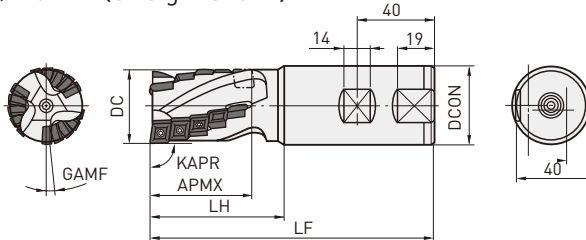

Right hand tool holder only.

Order Number	Stock	APMX	DC	DCON	LF	LH	LU	ZNF	ZNP	ZEFF	GAMF	Peripheral and Bottom Inserts		Bottom Insert (One pocket only)	
												CCMX08 3508EN-A	CCMX09 T308EN-○	ZCMX08 3508ER-A	ZCMX09 T308ER-○
DCCCR2506S32	●	27	25	32	130	50	36	2	6	2	8°	5	-	1	-
DCCCR2510S32	●	44	25	32	150	70	56	2	10	2	8°	9	-	1	-
DCCCR3208S32	●	43	32	32	140	60	-	2	8	2	8°36'	-	7	-	1
DCCCR3212S32	●	63	32	32	160	80	-	2	12	2	8°36'	-	11	-	1
DCCCR4015S40	●	53	40	40	150	70	-	3	15	3	5°31'	-	14	-	1
DCCCR4015S42	★	53	40	42	150	70	-	3	15	3	5°31'	-	14	-	1
DCCCR4024S40	●	83	40	40	180	100	-	3	24	3	5°31'	-	23	-	1
DCCCR4024S42	★	83	40	42	180	100	-	3	24	3	5°31'	-	23	-	1



SPARE PARTS


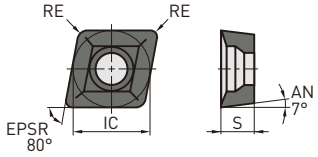

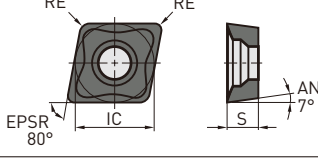

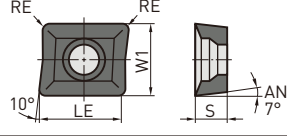

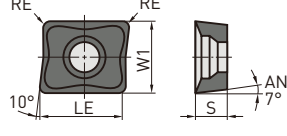
Tool Holder Number	Clamp Screw	Wrench	Peripheral and Bottom Insert	Bottom Insert (One Pocket Only)
DCCR25	CS300890T	TKY08DS	CCMX083508EN-A	ZCMX083508ER-A
DCCR32	CS350990T	TKY10DS	CCMX09T308EN-A / B	ZCMX09T308ER-A / B
DCCR40				

* Clamp Torque (N • m) : CS300890T=1.0, CS350990T=2.5

DCCC

INSERTS

Material	Cutting Conditions:				Honing: E = Round	
	●	●	●	●	✱	✱
P Steel	●	●	●	●		
M Stainless Steel	●	●	●	●		
K Cast Iron		✱			✱	

Shape	Order Number	Class	Honing	F7030	VP15TF	UP20M	UTi20T	LE	W1	IC	S	RE	Geometry
	CCMX083508EN-A	M	E	●		★	★	-	-	7.94	3.5	0.8	
	CCMX09T308EN-A	M	E	●	●	★		-	-	9.525	3.97	0.8	
	CCMX09T308EN-B	M	E	●			★	-	-	9.525	3.97	0.8	
	ZCMX083508ER-A	M	E	●			★	10.4	7.94	-	3.5	0.8	
	ZCMX09T308ER-A	M	E	●	●	●	★	12	9.525	-	3.97	0.8	
	ZCMX09T308ER-B	M	E	●		★	★	12	9.525	-	3.97	0.8	

Strong Cutting Edge



Strong Cutting Edge

DCCC

RECOMMENDED CUTTING CONDITIONS

Cutting Mode A : Slot Milling (Standard Cutting Length Type)

Cutting Mode B : Shoulder Milling (Standard Cutting Length Type)

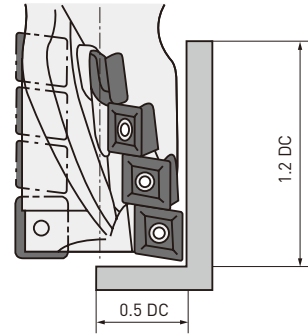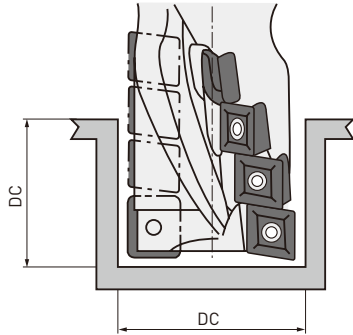


Material	Hardness	Grade	Cutting Mode	Vc	Vf		
					Ø 25 mm	Ø 32 mm	Ø 40 mm
P Mild Steel	≤ 180HB	VP15TF	A	180 (100-250)	120 (100-140)	120 (100-140)	120 (100-140)
		VP15TF	B	180 (100-250)	200 (180-220)	200 (180-220)	230 (200-250)
P Carbon Steel Alloy Steel	180-280HB	VP15TF	A	180 (100-250)	120 (100-140)	120 (100-140)	140 (120-150)
		VP15TF	B	180 (100-250)	150 (120-180)	150 (120-180)	180 (150-200)
	280-350HB	VP15TF	A	180 (100-250)	100 (80-120)	100 (80-120)	130 (100-150)
		VP15TF	B	180 (100-250)	120 (100-140)	120 (100-140)	150 (120-180)
High Alloy Steel	200-280HB	VP15TF	A	140 (100-180)	100 (80-120)	100 (80-120)	130 (100-150)
		VP15TF	B	140 (100-180)	120 (100-140)	120 (100-140)	150 (120-180)
M Stainless Steel	≤200HB	VP15TF	A	150 (100-200)	70 (50-90)	70 (50-90)	70 (50-90)
		VP15TF	B	150 (100-200)	100 (80-120)	100 (80-120)	120 (100-140)
K Cast Iron	Tensile Strength ≤450MPa	VP15TF	A	160 (100-220)	200 (180-220)	200 (180-220)	230 (200-250)
		VP15TF	B	160 (100-220)	230 (200-250)	230 (200-250)	260 (240-280)

DCCC



POWER CONSUMPTION

- Please use the chart below for reference, please select the conditions that suits the machines power.
- Chip Discharge Q ($\text{mm}^3/\text{min.}$) = Table Feed x Depth of Cut x Cutting Width /1000

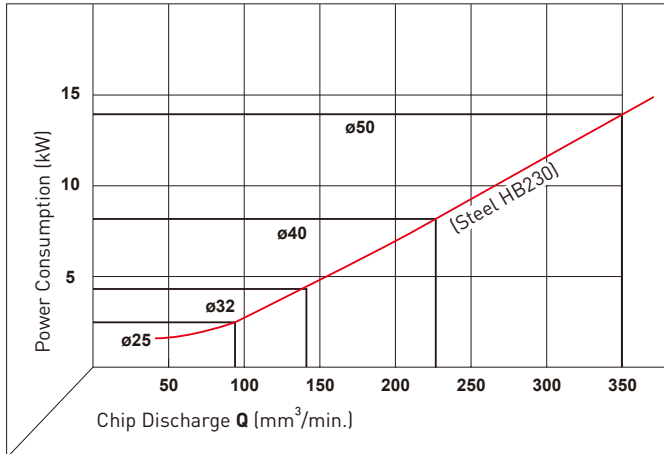

FOR USE OF LONG CUTTING LENGTH TYPE

- Since the overhang from the milling chuck is long, a large width of cut will cause chattering and tool breakage.
- Keep the width of cut small and the depth of cut in axial direction large. (See the following illustration.)

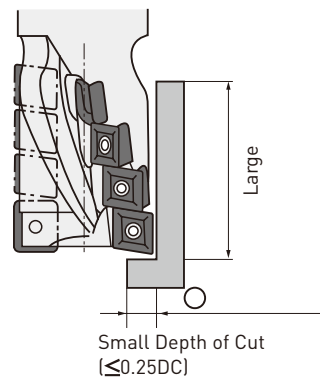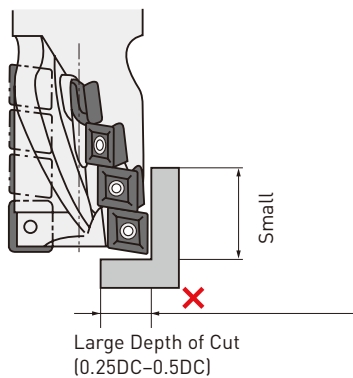

GERMANY

MMC HARTMETALL GMBH
Comeniusstr. 2 . 40670 Meerbusch
Phone +49 2159 91890 . Fax +49 2159 918966
Email admin@mmchg.de

U.K.

MMC HARDMETAL U.K. LTD.
Mitsubishi House . Galena Close . Tamworth . Staffs. B77 4AS
Phone +44 1827 312312 . Fax +44 1827 312314
Email sales@mitsubishicarbide.co.uk

SPAIN

mitsubishi MATERIALS ESPAÑA, S.A.
Calle Emperador 2 . 46136 Museros/Valencia
Phone +34 96 1441711 . Fax +34 96 1443786
Email comercial@mmevalencia.es

FRANCE

MMC METAL FRANCE S.A.R.L.
6, Rue Jacques Monod . 91400 Orsay
Phone +33 1 69 35 53 53 . Fax +33 1 69 35 53 50
Email mmfsales@mmc-metal-france.fr

POLAND

MMC HARDMETAL POLAND SP. Z O.O
Al. Armii Krajowej 61 . 50-541 Wrocław
Phone +48 71335 1620 . Fax +48 71335 1621
Email sales@mitsubishicarbide.com.pl

RUSSIA

MMC HARDMETAL 000 LTD.
Electrozavodskaya St. 24 . build. 3 . Moscow . 107023
Phone +7 495 725 58 85 . Fax +7 495 981 39 79
Email info@mmc-carbide.ru

ITALY

MMC ITALIA S.R.L.
Viale Certosa 144 . 20156 Milano
Phone +39 0293 77031 . Fax +39 0293 589093
Email info@mmc-italia.it

TURKEY

MMC HARTMETALL GMBH ALMANYA - İZMİR MERKEZ ŞUBESİ
Adalet Mahallesi Anadolu Caddesi No: 41-1 . 15001 35530 Bayraklı /İzmir
Phone +90 232 5015000 . Fax +90 232 5015007
Email info@mmchg.com.tr

www.mitsubishicarbide.com | www.mmc-hardmetal.com


DISTRIBUTED BY:

□

□

L

┘

Order Code: B244E 

Published: 2016.06 (-), Printed in Germany