

BRP

MULTI FUNCTIONAL MILLING




MULTI FUNCTIONAL MILLING

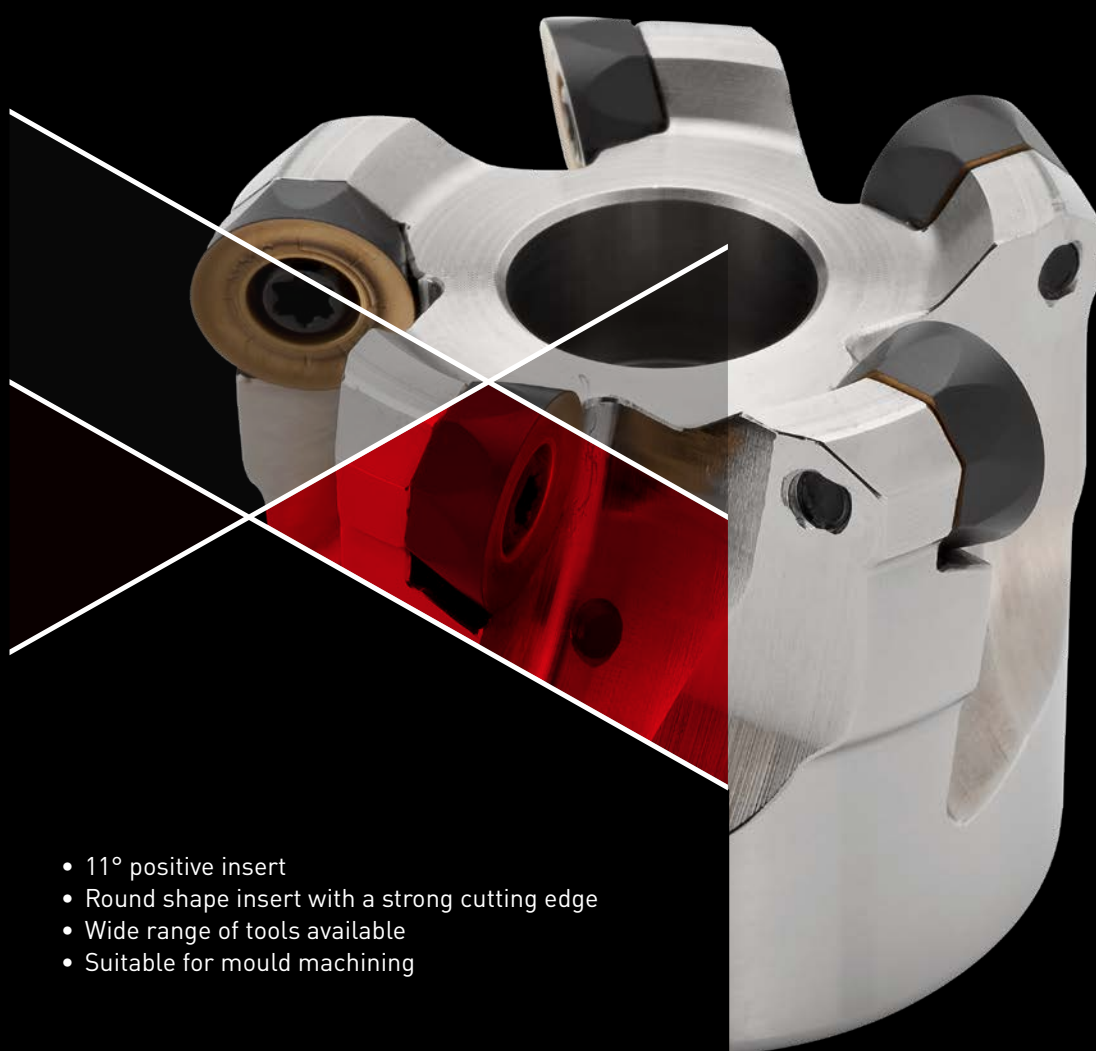


- 11° positive insert
- Round shape insert with a strong cutting edge
- Wide range of tools available
- Suitable for mould machining

BRP

PREVENTION OF INSERT MOVEMENT

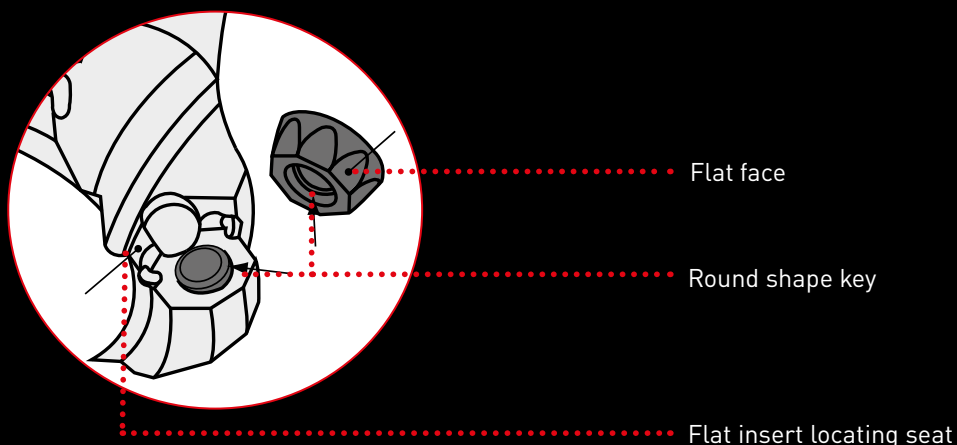


A flat insert locating seat and matching insert face prevents the insert from rotating while cutting. A round shape key prevents insert movement by absorbing the cutting load and resisting the centrifugal force caused by the rotation of the tool.

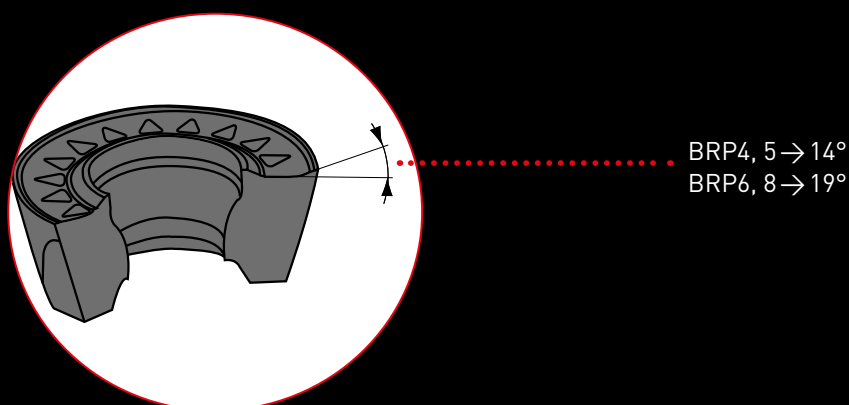

JS chipbreaker with a large rake angle provides excellent sharpness. The feed rate can be increased by 15 % and the improved chip control helps to prevent insert fracturing.


PREVENT CHATTERING / VIBRATION

The inserts are arranged in an irregular pitch. This arrangement prevents synchronised vibration resulting in the elimination of chattering.

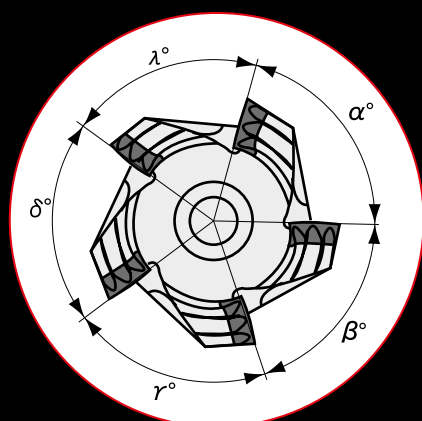

COMPLETE SERIES LINEUP

The optimum tool can be selected from a variety of insert sizes and body types.

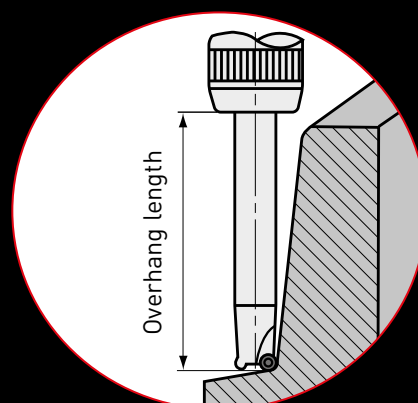

MX3030


NEW CERMET GRADE FOR A WIDER RANGE OF APPLICATIONS

Enables excellent surface finishes even at high efficiency machining conditions.

IMPROVED MACHINING EFFICIENCY BY MAINTAINING EXCELLENT SURFACE FINISHES EVEN AT LARGE DEPTHS OF CUT

Cermet has a low affinity with iron, excellent thermal stability and oxidation resistance, and is therefore a suitable grade for finishing. However, it does not have the same bonding strength as cemented carbide thereby creating the challenge to compensate for fracture resistance.

MX3030 solves the challenge with higher thermal conductivity than conventional products and has excellent thermal cracking resistance. Therefore, it is possible to suppress wear and maintain high quality surface finishes. Also, since MX3030 has excellent toughness, improved machining efficiency even at large depths of cut can be realised.

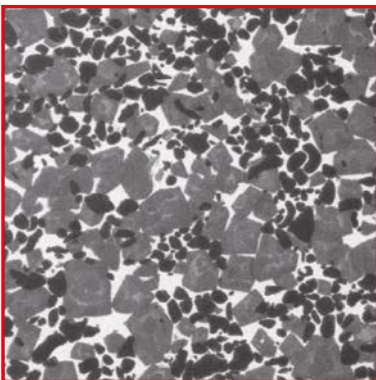

MX3030

A special alloy is used for the binder material




Fracture resistance properties increased

High hardness Ti compound particles are used in the substrate



High wear resistance properties

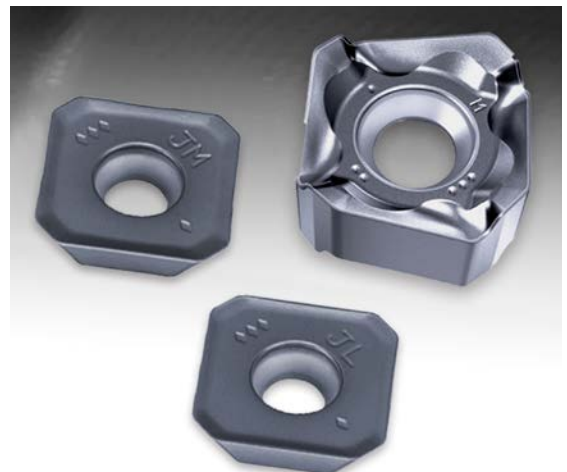

BRP




MULTI FUNCTIONAL MILLING



P M K S H



GAMP $:+5^\circ$
GAMF $:-4^\circ-0^\circ$

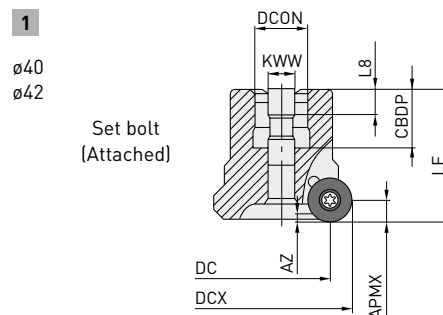

Set an attached bolt.

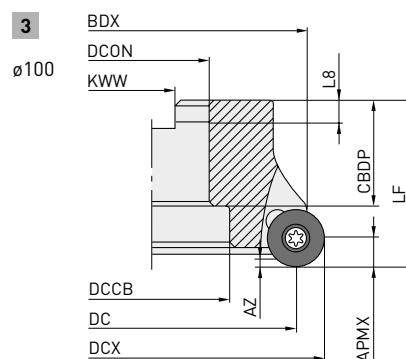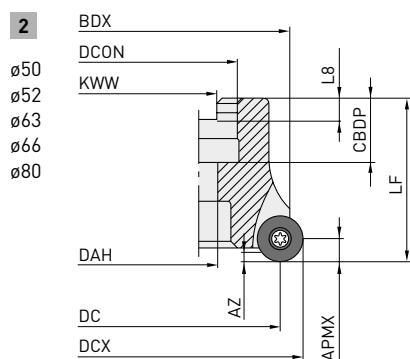

Right hand tool holder only.

ARBOR TYPE

Order number	Stock	APMX	DC	DCON	DCX	LF	AZ	WT	ZNF	Type
BRP6P-040A03R	★	6	27.9	16	40	40	4	0.4	3	1
BRP6P-050A04R	★	6	37.8	22	50	50	4	0.5	4	2
BRP6P-063A05R	★	6	50.8	22	63	50	4	0.7	5	2
BRP6N-042A04R	●	6	29.8	16	42	40	4	0.4	4	1
BRP6N-050A04R	●	6	37.8	22	50	50	4	0.5	4	2
BRP6N-052A05R	●	6	39.8	22	52	63	4	0.5	5	2
BRP6N-063A05R	●	6	50.8	22	63	50	4	0.7	5	2
BRP6N-066A06R	●	6	53.8	22	66	63	4	0.7	6	2
BRP6N-080A06R	●	6	67.8	27	80	50	4	1.2	6	2
BRP8P-063A04R	★	8	46.8	22	63	50	5.5	0.7	4	2
BRP8N-063A04R	●	8	46.8	22	63	50	5.5	0.7	4	2
BRP8N-080A06R	●	8	63.8	27	80	50	5.5	1.2	6	2
BRP8N-100B07R	●	8	83.8	32	100	50	5.5	1.6	7	3

1/1

11

BRP – MULTI FUNCTIONAL MILLING – ARBOR TYPE




MOUNTING DIMENSIONS

Order number	CBDP	DAH	DCCB	DCON	DCX	KWW	L8	Type
BRP6P-040A03R	18	-	-	16	40	8.4	5.6	1
BRP6P-050A04R	20	11	-	22	50	10.4	6.3	2
BRP6P-063A05R	20	11	-	22	63	10.4	6.3	2
BRP6N-042A04R	18	-	-	16	42	8.4	5.6	1
BRP6N-050A04R	20	11	-	22	50	10.4	6.3	2
BRP6N-052A05R	20	11	-	22	52	10.4	6.3	2
BRP6N-063A05R	20	11	-	22	63	10.4	6.3	2
BRP6N-066A06R	20	11	-	22	66	10.4	6.3	2
BRP6N-080A06R	22	13	-	27	80	12.4	8	2
BRP8P-063A04R	20	11	-	22	63	10.4	6.3	2
BRP8N-063A04R	20	11	-	22	63	10.4	6.3	2
BRP8N-080A06R	22	13	-	27	80	12.4	8	2
BRP8N-100B07R	32	-	45	32	100	14.4	8	3

1/1



SPARE PARTS


Tool holder type	 *1 Clamp screw	 Wrench	 Set bolt
BRP6	TS43	TKY15D	HDS08030
BRP8	TS54	TKY25D	-

*1 Clamp torque (N • m): TS43 = 3.5, TS54 = 7.5

BRP

RAMPING

Ramp angle and cutting length

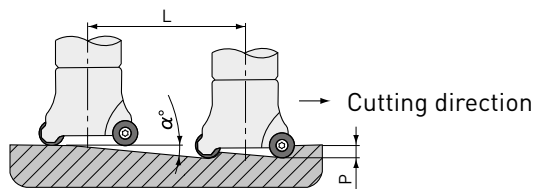

Formula for min cutting length,
L min, according to max. ramp angle

$$L = \frac{P}{\tan \alpha} \text{ (mm)}$$

Type	Tool diameter ∅	Max. ramp angle [°] α° max	tan α	Min. cutting length according to max. ramp angle L min(mm)*				
				P=2 mm	P=4 mm	P=5 mm	P=6 mm (max.)	P=8 mm (max.)
BRP4	16	12.2	0.216	9	18	-	-	-
	20	14.52	0.259	7	15	-	-	-
	25	8.8	0.155	12	25	-	-	-
BRP5	16	4.52	0.079	25	50	63	-	-
	20	11.4	0.202	9	19	24	-	-
	25	14.4	0.257	7	15	19	-	-
	32	8.37	0.147	13	27	33	-	-
BRP6	32	15.91	0.285	7	14	17	21	-
	40	10.29	0.181	11	22	27	33	-
	50	7.12	0.125	16	32	40	48	-
	63	5.08	0.089	22	44	56	67	-
	80	3.69	0.064	31	62	77	93	-
BRP8	40	18.86	0.342	5	11	14	17	23
	50	11.91	0.211	9	18	23	28	37
	63	8.01	0.141	14	28	35	42	56
	80	5.60	0.098	20	40	50	61	81
	100	4.13	0.072	27	55	69	83	110


1/1

* Decimal points are omitted for values of L min

BRP

HELICAL MILLING

Cutting hole diameter and depth of cut.

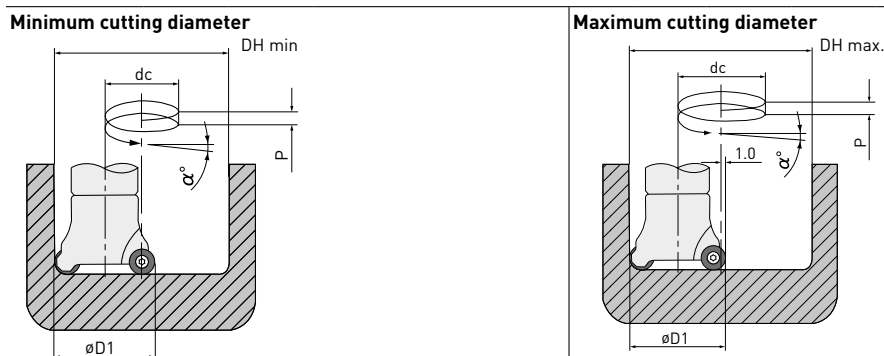

Type	Tool diameter $\phi D1$	Indication angle (α°)		Indication angle (α°)					Indication angle (α°)		Indication angle (α°)				
		ϕDH^{*1}	ϕdc^{*2}						ϕDH^{*1}	ϕdc^{*2}					
				P=2 mm	P=4 mm	P=5 mm	P=6 mm	P=8 mm			P=2 mm	P=4 mm	P=5 mm	P=6 mm	P=8 mm
BRP4	16	24	8	4.55	9.10	-	-	-	30	14	2.60	5.20	-	-	-
	20	32	12	3.04	6.08	-	-	-	38	18	2.03	4.05	-	-	-
	25	42	17	2.15	4.29	-	-	-	48	23	1.59	3.17	-	-	-
BRP5	16	22	6	d=1 mm, $\alpha^\circ=3.04^\circ$					30	14	2.60	-	6.50	-	-
	20	30	10	3.64	-	9.10	-	-	38	18	2.03	-	5.08	-	-
	25	40	15	2.43	-	6.08	-	-	48	23	1.59	-	3.98	-	-
	32	54	22	1.66	-	4.15	-	-	62	30	1.22	-	3.04	-	-
BRP6	32	52	20	1.82	3.64	-	5.45	-	62	30	1.22	2.43	-	3.64	-
	40	68	28	1.30	2.60	-	3.90	-	78	38	0.96	1.92	-	2.88	-
	50	88	38	0.96	1.92	-	2.88	-	98	48	0.76	1.52	-	2.28	-
	63	114	51	0.72	1.43	-	2.14	-	124	61	0.60	1.20	-	1.79	-
	80	148	68	0.5	1.07	-	1.61	-	158	78	0.47	0.94	-	1.40	-
BRP8	40	64	24	-	3.04	-	4.55	6.06	78	38	-	1.92	-	2.88	3.38
	50	84	34	-	2.14	-	3.22	4.28	98	48	-	1.52	-	2.28	3.04
	63	110	47	-	1.55	-	2.33	3.10	124	61	-	1.20	-	1.79	2.39
	80	144	64	-	1.14	-	1.71	2.28	158	78	-	0.94	-	1.40	1.87
	100	184	84	-	0.87	-	1.30	1.74	198	98	-	0.74	-	1.12	1.49

1/1

*1 DH = Cutting hole diameter: ϕ (mm)

*2 dc = Tool pass diameter: ϕ (mm)


BRP4 DH min= (D1 - 4) x 2, DH max = (D1 - 1) x 2, P max = 4 (mm)
BRP5 DH min= (D1 - 5) x 2, DH max = (D1 - 1) x 2, P max = 5 (mm)
BRP6 DH min= (D1 - 6) x 2, DH max = (D1 - 1) x 2, P max = 6 (mm)
BRP8 DH min= (D1 - 8) x 2, DH max = (D1 - 1) x 2, P max = 8 (mm)
dc = (Tool pass diameter) = DH-D

BRP



MULTI FUNCTIONAL MILLING

P M K S H

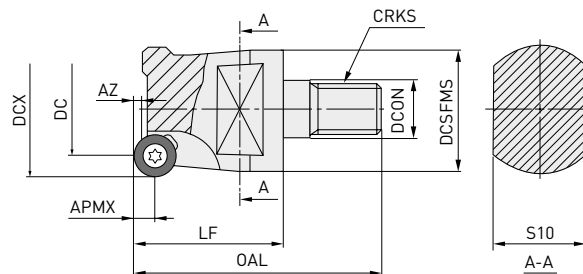

Right hand tool holder only.

SCREW-IN TYPE

Order number	Stock	APMX	DC	DCON	DCX	LF	OAL	AZ	ZNF
BRP4NR161M08	●	4	7.8	8.5	16	28	46	1	1
BRP4NR202M10	●	4	11.8	10.5	20	28	47	2	2
BRP4NR253M12	●	4	16.8	12.5	25	32	54	2	3
BRP4NR323M16	●	4	23.8	17	32	36	59	2	3
BRP5NR201M10	★	5	9.8	10.5	20	32	51	1.2	1
BRP5NR252M12	●	5	14.8	12.5	25	32	54	2.5	2
BRP5NR323M12	●	5	21.8	12.5	32	36	58	2.5	3
BRP5NR323M16	●	5	21.8	17	32	36	59	2.5	3
BRP6NR322M16	●	6	19.8	17	32	35	58	4	2
BRP6NR403M16	●	6	27.8	17	40	43	66	4	3
BRP6NR424M16	●	6	29.8	17	42	43	66	4	4

1/1



MOUNTING DIMENSIONS

Order number	CRKS	S10	DCON	DCSFMS	DCX
BRP4NR161M08	M8	10	8.5	13	16
BRP4NR202M10	M10	15	10.5	18	20
BRP4NR253M12	M12	17	12.5	21	25
BRP4NR323M16	M16	22	17	29	32
BRP5NR201M10	M10	15	10.5	18	20
BRP5NR252M12	M12	17	12.5	21	25
BRP5NR323M12	M12	17	12.5	21	32
BRP5NR323M16	M16	22	17	29	32
BRP6NR322M16	M16	22	17	29	32
BRP6NR403M16	M16	22	17	29	40
BRP6NR424M16	M16	22	17	29	42

1/1



BRP – MULTI FUNCTIONAL MILLING – SCREW-IN TYPE







SPARE PARTS

Tool holder type	Insert		Clamp screw	Wrench
	1	2		
BRP4	1 RPMW08T2M0E/T		CS250560T	TKY08F
	2 RPMT08T2M0E-JS			
BRP5	1 RPMW10T3M0E/T		CS350760T	TKY15F
	2 RPMT10T3M0E-JS		CS350860T	
BRP6	1 RPMW1204M0E/T		TS43	TKY15F
	2 RPMW1204M0E-JS			

*1 Clamp torque (N • m): CS250560T = 1.0, CS350760T = 3.5, CS350860T = 3.5, TS43 = 3.5

INSERTS

Material	AP20M	F7010	F7030	NEW MX3030	NX2525	NX4545	UTi20T	VP15TF	IC	S	Cutting conditions :
P Steel	●	●	●	●	●	●	●	●			●: Stable cutting ●: General cutting
M Stainless steel	●	●	●	●	●	●	●	●			✱: Unstable cutting
K Cast iron					●			✱			Honing:
S Heat resistant alloy, Titanium											● E: Round F: Sharp edge S: Chamfer + round
H Hardened steel											● T: Chamfer Z: Stable

Order number	Class	Edge preparation	AP20M	F7010	F7030	NEW MX3030	NX2525	NX4545	UTi20T	VP15TF	IC	S	Geometry
Right hand insert only.													
RPMW08T2M0E	M	E							●		8	2.78	  
RPMW08T2M0T	M	T							●		8	2.78	
RPMW10T3M0E	M	E			★	★		★	●		10	3.97	
RPMW10T3M0T	M	T							●		10	3.97	
RPMW1204M0E	M	E	●			★	●	●	●		12	4.76	
RPMW1204M0T	M	T					●		●		12	4.76	
RPMW1606M0E	M	E	●				●		●		16	6.35	  
RPMW1606M0T	M	T							●		16	6.35	
RPMT08T2M0E-JS	M	E			●				●	●	8	2.78	
RPMT10T3M0E-JS	M	E			●				●	●	10	3.97	
RPMT1204M0E-JS	M	E	●	●	●				●	●	12	4.76	
RPMT1606M0E-JS	M	E	●	●					●	●	16	6.35	

1/1

BRP

RECOMMENDED CUTTING CONDITIONS

Material	Properties	Grade	Vc	
Mild steel	≤180HB	F7030	250 (200 – 300)	
		VP15TF	250 (200 – 300)	
		MX3030 *	180 (130 – 250)	
		UTi20T	150 (100 – 200)	
Carbon steel Alloy steel	180 – 280HB	F7030	180 (130 – 220)	
		VP15TF	180 (130 – 220)	
		MX3030 *	150 (120 – 180)	
	280 – 380HB	UTi20T	140 (100 – 170)	
		F7030	160 (110 – 190)	
		VP15TF	160 (110 – 190)	
Pre-hardened steel	35 – 45HRC	MX3030 *	100 (80 – 160)	
		UTi20T	100 (70 – 120)	
		F7030	120 (80 – 140)	
High Alloy steel	300HB	VP15TF	120 (80 – 140)	
		UTi20T	90 (60 – 100)	
		F7030	130 (90 – 160)	
Stainless steel	≤260HB	VP15TF	130 (90 – 160)	
		UTi20T	100 (70 – 120)	
		F7030	180 (130 – 220)	
		VP15TF	180 (130 – 220)	
Gray cast iron	≤350MPa	MX3030 *	150 (120 – 180)	
		UTi20T	140 (100 – 170)	
		F7030	—	
		VP15TF	170 (130 – 220)	
	Ductile cast iron	360 – 500MPa	MX3030 *	150 (120 – 180)
			VP15TF	140 (100 – 180)
		500 – 800MPa	UTi20T	120 (80 – 140)
			F7030	—
Hardened steel	40 – 55HRC	VP15TF	110 (80 – 140)	
		UTi20T	90 (70 – 110)	
		F7030	—	
		VP15TF	60 (50 – 100)	
		UTi20T	60 (40 – 70)	

1/1

RECOMMENDED FEED PER TOOTH (MM/T.)

Type	Depth of cut (mm)							
	1	2	3	4	5	6	7	8
BRP4	0.40	0.30	0.20	0.10	—	—	—	—
BRP5	0.40	0.35	0.30	0.20	0.10	—	—	—
BRP6	0.50	0.40	0.30	0.25	0.23	0.20	—	—
BRP8	0.60	0.50	0.45	0.40	0.33	0.30	0.25	0.20

* MX3030:
Depth of cut (mm) = 3

EUROPEAN SALES COMPANIES

GERMANY

MMC HARTMETALL GMBH
Comeniusstr. 2 . 40670 Meerbusch
Phone +49 2159 91890 . Fax +49 2159 918966
Email admin@mmchg.de

U.K.

MMC HARDMETAL U.K. LTD.
Mitsubishi House . Galena Close . Tamworth . Staffs. B77 4AS
Phone +44 1827 312312
Email sales@mitsubishicarbide.co.uk

SPAIN

MITSUBISHI MATERIALS ESPAÑA, S.A.
Calle Emperador 2 . 46136 Museros/Valencia
Phone +34 96 1441711 . Fax +34 96 1443786
Email comercial@mmevalencia.es

FRANCE

MMC METAL FRANCE S.A.R.L.
6, Rue Jacques Monod . 91400 Orsay
Phone +33 1 69 35 53 53 . Fax +33 1 69 35 53 50
Email mmfsales@mmc-metal-france.fr

POLAND

MMC HARDMETAL POLAND SP. Z O.O
Al. Armii Krajowej 61 . 50-541 Wrocław
Phone +48 71335 1620 . Fax +48 71335 1621
Email sales@mitsubishicarbide.com.pl

ITALY

MMC ITALIA S.R.L.
Viale Certosa 144 . 20156 Milano
Phone +39 0293 77031 . Fax +39 0293 589093
Email info@mmc-italia.it

TURKEY

MMC HARTMETALL GMBH ALMANYA - İZMİR MERKEZ ŞUBESİ
Adalet Mahallesi Anadolu Caddesi No: 41-1 . 15001 35530 Bayraklı / İzmir
Phone +90 232 5015000 . Fax +90 232 5015007
Email info@mmchg.com.tr

www.mmc-carbide.com

DISTRIBUTED BY:

□

□

└

└

B014E 

Published by: MMC Hartmetall GmbH – A Sales Company of  MITSUBISHI MATERIALS | 2024.03