

MICRO-MINI TWIN

BORING BAR FOR HIGH PRECISION
AND SMALL PARTS MACHINING

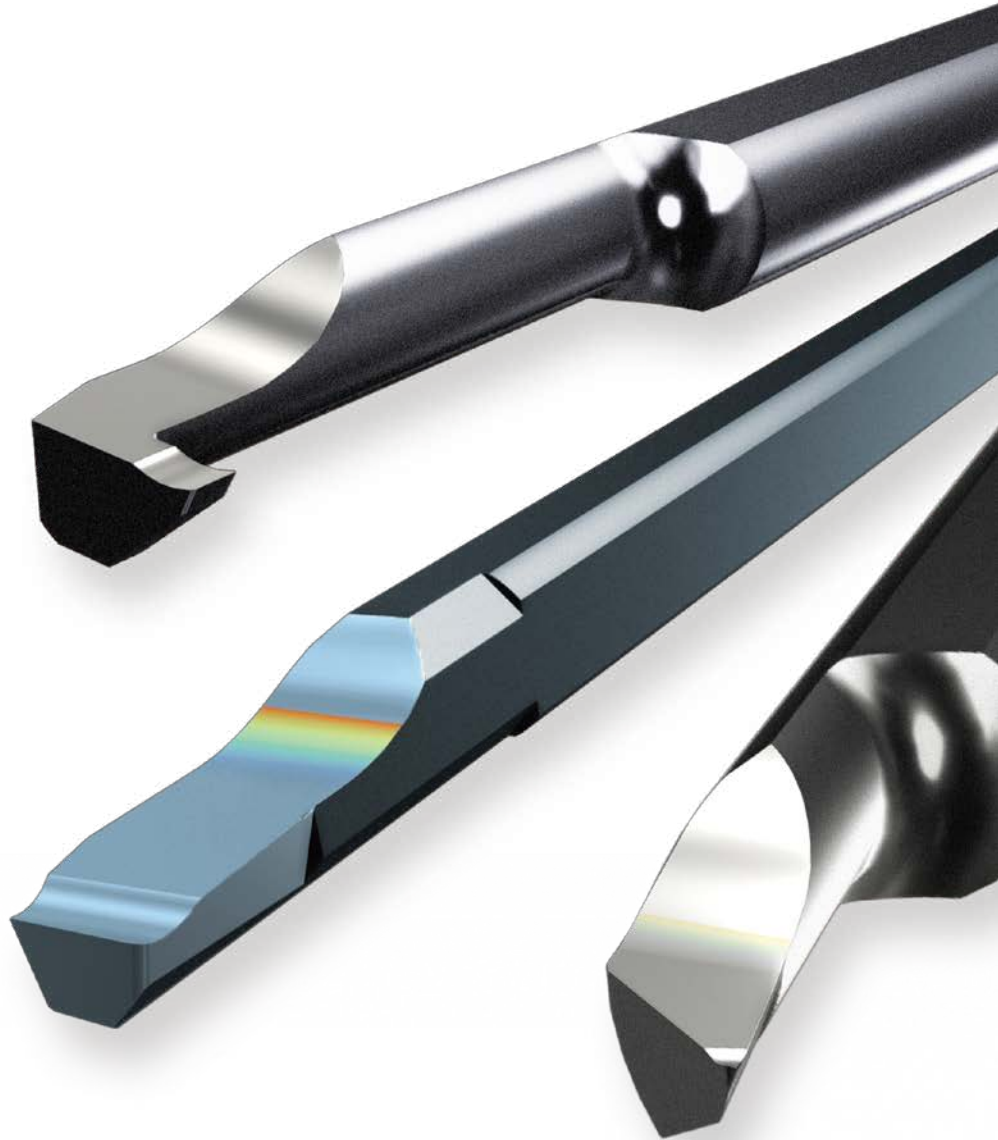

MICRO-MINI TWIN

IDEAL FOR SMALL-DIAMETER BORING OF STEELS AND STAINLESS STEEL

ECONOMICAL, SOLID SHANK TYPE WITH TWO CUTTING EDGES

A cutting edge on each end provides reduced tooling costs.

MULTI PURPOSE BORING BAR

The multi-functionality of the MICRO-MINI TWIN enables a wide application range that covers boring, grooving and threading and is available with or without a chipbreaker.


MINIMUM CUTTING DIAMETER:

Boring:	Ø 2.2 mm ~ RE: 0.05, 0.1, 0.15, 0.2
Copying:	Ø 3.5 mm ~
Grooving:	Ø 3 mm ~
Threading:	Ø 3 mm ~




AVAILABLE WITH OR WITHOUT A CHIPBREAKER

With chipbreaker

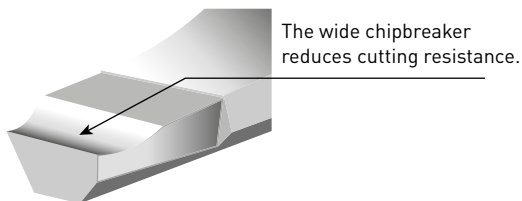

Without chipbreaker

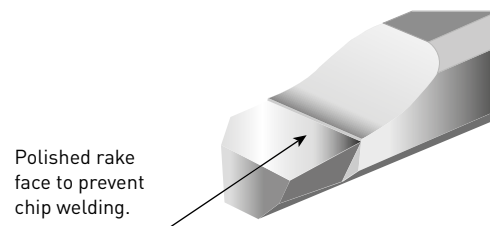

The highly polished rake face and smooth cutting edge surface provides a superior product than conventional boring bars.

CUTTING PERFORMANCE

POLISHED RAKE FACE



MACHINING OF STAINLESS STEEL

Insert	CB05RS, VP15TF
Material	1.4301 (X5CrNi18-9)
Vc (m/min)	100
fr (mm/rev)	0.02
ap (mm)	0.1
Coolant	Wet cutting



The polished rake face prevents chip welding and enables excellent component surface finishes.

CUTTING EDGE WEAR



MICRO-MINI TWIN
(Polished rake face)





Conventional



MICRO-MINI TWIN
(Polished rake face)



Conventional



NEW

SLEEVE

A sleeve specially designed for the MICRO-MINI TWIN for optimum use on Swiss-Type lathes.



Sleeve inner diameter: 2.5 – 4.5 mm
Functional length : 67 mm, 85 mm, 110 mm, 135 mm

MS9025

PVD COATED GRADES FOR HIGH PRECISION AND SMALL PARTS MACHINING


Effectively reduces notch wear whilst also providing fracture resistance.



HIGH AL-RICH (Al, Ti)N SINGLE LAYER COATING TECHNOLOGY

HIGH AL AND CONVENTIONAL COATING COMPARISON

The high Al-rich (Al,Ti)N single layer coating provides stabilisation of the high hardness phase and succeeds in dramatically improving wear, cratering and welding resistance.

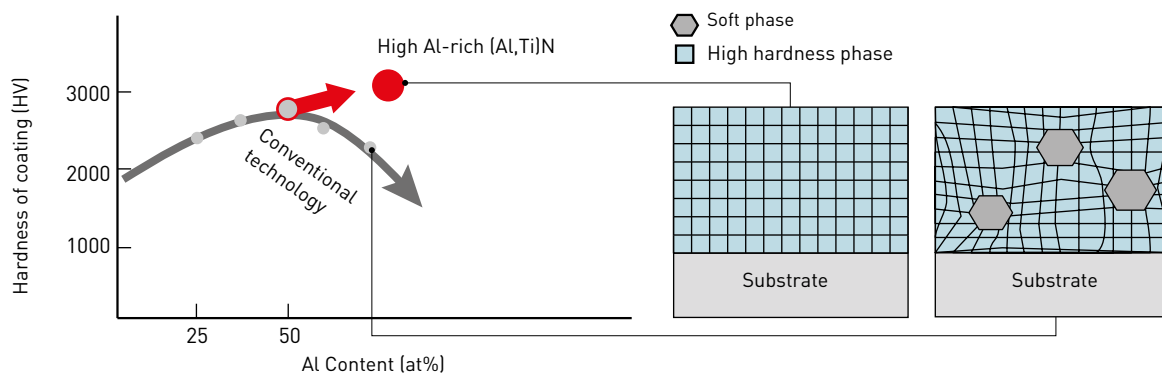


SMOOTH SURFACE OF THE COATING

The even surface of the coating has been achieved by first making the carbide substrate smooth then by promoting straight growth of the coating crystals. This leads to excellent welding resistance.

Smooth Cemented Carbide


- Straight crystal growth
- Smooth carbide surface
- Excellent welding resistance

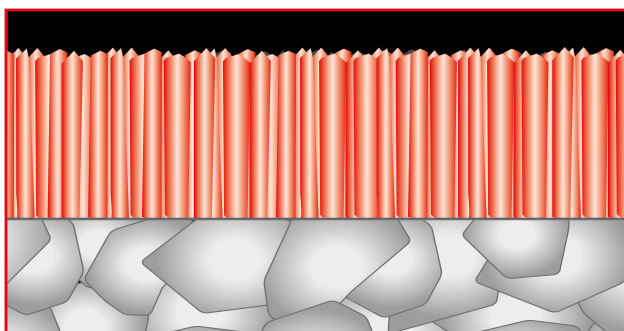

MS9025

Rough Cemented Carbide

- Random crystal growth direction
- Performance is variable due to defects and voids in the surface

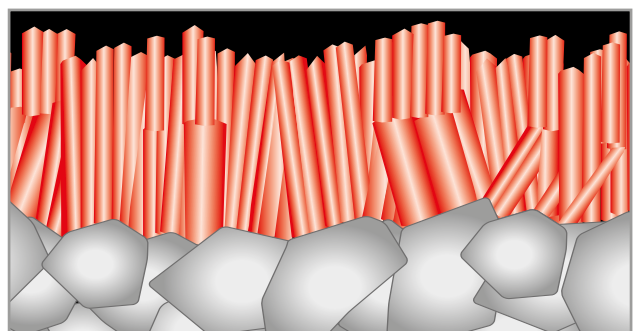

Conventional

MS9025 grade for stainless steel added to the series MICRO-MINI TWIN.

MS7025

PVD COATED GRADES FOR HIGH PRECISION AND SMALL PARTS MACHINING

A precise nano-multilayer coating provides dramatically improved welding and wear resistance.



NANO-MULTILAYER COATING


By combining the high lubrication layer with excellent welding resistance, and the high hardness layer with a greater wear resistance that suppresses the progress of wear at the nano-level, damage when machining is significantly reduced. Additionally, machining marks on the component surface are reduced.

IMPROVED QUALITY OF THE MACHINED SURFACE


The nano-level, high lubrication layer suppresses built-up edge caused by chip welding which tends to occur in low feed machining and in addition reduces machining marks on the component surface.

SURFACE FINISH

Surface Finish

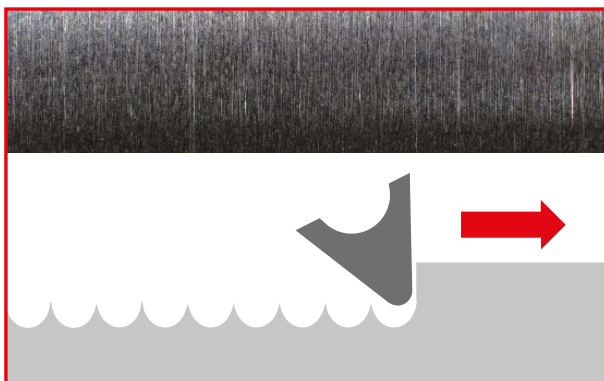

MS7025

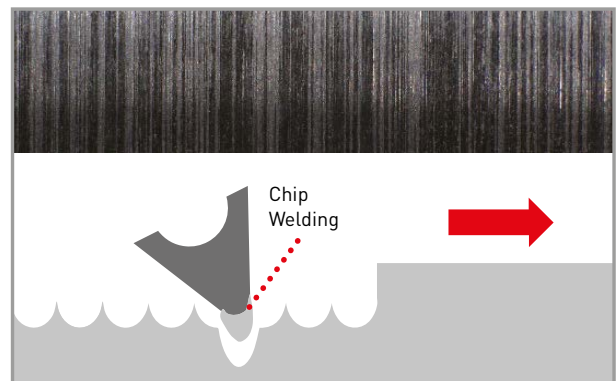

Conventional


IMPROVED MACHINED SURFACE QUALITY

MS7025 improves machining accuracy and suppresses burrs and sudden chipping by maintaining uniform, sharp cutting edges.



MS7025

Enlarged photo of the cutting edge


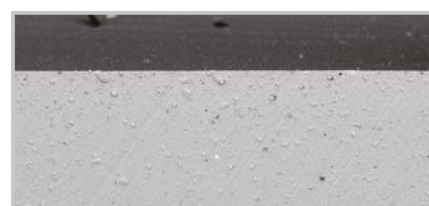


Conventional

MS7025 grade for stainless steel added to the series MICRO-MINI TWIN.

CB-TYPE

MICRO-MINI TWIN FOR INTERNAL MACHINING

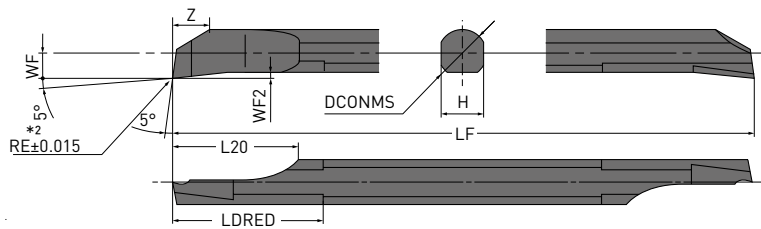

Right hand tool only.

Order number	NEW MS7025	NEW MS9025	VP15TF	TF15	Chipbreaker	DMIN*1		RE*2	DCONMS	LF	L20	LDRED	WF	WF2	H	Z
						l/d ≤ 3	l/d ≥ 3									
CB02RS			●	●	without	2.2	3.6	0.05	2.0	50	5.0	6.0	1.0	0.25	1.8	1.4
CB02RS-B	●	●	●	●	with	2.2	4.6	0.05	2.0	50	5.0	6.0	1.0	0.25	1.8	1.4
CB02RS-01			●	●	without	2.2	3.6	0.1	2.0	50	5.0	6.0	1.0	0.25	1.8	1.4
CB02RS-01B	●	●	●	●	with	2.2	4.6	0.1	2.0	50	5.0	6.0	1.0	0.25	1.8	1.4
NEW CB02RS-015B	●	●			with	2.2	4.6	0.15	2.0	50	5.0	6.0	1.0	0.25	1.8	1.4
CB02RS-02			●	●	without	2.2	3.6	0.2	2.0	50	5.0	6.0	1.0	0.25	1.8	1.4
CB02RS-02B	●	●	●	●	with	2.2	4.6	0.2	2.0	50	5.0	6.0	1.0	0.25	1.8	1.4
NEW CB025RS-B	●	●			with	2.7	4.7	0.05	2.5	50	6.25	7.5	1.25	0.30	2.25	1.8
NEW CB025RS-01B	●	●			with	2.7	4.7	0.1	2.5	50	6.25	7.5	1.25	0.30	2.25	1.8
NEW CB025RS-015B	●	●			with	2.7	4.7	0.15	2.5	50	6.25	7.5	1.25	0.30	2.25	1.8
NEW CB025RS-02B	●	●			with	2.7	4.7	0.2	2.5	50	6.25	7.5	1.25	0.30	2.25	1.8
CB03RS			●	●	without	3.2	4.2	0.05	3.0	50	7.5	9.0	1.5	0.35	2.7	2.3
CB03RS-B	●	●	●	●	with	3.2	4.8	0.05	3.0	50	7.5	9.0	1.5	0.35	2.7	2.3
CB03RS-01			●	●	without	3.2	4.2	0.1	3.0	50	7.5	9.0	1.5	0.35	2.7	2.3
CB03RS-01B	●	●	●	●	with	3.2	4.8	0.1	3.0	50	7.5	9.0	1.5	0.35	2.7	2.3
NEW CB03RS-015B	●	●			with	3.2	4.8	0.15	3.0	50	7.5	9.0	1.5	0.35	2.7	2.3
CB03RS-02			●	●	without	3.2	4.2	0.2	3.0	50	7.5	9.0	1.5	0.35	2.7	2.3
CB03RS-02B	●	●	●	●	with	3.2	4.8	0.2	3.0	50	7.5	9.0	1.5	0.35	2.7	2.3
NEW CB035RS-B	●	●			with	3.7	5.2	0.05	3.5	60	8.75	10.5	1.75	0.40	3.15	2.6
NEW CB035RS-01B	●	●			with	3.7	5.2	0.1	3.5	60	8.75	10.5	1.75	0.40	3.15	2.6
NEW CB035RS-015B	●	●			with	3.7	5.2	0.15	3.5	60	8.75	10.5	1.75	0.40	3.15	2.6
NEW CB035RS-02B	●	●			with	3.7	5.2	0.2	3.5	60	8.75	10.5	1.75	0.40	3.15	2.6
CB04RS			●	●	without	4.2	5.1	0.05	4.0	60	10.0	12.0	2.0	0.45	3.6	3.1
CB04RS-B	●	●	●	●	with	4.2	5.5	0.05	4.0	60	10.0	12.0	2.0	0.45	3.6	3.1
CB04RS-01			●	●	without	4.2	5.1	0.1	4.0	60	10.0	12.0	2.0	0.45	3.6	3.1
CB04RS-01B	●	●	●	●	with	4.2	5.5	0.1	4.0	60	10.0	12.0	2.0	0.45	3.6	3.1
NEW CB04RS-015B	●	●			with	4.2	5.5	0.15	4.0	60	10.0	12.0	2.0	0.45	3.6	3.1
CB04RS-02			●	●	without	4.2	5.1	0.2	4.0	60	10.0	12.0	2.0	0.45	3.6	3.1
CB04RS-02B	●	●	●	●	with	4.2	5.5	0.2	4.0	60	10.0	12.0	2.0	0.45	3.6	3.1
NEW CB045RS-B	●	●			with	4.7	6.0	0.05	4.5	70	11.25	13.5	2.25	0.50	4.05	3.4
NEW CB045RS-01B	●	●			with	4.7	6.0	0.1	4.5	70	11.25	13.5	2.25	0.50	4.05	3.4
NEW CB045RS-015B	●	●			with	4.7	6.0	0.15	4.5	70	11.25	13.5	2.25	0.50	4.05	3.4
NEW CB045RS-02B	●	●			with	4.7	6.0	0.2	4.5	70	11.25	13.5	2.25	0.50	4.05	3.4

1/2

*1 DMIN: Min. Cutting Diameter

*2 The RE dimension represents the size before grinding a chip breaker.
1. [MICRO-MINI TWIN is available in 1 piece in one pack.]



CB, MICRO-MINI TWIN FOR INTERNAL MACHINING

Order number	NEW MS7025	NEW MS9025	VP15TF	TF15	Chipbreaker	DMIN*1		RE*2	DCONMS	LF	L20	LDRED	WF	WF2	H	Z
						l/d ≤ 3	l/d ≥ 3									
CB05RS			●	●	without	5.2	6.0	0.05	5	70	12.5	15.0	2.5	0.55	4.5	3.9
CB05RS-B	●	●	●	●	with	5.2	6.4	0.05	5	70	12.5	15.0	2.5	0.55	4.5	3.9
NEW CB05RS-015B	●	●			with	5.2	6.4	0.15	5	70	12.5	15.0	2.5	0.55	4.5	3.9
CB05RS-02			●	●	without	5.2	6.0	0.2	5	70	12.5	15.0	2.5	0.55	4.5	3.9
CB05RS-02B	●	●	●	●	with	5.2	6.4	0.2	5	70	12.5	15.0	2.5	0.55	4.5	3.9
CB06RS			●	●	without	6.2	7.2	0.05	6	75	12.5	18.0	3.0	0.65	5.4	4.7
CB06RS-B	●	●	●	●	with	6.2	7.3	0.05	6	75	12.5	18.0	3.0	0.65	5.4	4.7
CB06RS-02			●	●	without	6.2	7.2	0.2	6	75	12.5	18.0	3.0	0.65	5.4	4.7
CB06RS-02B	●	●	●	●	with	6.2	7.8	0.2	6	75	12.5	18.0	3.0	0.65	5.4	4.7
CB07RS			●	●	without	7.2	8.6	0.05	7	85	12.5	21.0	3.5	0.75	6.3	5.5
CB07RS-B	●	●	●	●	with	7.2	8.8	0.05	7	85	12.5	21.0	3.5	0.75	6.3	5.5
CB07RS-02			●	●	without	7.2	8.6	0.2	7	85	12.5	21.0	3.5	0.75	6.3	5.5
CB07RS-02B	●	●	●	●	with	7.2	9.2	0.2	7	85	12.5	21.0	3.5	0.75	6.3	5.5
CB08RS			●	●	without	8.2	9.5	0.05	8	95	15.0	24.0	4.0	0.85	7.2	6.3
CB08RS-B	●	●	●	●	with	8.2	9.6	0.05	8	95	15.0	24.0	4.0	0.85	7.2	6.3
CB08RS-02			●	●	without	8.2	9.5	0.2	8	95	15.0	24.0	4.0	0.85	7.2	6.3
CB08RS-02B	●	●	●	●	with	8.2	9.8	0.2	8	95	15.0	24.0	4.0	0.85	7.2	6.3

2/2

*1 DMIN: Min. Cutting Diameter

*2 The RE dimension represents the size before grinding a chipbreaker.
1. [MICRO-MINI TWIN is available in 1 piece in one pack.]

CB-TYPE

RECOMMENDED CUTTING CONDITIONS

Material	Properties	Grade	Vc	f	ap	Tool overhang l/d
P	Pure iron, Free cutting steel	MS7025	80 (40 – 120)	0.03 (0.01 – 0.05)	0.2 (0.1 – 0.3)	3–5
P	Carbon steel, alloy steel	Hardness 180–350HB MS7025, VP15TF	80 (40 – 120)	0.03 (0.01 – 0.05)	0.2 (0.1 – 0.3)	3–5
M	Stainless steel	Hardness ≤200HB MS7025, MS9025, VP15TF	80 (40 – 120)	0.03 (0.01 – 0.05)	0.2 (0.1 – 0.3)	3–5
K	Gray cast iron	Tensile strength ≤350MPa VP15TF	80 (40 – 120)	0.03 (0.01 – 0.05)	0.2 (0.1 – 0.3)	3–5
N	Non-ferrous metal	— TF15	120 (80 – 160)	0.05 (0.01 – 0.08)	0.3 (0.1 – 0.5)	3–5
S	Heat resistant alloy	— MS9025	60 (40 – 80)	0.02 (0.01 – 0.03)	0.2 (0.1 – 0.3)	3–5

1/1

1. Recommend wet cutting.

CORRECT USE OF MICRO-MINI TWIN GRADES

MS7025

P	M
Steel	Stainless steel

- Specially designed to enable good surface finishes when machining stainless steels.
- For general use on a wide range of materials.

MS9025

S	M
Heat resistant alloy	Stainless steel

- Ideal for stainless steels and high efficiency machining of difficult-to-cut materials.

VP15TF

P	M	K
Steel	Stainless steel	Gray cast iron

- For general use on a wide range of materials including cast iron.



TF15

N
Non-ferrous metal

- For machining non-ferrous metals.

CR-TYPE

MICRO-MINI TWIN FOR INTERNAL COPYING

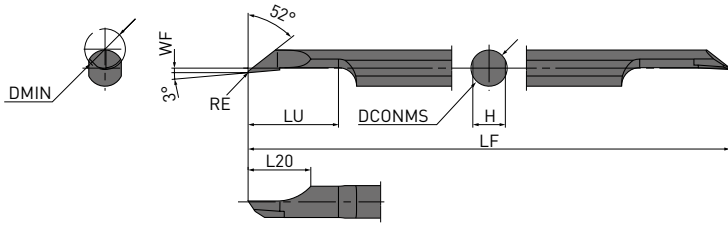

Right hand tool only.

Order number	NEW MS7025	NEW MS9025	VP15TF	TF15	Chipbreaker	DMIN	RE	DCONMS	LF	LU	L20	WF	H
CR03RS-01			●	●	without	3.5	0.1	3.0	50	8	6.0	0.15	2.7
CR03RS-01B	●	●	●	●	with	3.5	0.1	3.0	50	8	6.0	0.15	2.7
NEW CR035RS-01B	●	●			with	4.0	0.1	3.5	60	8	6.5	0.15	3.15
CR04RS-01			●	●	without	4.5	0.1	4.0	60	10	7.0	0.15	3.6
CR04RS-01B	●	●	●	●	with	4.5	0.1	4.0	60	10	7.0	0.15	3.6
NEW CR045RS-01B	●	●			with	5.0	0.1	4.5	70	10	7.5	0.15	4.05
CR05RS-01			●	●	without	5.5	0.1	5.0	70	12	8.0	0.15	4.5
CR05RS-01B	●	●	●	●	with	5.5	0.1	5.0	70	12	8.0	0.15	4.5

1/1



RECOMMENDED CUTTING CONDITIONS

Material	Properties	Grade	Vc	f		ap
				0.3RS-045RS	05RS	
P Pure iron, Free cutting steel	—	MS7025	80 (40 – 120)	0.02 (0.01 – 0.03)	0.03 (0.01 – 0.05)	0.05
P Carbon steel, alloy steel	Hardness 180–350HB	MS7025, VP15TF	80 (40 – 120)	0.02 (0.01 – 0.03)	0.03 (0.01 – 0.05)	0.05
M Stainless steel	Hardness ≤200HB	MS7025, MS9025, VP15TF	80 (40 – 120)	0.02 (0.01 – 0.03)	0.03 (0.01 – 0.05)	0.05
K Gray cast iron	Tensile strength ≤350MPa	VP15TF	80 (40 – 120)	0.03 (0.01 – 0.05)	0.03 (0.01 – 0.05)	0.05
N Non-ferrous metal	—	TF15	120 (80 – 160)	0.03 (0.01 – 0.05)	0.05 (0.01 – 0.08)	0.05
S Heat resistant alloy	—	MS9025	60 (40 – 80)	0.02 (0.01 – 0.03)	0.02 (0.01 – 0.03)	0.05



1/1

1. Recommend wet cutting.
2. The recommended tool overhang of CR type is LU + 2 mm.

PRECAUTIONS WHEN USING THE MICRO-MINI TWIN

When using a holder for general purpose / small automatic lathe:

- ☑ To avoid chipping of the 2nd cutting edge take care when inserting the boring bar into the holder. Refer to fig.1. If the 2nd edge contacts the internal face of the holder there is a possibility that it may chip.
- ☑ When using this type of holder, there is a possibility that damage to the shank and the 2nd cutting edge can occur. Make sure that the clamping screws are tightened to the set torque value. Additionally make sure that there is no clamping screw near the 2nd cutting edge as this can break the boring bar.

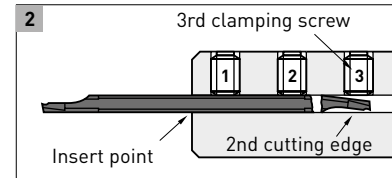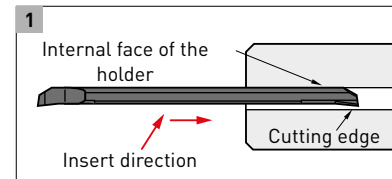


When using Mitsubishi Materials holders:

When using holders with a tool overhang of recommended quantity, ensure that the 3rd clamping screw is removed prior to machining. (RBH1620N, RBH19020N, RBH2020N and RBH2520N do not have the 3rd screw.) The set torque value for clamping screw is 2.0 Nm.

When using a square type holder:

- ☑ When installing the boring bar into the holder, tighten the clamp screws after ensuring the flats on the tool holder are parallel to the reference flats on the MICRO-MINI bar. Refer to fig.3.
- ☑ Make sure that the clamping screws are tightened to the recommended values.
- ☑ Do not tighten the clamp screw without a bar in place, otherwise the bridge will be deformed.

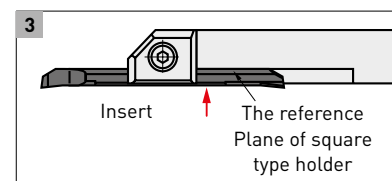

Tighten the clamping screw ensuring the MICRO-MINI TWIN boring bars is in contact with the reference plane of square type holder.


MACHINING METHODS OF THE CR TYPE

By drilling a pre-prepared hole, the machining time will be shortened and chip control will be improved.


Insert	CR05RS-01B
Workpiece material	C20
Vc (m/min)	80
f (mm/rev)	0.05
ap (mm)	0.05
Coolant	Wet cutting

PROFILE TURNING

Machining a workpiece without a pre-prepared hole




Machining a workpiece with a pre-prepared hole




INNER END FACING

Machining a workpiece without a pre-prepared hole




Machining a workpiece with a pre-prepared hole



NOTES FOR USE


PROFILE TURNING, INNER END FACING



The cutting edge should not cross the centre line of the workpiece.

If the cutting edge crosses the centre line of a workpiece, the cutting edge can fracture.

COPYING

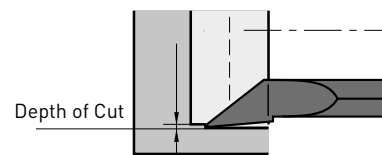


The depth of cut should be smaller than the corner radius value.

With depths of cut larger than the corner radius value, burrs will be formed.

CG-TYPE

MICRO-MINI TWIN FOR INTERNAL GROOVING

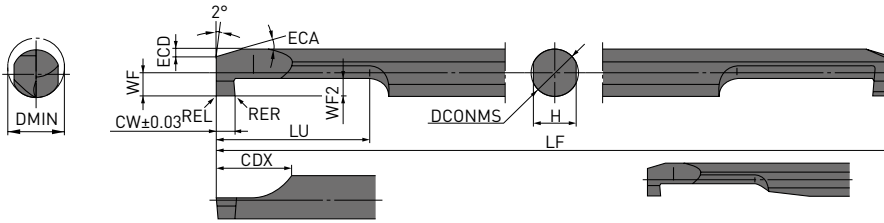

* CG0300RS-00B (VP15TF, TF15) only.

Order number	NEW	NEW	VP15TF	TF15	Chipbreaker	DMIN	CW	WF2	RER/L	DCONMS	LF	LU	CDX	WF	H	ECA	ECD
	MS7025	MS9025															
CG0305RS-10			●	★	without	3	1	1.0	0.05	3	50	5	6	1.3	2.7	15°	0.3
CG0305RS-10B	●	●	★	★	with	3	1	1.0	0.05	3	50	5	6	1.3	2.7	15°	0.3
CG0306RS-20			★	★	without	3	2	1.0	0.1	3	50	6	6	1.3	2.7	15°	0.3
CG0306RS-20B	●	●	★	★	with	3	2	1.0	0.1	3	50	6	6	1.3	2.7	15°	0.3
CG03RS-10			●	★	without	3	1	1.0	0.05	3	50	10	6	1.3	2.7	15°	0.3
CG03RS-10B	●	●	★	★	with	3	1	1.0	0.05	3	50	10	6	1.3	2.7	15°	0.3
CG03RS-20			★	★	without	3	2	1.0	0.1	3	50	11	6	1.3	2.7	15°	0.3
CG03RS-20B	●	●	★	★	with	3	2	1.0	0.1	3	50	11	6	1.3	2.7	15°	0.3
CG0407RS-10			★	★	without	4	1	1.5	0.05	4	60	7	7	1.8	3.6	15°	0.5
CG0407RS-10B	●	●	★	★	with	4	1	1.5	0.05	4	60	7	7	1.8	3.6	15°	0.5
CG0408RS-20			★	★	without	4	2	1.5	0.1	4	60	8	7	1.8	3.6	15°	0.5
CG0408RS-20B	●	●	★	★	with	4	2	1.5	0.1	4	60	8	7	1.8	3.6	15°	0.5
CG04RS-10			●	★	without	4	1	1.5	0.05	4	60	15	7	1.8	3.6	15°	0.5
CG04RS-10B	●	●	★	★	with	4	1	1.5	0.05	4	60	15	7	1.8	3.6	15°	0.5
CG04RS-20			★	★	without	4	2	1.5	0.1	4	60	16	7	1.8	3.6	15°	0.5
CG04RS-20B	●	●	●	★	with	4	2	1.5	0.1	4	60	16	7	1.8	3.6	15°	0.5
CG0510RS-10			●	★	without	5	1	2.0	0.05	5	70	10	8	2.3	4.5	15°	0.7
CG0510RS-10B	●	●	●	★	with	5	1	2.0	0.05	5	70	10	8	2.3	4.5	15°	0.7
CG0511RS-20			●	★	without	5	2	2.0	0.1	5	70	11	8	2.3	4.5	15°	0.7
CG0511RS-20B	●	●	★	★	with	5	2	2.0	0.1	5	70	11	8	2.3	4.5	15°	0.7
CG05RS-10			●	★	without	5	1	2.0	0.05	5	70	20	8	2.3	4.5	15°	0.7
CG05RS-10B	●	●	★	★	with	5	1	2.0	0.05	5	70	20	8	2.3	4.5	15°	0.7
CG05RS-20			★	●	without	5	2	2.0	0.1	5	70	21	8	2.3	4.5	15°	0.7
CG05RS-20B	●	●	●	★	with	5	2	2.0	0.1	5	70	21	8	2.3	4.5	15°	0.7
CG0610RS-10			●	★	without	6	1	2.0	0.05	6	75	10	8	2.8	5.4	15°	0.7
CG0610RS-10B	●	●	●	★	with	6	1	2.0	0.05	6	75	10	8	2.8	5.4	15°	0.7
CG0611RS-20			●	★	without	6	2	2.0	0.1	6	75	11	8	2.8	5.4	15°	0.7
CG0611RS-20B	●	●	●	★	with	6	2	2.0	0.1	6	75	11	8	2.8	5.4	15°	0.7
CG06RS-10			●	★	without	6	1	2.0	0.05	6	75	20	8	2.8	5.4	15°	0.7
CG06RS-10B	●	●	●	●	with	6	1	2.0	0.05	6	75	20	8	2.8	5.4	15°	0.7
CG06RS-20			●	★	without	6	2	2.0	0.1	6	75	21	8	2.8	5.4	15°	0.7
CG06RS-20B	●	●	●	●	with	6	2	2.0	0.1	6	75	21	8	2.8	5.4	15°	0.7
CG0712RS-10			●	★	without	7	1	2.0	0.05	7	85	12	8	3.3	6.4	15°	0.7
CG0712RS-10B	●	●	●	★	with	7	1	2.0	0.05	7	85	12	8	3.3	6.4	15°	0.7
CG0713RS-20			★	★	without	7	2	2.0	0.1	7	85	13	8	3.3	6.4	15°	0.7
CG0713RS-20B	●	●	★	★	with	7	2	2.0	0.1	7	85	13	8	3.3	6.4	15°	0.7
CG07RS-10			★	★	without	7	1	2.0	0.05	7	85	25	8	3.3	6.4	15°	0.7
CG07RS-10B	●	●	●	★	with	7	1	2.0	0.05	7	85	25	8	3.3	6.4	15°	0.7
CG07RS-20			●	★	without	7	2	2.0	0.1	7	85	26	8	3.3	6.4	15°	0.7
CG07RS-20B	●	●	●	●	with	7	2	2.0	0.1	7	85	26	8	3.3	6.4	15°	0.7

1/1

- The maximum groove depth is WF2 dimension - 0.1 mm.
- [MICRO-MINI TWIN is available in 1 piece in one pack.]



● : Inventory maintained. ★ : Inventory maintained in Japan.

CG-TYPE

RECOMMENDED CUTTING CONDITIONS

Material	Properties	Grade	Vc	f		Recommended tool overhang (mm)
				03RS/04RS	05RS/06RS/07RS	
P Pure iron, Free cutting steel	—	MS7025	80 (40 – 120)	0.02 (0.01 – 0.03)	0.03 (0.01 – 0.05)	LU + 2 mm
P Carbon steel, alloy steel	Hardness 180–350HB	MS7025, VP15TF	80 (40 – 120)	0.02 (0.01 – 0.03)	0.03 (0.01 – 0.05)	LU + 2 mm
M Stainless steel	Hardness ≤200HB	MS7025, MS9025, VP15TF	80 (40 – 120)	0.02 (0.01 – 0.03)	0.03 (0.01 – 0.05)	LU + 2 mm
K Gray cast iron	Tensile strength ≤350MPa	VP15TF	80 (40 – 120)	0.03 (0.01 – 0.05)	0.03 (0.01 – 0.05)	LU + 2 mm
N Non-ferrous metal	—	TF15	120 (80 – 160)	0.03 (0.01 – 0.05)	0.05 (0.01 – 0.08)	LU + 2 mm
S Heat resistant alloy	—	MS9025	60 (40 – 80)	0.02 (0.01 – 0.03)	0.02 (0.01 – 0.03)	LU + 2 mm

1/1

1. Recommend wet machining.

PRECAUTIONS WHEN USING THE MICRO-MINI TWIN

When using a holder for general purpose / small automatic lathe:




- ❑ To avoid chipping of the 2nd cutting edge take care when inserting the boring bar into the holder. Refer to fig.1. If the 2nd edge contacts the internal face of the holder there is a possibility that it may chip.
- ❑ When using this type of holder, there is a possibility that damage to the shank and the 2nd cutting edge can occur. Make sure that the clamping screws are tightened to the set torque value. Additionally make sure that there is no clamping screw near the 2nd cutting edge as this can break the boring bar.

When using Mitsubishi Materials holders:

When using holders with a tool overhang of recommended quantity, ensure that the 3rd clamping screw is removed prior to machining. The set torque value for clamping screw is 2.0 Nm.

When using a square type holder:


- ❑ When installing the boring bar into the holder, tighten the clamp screws after ensuring the flats on the tool holder are parallel to the reference flats on the micro-mini bar. Refer to fig.3.
- ❑ Make sure that the clamping screws are tightened to the recommended values.
- ❑ Do not tighten the clamp screw without a bar in place, otherwise the bridge will be deformed.

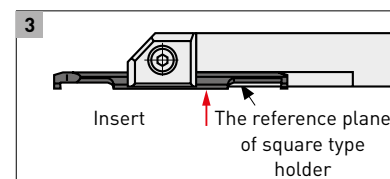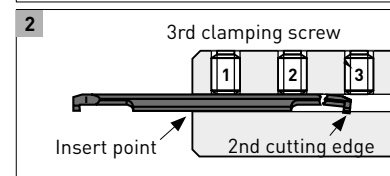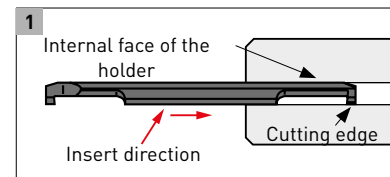

Tighten the clamping screw ensuring making the micro-mini twin boring bars in contact with the reference plane of square type holder.

CT-TYPE

MICRO-MINI TWIN

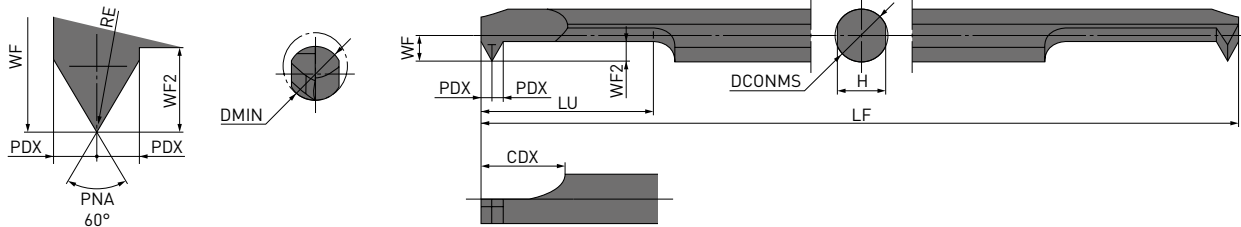

Order number	NEW MS7025	NEW MS9025	VPI5TF	TF15	Chipbreaker	DMIN	RE	DCONMS	LF	LU	CDX	WF	PDX	WF2	H
CT0305RS-M4			★	★	without	3.0	0.03	3.0	50	5.2	6.0	1.3	0.6	1.2	2.7
CT03RS-M4			●	●	without	3.0	0.03	3.0	50	10.2	6.0	1.3	0.6	1.2	2.7
CT03RS-M4B	●	●	●	●	with	3.0	0.03	3.0	50	10.2	6.0	1.3	0.6	1.2	2.7
NEW CT035RS-M5B	●	●			with	4.0	0.03	3.5	60	10.4	6.5	1.55	0.7	1.45	3.15
CT0407RS-M6			★	★	without	4.5	0.05	4.0	60	7.6	7.0	1.8	0.8	1.7	3.6
CT04RS-M6			●	●	without	4.5	0.05	4.0	60	15.6	7.0	1.8	0.8	1.7	3.6
CT04RS-M6B	●	●	●	●	with	4.5	0.05	4.0	60	15.6	7.0	1.8	0.8	1.7	3.6
NEW CT045RS-M7B	●	●			with	5.0	0.05	4.5	70	15.8	7.5	2.05	0.9	1.95	4.05
CT0511RS-M8			★	★	without	6.0	0.05	5.0	70	11	8.0	2.3	1.0	2.2	4.5
CT05RS-M8			●	●	without	6.0	0.05	5.0	70	21	8.0	2.3	1.0	2.2	4.5
CT05RS-M8B	●	●	●	●	with	6.0	0.05	5.0	70	21	8.0	2.3	1.0	2.2	4.5
CT0611RS-M10			★	★	without	7.0	0.05	6.0	75	11	8.0	2.8	1.0	2.2	5.4
CT06RS-M10			●	●	without	7.0	0.05	6.0	75	21	8.0	2.8	1.0	2.2	5.4
CT06RS-M10B	●	●	●	●	with	7.0	0.05	6.0	75	21	8.0	2.8	1.0	2.2	5.4

1/1

1. (MICRO-MINI TWIN is available in 1 piece in one pack.)



STANDARDS FOR THREADING

Tool type	Threads			
	Metric screw		Unified coarse screw	
	Thread	Pitch (mm)	Thread	Pitch (thread/inch)
CT03	≥ M4	0.50 - 1.00	≥ No.8 - 32UNC ≥ No.8 - 36UNF	36 - 24
CT035	≥ M5	0.50 - 1.00	≥ No.10 - 24UNC ≥ No.10 - 32UNF	32 - 24
CT04	≥ M6	0.75 - 1.25	≥ 1/4 - 20UNC ≥ 1/4 - 28UNF	28 - 20
CT045	≥ M7	0.75 - 1.25	≥ 1/4 - 20UNC ≥ 1/4 - 28UNF	28 - 20
CT05	≥ M8	0.75 - 1.50	≥ 5/16 - 18UNC ≥ 5/16 - 24UNF	24 - 18
CT06	≥ M10	0.75 - 1.75	≥ 3/8 - 16UNC ≥ 3/8 - 24UNF	24 - 16

● : Inventory maintained. ★ : Inventory maintained in Japan.

CT-TYPE

RECOMMENDED CUTTING CONDITIONS

Material	Properties	Grade	Vc	Recommended tool overhang (mm)	
P	Pure iron, Free cutting steel	—	MS7025	50 (30 – 80)	LU + 2 mm
P	Carbon steel, alloy steel	Hardness 180–350HB	MS7025, VP15TF	50 (30 – 80)	LU + 2 mm
M	Stainless steel	Hardness ≤200HB	MS7025, MS9025, VP15TF	50 (30 – 80)	LU + 2 mm
K	Gray cast iron	Tensile strength ≤350MPa	VP15TF	50 (30 – 80)	LU + 2 mm
N	Non-ferrous metal	—	TF15	80 (50 – 100)	LU + 2 mm
S	Heat resistant alloy	—	MS9025	40 (30 – 60)	LU + 2 mm

1/1

1. Recommend wet machining.
2. Pay special attention to machining of small diameters at high revolutions as the feed rate cannot keep up with the speed.

STANDARD DEPTH OF CUT

The chart shows the cutting depths when machining external ISO metric screw threads.


METRIC

P (Pitch)	0.50	0.75	1.00	1.25	1.50	1.75
Total cutting depth	0.29	0.43	0.58	0.72	0.87	1.01
Number of passes	1	0.06	0.06	0.07	0.07	0.07
	2	0.05	0.06	0.06	0.07	0.07
	3	0.05	0.05	0.06	0.07	0.07
	4	0.04	0.05	0.05	0.07	0.07
	5	0.03	0.04	0.05	0.06	0.06
	6	0.03	0.04	0.05	0.06	0.06
	7	0.02	0.04	0.04	0.05	0.06
	8	0.01	0.03	0.04	0.05	0.06
	9	—	0.03	0.04	0.05	0.05
	10	—	0.02	0.03	0.04	0.05
	11	—	0.01	0.03	0.04	0.05
	12	—	—	0.03	0.03	0.04
	13	—	—	0.02	0.03	0.04
	14	—	—	0.01	0.02	0.03
	15	—	—	—	0.01	0.03
	16	—	—	—	—	0.03
	17	—	—	—	—	0.02
	18	—	—	—	—	0.01
	19	—	—	—	—	—
	20	—	—	—	—	—
	21	—	—	—	—	—

MICRO-MINI BORING BARS

STANDARD MICRO-MINI BORING BARS (SOLID CARBIDE BORING BAR)

- Solid carbide type with minimum cutting diameter \varnothing 3.2 mm.
- l/d is 5 times the diameter.
- Cutting edge can be shaped according to the application thus, it covers a wide application range (threading, grooving, copying, etc).

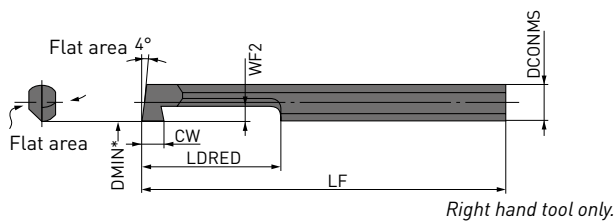

Order number	TF15	CW	DCONMS	LF	LDRED	DMIN	WF2
C03FR-BLS	★	2.0	3	80	15	3.2	1.0
C04FR-BLS	★	2.5	4	80	20	4.2	1.5
C05HR-BLS	★	3.0	5	100	25	5.2	2.0

1/1

* DMIN : Min. cutting diameter

1. (MICRO-MINI TWIN is available in 1 piece in one pack.)



MICRO-MINI BORING BARS

RECOMMENDED CUTTING CONDITIONS

Material	Properties	Vc	f	ap	l/d	Edge condition (mm)		
						*Corner radius or BCH	*Honing	
P	Carbon steel, alloy steel	Hardness 180–350HB	40 (30 – 50)	0.05 (– 0.1)	0.2 (0.1 – 0.3)	5	0.1 – 0.5	0.01 – 0.05
M	Stainless steel	Hardness ≤200HB	40 (30 – 50)	0.05 (– 0.1)	0.2 (0.1 – 0.3)	5	<0.4	<0.03 (Honing not required)
K	Gray cast iron	Tensile strength ≤350MPa	40 (30 – 50)	0.05 (– 0.05)	0.2 (0.1 – 0.3)	5	0.1 – 0.5	0.01 – 0.05
N	Non-ferrous metal	—	80 (60 – 100)	0.05 (– 0.1)	0.3 (0.1 – 0.5)	5	0.1 – 0.5	<0.03 (Honing not required)

1/1

* Cutting edge is not honed. Please hone according to the workpiece before machining.



GRINDING THE CUTTING EDGE OF MICRO-MINI BORING BAR

- MICRO-MINI boring bars can be used for boring and grooving without any modifications. It can also be reground as shown below.
- For shaping and regrinding, use a diamond whetstone approximately #250 – #400.
- Please grind according to the application using the figure below as a reference.



APPLICATION

GRINDING EXAMPLES



BORING

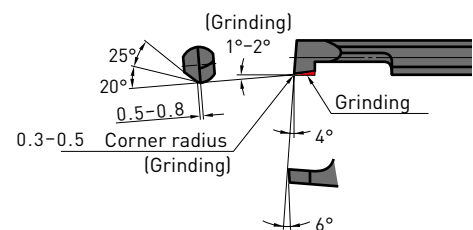


GROOVING

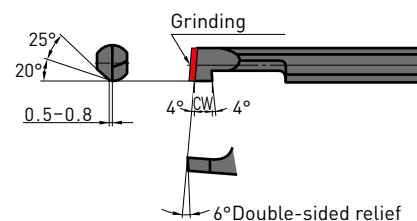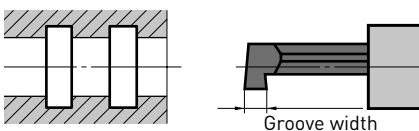

THREADING

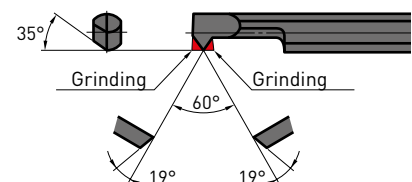

ROUND TYPE HOLDER

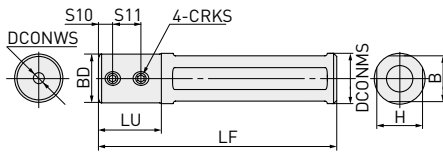

Order number	Stock	DCONWS	DCONWS	BD	LF	LU	H	B	S10	S11
SLV190085025N	●	19.05	2.5	18.5	85	20	17.8	17.8	4.5	9
SLV190085035N	●	19.05	3.5	18.5	85	20	17.8	17.8	4.5	9
SLV190085045N	●	19.05	4.5	18.5	85	20	17.8	17.8	4.5	9
SLV190110025N	●	19.05	2.5	18.5	110	20	17.8	17.8	4.5	9
SLV190110035N	●	19.05	3.5	18.5	110	20	17.8	17.8	4.5	9
SLV190110045N	●	19.05	4.5	18.5	110	20	17.8	17.8	4.5	9
SLV200085025N	●	20.0	2.5	19.0	85	20	18.8	18.8	4.5	9
SLV200085035N	●	20.0	3.5	19.0	85	20	18.8	18.8	4.5	9
SLV200085045N	●	20.0	4.5	19.0	85	20	18.8	18.8	4.5	9
SLV220135025N	●	22.0	2.5	20.0	135	20	20.8	20.8	4.5	9
SLV220135035N	●	22.0	3.5	20.0	135	20	20.8	20.8	4.5	9
SLV220135045N	●	22.0	4.5	20.0	135	20	20.8	20.8	4.5	9
SLV250067025N	●	25.0	2.5	20.0	67	20	23.9	23.9	4.5	9
SLV250067035N	●	25.0	3.5	20.0	67	20	23.9	23.9	4.5	9
SLV250067045N	●	25.0	4.5	20.0	67	20	23.9	23.9	4.5	9
SLV250110025N	●	25.0	2.5	20.0	110	20	23.9	23.9	4.5	9
SLV250110035N	●	25.0	3.5	20.0	110	20	23.9	23.9	4.5	9
SLV250110045N	●	25.0	4.5	20.0	110	20	23.9	23.9	4.5	9
SLV254085025N	●	25.4	2.5	20.0	85	20	24.4	24.4	4.5	9
SLV254085035N	●	25.4	3.5	20.0	85	20	24.4	24.4	4.5	9
SLV254085045N	●	25.4	4.5	20.0	85	20	24.4	24.4	4.5	9
SLV254110025N	●	25.4	2.5	20.0	110	20	24.4	24.4	4.5	9
SLV254110035N	●	25.4	3.5	20.0	110	20	24.4	24.4	4.5	9
SLV254110045N	●	25.4	4.5	20.0	110	20	24.4	24.4	4.5	9

ROUND TYPE HOLDER


MOUNTING CHART

Series			Boring bar type	Holder type
MICRO-MINI TWIN	Boring	CB	025RS(-B)	SLV●●●●●●●●025N
MICRO-MINI TWIN	Boring	CB	035RS(-B)	SLV●●●●●●●●035N
MICRO-MINI TWIN	Boring	CB	045RS(-B)	SLV●●●●●●●●045N
MICRO-MINI TWIN	Boring	CR	035RS(-B)	SLV●●●●●●●●035N
MICRO-MINI TWIN	Boring	CR	045RS(-B)	SLV●●●●●●●●045N
MICRO-MINI TWIN	Threading	CT	035RS(-B)	SLV●●●●●●●●035N
MICRO-MINI TWIN	Threading	CT	045RS(-B)	SLV●●●●●●●●045N

SPARE PARTS

Holder type	Clamp screw	Wrench	Clamp torque (Nm)
SLV●●●●●●●●025N	HSS04005	HKY20R	2.0
SLV●●●●●●●●035N	HSS04005	HKY20R	2.0
SLV●●●●●●●●045N	HSS04005	HKY20R	2.0

ROUND TYPE HOLDER

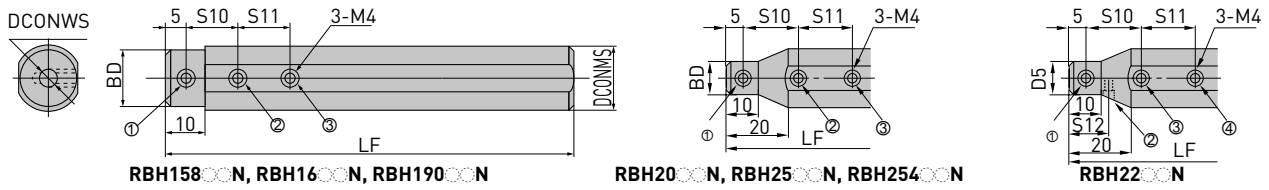

Order number	Stock	DCONMS	DCONWS	BD	LF	S10	S11	S12
RBH15820N	★	15.875	2	15	100	10	—	—
RBH15830N	★	15.875	3	15	100	10	10	—
RBH15840N	★	15.875	4	15	100	15	15	—
RBH15850N	★	15.875	5	15	100	15	15	—
RBH15860N	★	15.875	6	15	100	15	15	—
RBH15870N	★	15.875	7	15	100	20	20	—
RBH15880N	★	15.875	8	15	100	20	20	—
RBH1620N	●	16	2	15	100	10	—	—
RBH1630N	●	16	3	15	100	10	10	—
RBH1640N	●	16	4	15	100	15	15	—
RBH1650N	●	16	5	15	100	15	15	—
RBH1660N	●	16	6	15	100	15	15	—
RBH1670N	●	16	7	15	100	20	20	—
RBH1680N	★	16	8	15	100	20	20	—
RBH19020N	★	19.05	2	18	125	10	—	—
RBH19030N	★	19.05	3	18	125	10	10	—
RBH19040N	★	19.05	4	18	125	15	15	—
RBH19050N	★	19.05	5	18	125	15	15	—
RBH19060N	★	19.05	6	18	125	15	15	—
RBH19070N	★	19.05	7	18	125	20	20	—
RBH19080N	★	19.05	8	18	125	20	20	—
RBH2020N	★	20	2	11	125	10	—	—
RBH2030N	★	20	3	12	125	10	10	—
RBH2040N	★	20	4	13	125	15	15	—
RBH2050N	★	20	5	14	125	15	15	—
RBH2060N	★	20	6	15	125	15	15	—
RBH2070N	★	20	7	16	125	20	20	—
RBH2080N	★	20	8	17	125	20	20	—
RBH2220N	★	22	2	11	125	10	—	10
RBH2230N	★	22	3	12	125	10	10	10
RBH2240N	★	22	4	13	125	15	15	12.5
RBH2250N	★	22	5	14	125	15	15	12.5
RBH2260N	★	22	6	15	125	15	15	15
RBH2270N	★	22	7	16	125	20	20	15
RBH2280N	★	22	8	17	125	20	20	15
RBH2520N	★	25	2	11	150	10	—	—
RBH2530N	★	25	3	12	150	10	10	—
RBH2540N	★	25	4	13	150	15	15	—
RBH2550N	★	25	5	14	150	15	15	—
RBH2560N	★	25	6	15	150	15	15	—
RBH2570N	★	25	7	16	150	20	20	—
RBH2580N	★	25	8	17	150	20	20	—
RBH25420N	★	25.4	2	11	150	10	—	—
RBH25430N	★	25.4	3	12	150	10	10	—
RBH25440N	★	25.4	4	13	150	15	15	—
RBH25450N	★	25.4	5	14	150	15	15	—
RBH25460N	★	25.4	6	15	150	15	15	—
RBH25470N	★	25.4	7	16	150	20	20	—
RBH25480N	★	25.4	8	17	150	20	20	—

ROUND TYPE HOLDER

MOUNTING CHART

Series		Boring bar type			Holder type	
MICRO-DEX	Boring	C	04GS○○○R○○	—	RBH○○40N	RBH○○○40N
MICRO-DEX	Boring	C	05HS○○○R○○	—	RBH○○50N	RBH○○○50N
MICRO-DEX	Boring	C	06JS○○○R○○	—	RBH○○60N	RBH○○○60N
MICRO-DEX	Boring	C	07KS○○○R○○	—	RBH○○70N	RBH○○○70N
MICRO-MINI TWIN	Boring	CB	02RS(-B)	02RS-0○(B)	RBH○○20N	RBH○○○20N
MICRO-MINI TWIN	Boring	CB	03RS(-B)	03RS-0○(B)	RBH○○30N	RBH○○○30N
MICRO-MINI TWIN	Boring	CB	04RS(-B)	04RS-0○(B)	RBH○○40N	RBH○○○40N
MICRO-MINI TWIN	Boring	CB	05RS(-B)	05RS-0○(B)	RBH○○50N	RBH○○○50N
MICRO-MINI TWIN	Boring	CB	06RS(-B)	06RS-0○(B)	RBH○○60N	RBH○○○60N
MICRO-MINI TWIN	Boring	CB	07RS(-B)	07RS-0○(B)	RBH○○70N	RBH○○○70N
MICRO-MINI TWIN	Boring	CB	08RS(-B)	08RS-0○(B)	RBH○○80N	RBH○○○80N
MICRO-MINI TWIN	Boring	CR	03RS-01(-B)	—	RBH○○30N	RBH○○○30N
MICRO-MINI TWIN	Boring	CR	04RS-01(-B)	—	RBH○○40N	RBH○○○40N
MICRO-MINI TWIN	Boring	CR	05RS-01(-B)	—	RBH○○50N	RBH○○○50N
MICRO-MINI TWIN	Grooving	CG	03RS-○○(B)	—	RBH○○30N	RBH○○○30N
MICRO-MINI TWIN	Grooving	CG	04RS-○○(B)	—	RBH○○40N	RBH○○○40N
MICRO-MINI TWIN	Grooving	CG	05RS-○○(B)	—	RBH○○50N	RBH○○○50N
MICRO-MINI TWIN	Grooving	CG	06RS-○○(B)	—	RBH○○60N	RBH○○○60N
MICRO-MINI TWIN	Grooving	CG	07RS-○○(B)	—	RBH○○70N	RBH○○○70N
MICRO-MINI TWIN	Threading	CT	0305RS-M4	03RS-M4(B)	RBH○○30N	RBH○○○30N
MICRO-MINI TWIN	Threading	CT	0407RS-M6	04RS-M6(B)	RBH○○40N	RBH○○○40N
MICRO-MINI TWIN	Threading	CT	0511RS-M8	05RS-M8(B)	RBH○○50N	RBH○○○50N
MICRO-MINI TWIN	Threading	CT	0611RS-M10	06RS-M10(B)	RBH○○60N	RBH○○○60N
MICRO-MINI	General purpose	C	03FR-BLS	—	RBH○○30N	RBH○○○30N
MICRO-MINI	General purpose	C	04FR-BLS	—	RBH○○40N	RBH○○○40N
MICRO-MINI	General purpose	C	05FR-BLS	—	RBH○○50N	RBH○○○50N

ROUND TYPE HOLDER


SPARE PARTS

Holder type	Clamp screw ①	Clamp screw ②	Clamp screw ③	Clamp screw ④	Wrench	Clamp torque (Nm)
RBH15820N	HSS04006	HSS04006	—	—	HKY20F	2.0
RBH158 [○] ○N	HSS04004	HSS04004	HSS04004	—	HKY20F	2.0
RBH15880N	HSS04003	HSS04003	HSS04003	—	HKY20F	2.0
RBH1620N	HSS04006	HSS04006	—	—	HKY20F	2.0
RBH16 [○] ○N	HSS04004	HSS04004	HSS04004	—	HKY20F	2.0
RBH1680N	HSS04003	HSS04003	HSS04003	—	HKY20F	2.0
RBH19020N	HSS04008	HSS04008	—	—	HKY20F	2.0
RBH190 [○] ○N	HSS04006	HSS04006	HSS04006	—	HKY20F	2.0
RBH19080N	HSS04004	HSS04004	HSS04004	—	HKY20F	2.0
RBH2020N	HSS04004	HSS04004	—	—	HKY20F	2.0
RBH2030N	HSS04004	HSS04004	HSS04006	—	HKY20F	2.0
RBH20 [○] ○N	HSS04004	HSS04006	HSS04006	—	HKY20F	2.0
RBH2080N	HSS04004	HSS04004	HSS04004	—	HKY20F	2.0
RBH2220N	HSS04004	HSS04006	—	HSS04004	HKY20F	2.0
RBH2230N	HSS04004	HSS04006	HSS04008	HSS04004	HKY20F	2.0
RBH22 [○] ○N	HSS04004	HSS04006	HSS04006	HSS04004	HKY20F	2.0
RBH2520N	HSS04004	HSS04006	—	—	HKY20F	2.0
RBH2530N	HSS04004	HSS04006	HSS04008	—	HKY20F	2.0
RBH25 [○] N	HSS04004	HSS04008	HSS04008	—	HKY20F	2.0
RBH2580N	HSS04004	HSS04006	HSS04006	—	HKY20F	2.0
RBH25420N	HSS04004	HSS04006	—	—	HKY20F	2.0
RBH25430N	HSS04004	HSS04006	HSS04008	—	HKY20F	2.0
RBH254 [○] N	HSS04004	HSS04008	HSS04008	—	HKY20F	2.0
RBH25480N	HSS04004	HSS04006	HSS04006	—	HKY20F	2.0


SQUARE TYPE HOLDER

MICRO-MINI TWIN


CB type (Boring bar fits to a holder)

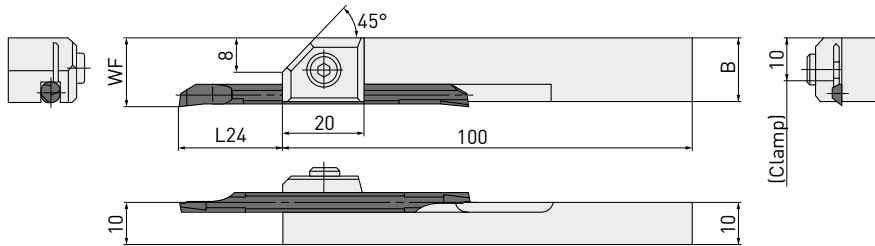


CR type (Boring bar fits to a holder)



CG type (Boring bar fits to a holder)

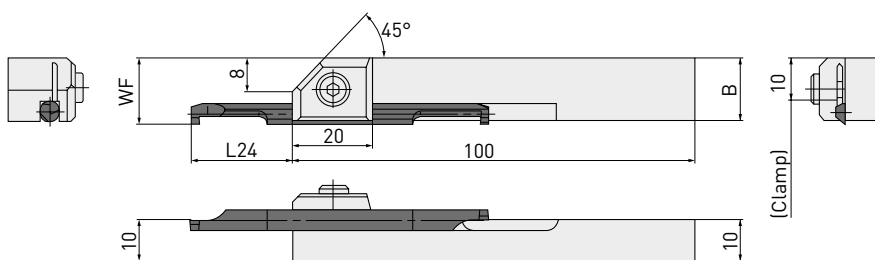

CT type (Boring bar fits to a holder)

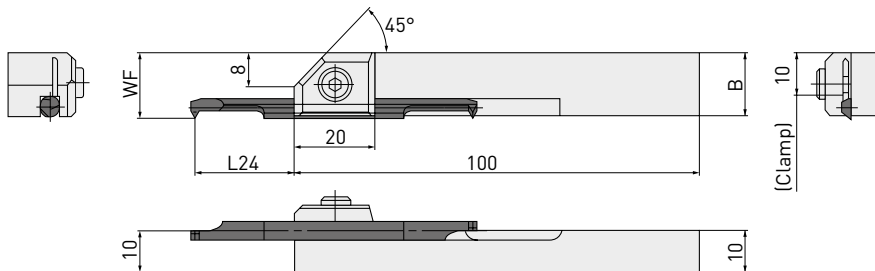

Order number	Stock	WF				B
		CB	CR	CG	CT	
SBH1020R	★	13	—	—	—	12.9
SBH1030R	★	14	12.65	13.8	13.8	13.8
SBH1040R	★	15	13.15	14.8	14.8	14.7
SBH1050R	★	16	13.65	15.8	15.8	15.6
SBH1060R	★	17	—	16.8	16.8	16.5
SBH1070R	★	18	—	17.8	—	17.4

TOOL OVERHANG LENGTH FOR SUFFICIENT CLAMPING

Machining method	MICRO-MINI TWIN type			Holder type	Tool overhang L24		Recommended for steel
					Min.	Max.	Tool overhang
Boring	CB	02RS(B)	02RS-0(B)	SBH1020R	6	24	6 – 10
Boring	CB	03RS(B)	03RS-0(B)	SBH1030R	8.5	22	9 – 15
Boring	CB	04RS(B)	04RS-0(B)	SBH1040R	11	29.5	12 – 20
Boring	CB	05RS(B)	05RS-0(B)	SBH1050R	13.5	37	15 – 25
Boring	CB	06RS(B)	06RS-0(B)	SBH1060R	13.5	42	18 – 30
Boring	CB	07RS(B)	07RS-0(B)	SBH1070R	13.5	52	21 – 35
Boring	CR	03RS-01(B)	—	SBH1030R	11	19.5	12
Boring	CR	04RS-01(B)	—	SBH1040R	13	27.5	14
Boring	CR	05RS-01(B)	—	SBH1050R	15	35.5	16
Groove Width 1mm	CG	03RS-10(B)	—	SBH1030R	13	17.5	14
Groove Width 2mm	CG	03RS-20(B)	—	SBH1030R	14	16.5	15
Groove Width 1mm	CG	04RS-10(B)	—	SBH1040R	18	22.5	19
Groove Width 2mm	CG	04RS-20(B)	—	SBH1040R	19	21.5	20
Groove Width 1mm	CG	05RS-10(B)	—	SBH1050R	23	27.5	24
Groove Width 2mm	CG	05RS-20(B)	—	SBH1050R	24	26.5	25
Groove Width 1mm	CG	06RS-10(B)	—	SBH1060R	23	32.5	24
Groove Width 2mm	CG	06RS-20(B)	—	SBH1060R	24	31.5	25
Groove Width 1mm	CG	07RS-10(B)	—	SBH1070R	28	38	29
Groove Width 2mm	CG	07RS-20(B)	—	SBH1070R	29	37	30
Threading	CT	0305RS-M4	03RS-M4(B)	SBH1030R	13	17.5	14
Threading	CT	0407RS-M6	04RS-M6(B)	SBH1040R	18.5	22	19.5
Threading	CT	0511RS-M8	05RS-M8(B)	SBH1050R	24	26.5	25
Threading	CT	0611RS-M10	06RS-M10(B)	SBH1060R	24	31.5	25

SPARE PARTS

Holder type	Clamp screw	Wrench	Clamp torque
SBH1020R	HSC04010	HKY30R	4.8
SBH1030R	HSC05012	HKY40R	9.5
SBH1040R	HSC05012	HKY40R	9.5
SBH1050R	HSC05012	HKY40R	9.5
SBH1060R	HSC05012	HKY40R	9.5
SBH1070R	HSC05012	HKY40R	9.5

EUROPEAN SALES COMPANIES

GERMANY

MMC HARTMETALL GMBH
Comeniusstr. 2 . 40670 Meerbusch
Phone +49 2159 91890 . Fax +49 2159 918966
Email admin@mmchg.de

U.K.

MMC HARDMETAL U.K. LTD.
Mitsubishi House . Galena Close . Tamworth . Staffs. B77 4AS
Phone +44 1827 312312
Email sales@mitsubishicarbide.co.uk

SPAIN

MITSUBISHI MATERIALS ESPAÑA, S.A.
Calle Emperador 2 . 46136 Museros/Valencia
Phone +34 96 1441711
Email comercial@mmevalencia.es

FRANCE

MMC METAL FRANCE S.A.R.L.
6, Rue Jacques Monod . 91400 Orsay
Phone +33 1 69 35 53 53 . Fax +33 1 69 35 53 50
Email mmfsales@mmc-metal-france.fr

POLAND

MMC HARDMETAL POLAND SP. Z O.O
Al. Armii Krajowej 61 . 50-541 Wrocław
Phone +48 71335 1620 . Fax +48 71335 1621
Email sales@mitsubishicarbide.com.pl

ITALY

MMC ITALIA S.R.L.
Viale Certosa 144 . 20156 Milano
Phone +39 0293 77031 . Fax +39 0293 589093
Email info@mmc-italia.it

TURKEY

MMC HARTMETALL GMBH ALMANYA - İZMİR MERKEZ ŞUBESİ
Adalet Mahallesi Anadolu Caddesi No: 41-1 . 15001 35530 Bayraklı /İzmir
Phone +90 232 5015000 . Fax +90 232 5015007
Email info@mmchg.com.tr

www.mmc-carbide.com

DISTRIBUTED BY:

□

□

└

└

B042E-G 

Published by: MMC Hartmetall GmbH – A Sales Company of  MITSUBISHI MATERIALS | 2024.10 (2)