

THE NEW GENERATION END MILLS FOR HIGH EFFICIENCY MACHINING

**Ideal for milling of stainless steels, titanium alloys
and heat resistant materials.**



IMPACT MIRACLE

IMPACT MIRACLE vibration control end mill series


VFMHV ^{Expansion} **VF6MHV** **VFHVRB** ^{NEW}
VFJHV ^{NEW} **VF6MHVRB** **VF2MV**
VFMHVRB ^{Expansion} **VF45VB** ^{NEW} **VF4MV**

Features

- Vibration control geometry for stable machining and a smooth cutting action.
- Impact Miracle coating with superior heat resistance gives excellent performance when machining hardened materials.
- In comparison with conventional end mills, the use of irregular helix flutes assists in preventing vibrations.
- Delivers superior vibration resistance for difficult-to-cut materials and applications with a long overhang.
- VFMHV type with undercut long shank type uses a curved cutting edge at the top of the flute to reduce step differences in vertical wall surfaces.


Irregular helix flutes

No vibration!

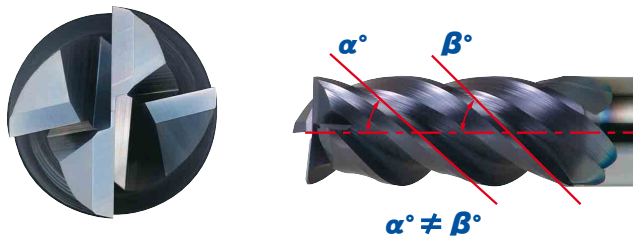


Special flute geometry

Improved chip disposal

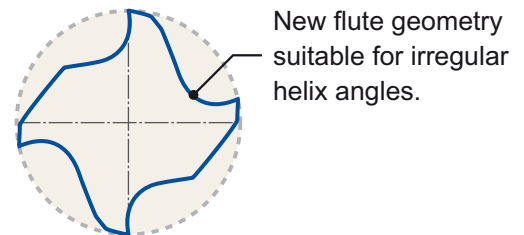

New flute geometry suitable for irregular helix angles.


“Variable curve” radius cutting edges for difficult-to-cut materials.

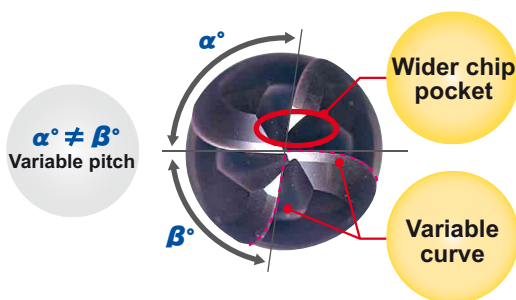

Application Range

Hardened Steel			
General Materials			VF2MV VF4MV Vibration control type
Stainless Ti alloys	VFMHV Vibration control type	VC2MS VE4MC	

Curved top flute edge

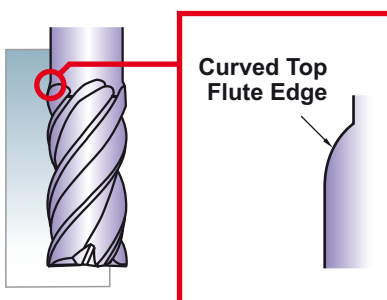

A curved edge at the shank side of the flute is used on the undercut shank type VFMHV end mills.

This allows deep faces to be finished in steps and minimises the blend mark between steps when compared to conventional sharp cornered end mills.

Vibration control end mill series with irregular helix flutes

- New generation for high feed and depth of cut - for Steel, Stainless steel and Ti-Alloy:

VFHVRB NEW

4 flute, Corner radius, Short cut length

16 different sizes available

Ø1×R0.2-Ø16×R3




- Sharp cutting edge type - for Steel, Stainless steel and Ti-Alloy:

VFMHV Expansion

End mill, Medium cut length, 4 flute

24 different sizes available

Ø2 - Ø20mm



VFJHV NEW

End mill, Semi long cut length, 4 flutes

10 different sizes available

Ø2 - Ø20mm



VFMHVRB Expansion

Corner radius end mill, Medium cut length, 4 flute

16 different sizes available

Ø6×R0.5 - Ø20×R4



VF6MHV

End mill, Medium cut length, 6 flute

6 different sizes available

Ø6 - Ø20mm



VF6MHVRB

Corner radius end mill, Medium cut length, 6 flute

12 different sizes available

Ø6×R0.5 - Ø20×R2




VF4SVB NEW

Ball nose, Short cut length, 4 flute

6 different sizes available

Ø6×R3 - Ø20×R10



- Strong cutting edge type for hard materials:

VF2MV

2 flute, Medium cut length

9 different sizes available

Ø0.5 - Ø6mm



VF4MV

4 flute, Medium cut length

6 different sizes available

Ø6 - Ø20mm



IMPACT MIRACLE END MILLS

VFHVRB NEW

4 flute, Corner radius, Short cut length, Irregular helix flutes



D1 ≤ 10 ±0.007
D1 > 10 ±0.01



D1 ≤ 12 0 - -0.02
D1 > 12 0 - -0.03





D4 = 6 0 - -0.008
8 ≤ D4 ≤ 10 0 - -0.009
12 ≤ D4 ≤ 16 0 - -0.011

Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-Hardened Steel, Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
++	++	++	++	+	+		



Effective length for inclined angle

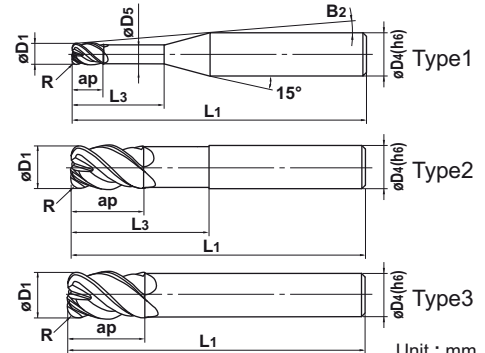

● Impact Miracle radius end mill for high feed and efficient machining.

Order Number	Dia. D1	Corner R R	Length of Cut ap	Neck Length L3	Neck Dia. D5	Cutting Edge to Shank Angle B2	Overall Length L1	Shank Dia. D4	No. of Flutes N	Stock	Type	Effective length for inclined angle			
												30°	1°	2°	3°
VFHVRBD0100R02N004	1	0.2	1	4	0.94	10.6°	60	6	4	★	1	4.2	4.5	4.7	5.3
D0100R02N006	1	0.2	1	6	0.94	9.2°	60	6	4	★	1	6.4	6.7	7.2	7.7
D0100R02N008	1	0.2	1	8	0.94	8.2°	60	6	4	★	1	8.5	8.8	9.5	10.2
D0100R02N010	1	0.2	1	10	0.94	7.4°	60	6	4	★	1	10.5	11	11.8	12.7
D0100R02N015	1	0.2	1	15	0.94	5.9°	60	6	4	★	1	15.8	16.3	17.5	18.9
D0100R02N020	1	0.2	1	20	0.94	4.9°	80	6	4	★	1	20.9	21.7	23.3	25.1
D0150R03N004	1.5	0.3	1.5	4	1.44	10.3°	60	6	4	★	1	4.2	4.5	4.6	5.2
D0150R03N006	1.5	0.3	1.5	6	1.44	8.9°	60	6	4	★	1	6.3	6.6	7.2	7.7
D0150R03N010	1.5	0.3	1.5	10	1.44	7°	60	6	4	★	1	10.5	10.9	11.8	12.7
D0150R03N015	1.5	0.3	1.5	15	1.44	5.5°	60	6	4	★	1	15.7	16.3	17.5	18.9
D0150R03N020	1.5	0.3	1.5	20	1.44	4.6°	80	6	4	★	1	20.9	21.6	23.3	25.1
D0150R03N025	1.5	0.3	1.5	25	1.44	3.9°	80	6	4	★	1	26.1	27	29	31.3
D0150R03N030	1.5	0.3	1.5	30	1.44	3.4°	80	6	4	★	1	31.3	32.3	34.7	37.5
D0200R05N006	2	0.5	2	6	1.9	8.7°	60	6	4	●	1	6.3	6.5	7	7.5
D0200R05N010	2	0.5	2	10	1.9	6.7°	60	6	4	●	1	10.5	10.8	11.6	12.5
D0200R05N015	2	0.5	2	15	1.9	5.2°	60	6	4	★	1	15.6	16.2	17.4	18.7
D0200R05N020	2	0.5	2	20	1.9	4.3°	80	6	4	★	1	20.8	21.5	23.1	24.9
D0200R05N025	2	0.5	2	25	1.9	3.6°	80	6	4	★	1	26	26.9	28.9	31.2
D0200R05N030	2	0.5	2	30	1.9	3.1°	80	6	4	★	1	31.2	32.2	34.6	37.4
D0200R05N035	2	0.5	2	35	1.9	2.8°	90	6	4	★	1	36.3	37.6	40.4	*
D0200R05N040	2	0.5	2	40	1.9	2.5°	90	6	4	★	1	41.5	42.9	46.1	*
D0300R05N010	3	0.5	3	10	2.9	5.6°	60	6	4	●	1	10.5	10.8	11.6	12.5
D0300R05N015	3	0.5	3	15	2.9	4.3°	60	6	4	●	1	15.6	16.2	17.4	18.7
D0300R05N020	3	0.5	3	20	2.9	3.4°	80	6	4	★	1	20.8	21.5	23.1	24.9
D0300R05N030	3	0.5	3	30	2.9	2.5°	80	6	4	★	1	31.2	32.2	34.6	*
D0300R08N010	3	0.8	3	10	2.9	5.7°	60	6	4	●	1	10.4	10.8	11.6	12.4
D0300R08N015	3	0.8	3	15	2.9	4.3°	60	6	4	●	1	15.6	16.2	17.3	18.7
D0300R08N020	3	0.8	3	20	2.9	3.5°	80	6	4	★	1	20.8	21.5	23.1	24.9
D0300R08N030	3	0.8	3	30	2.9	2.5°	80	6	4	★	1	31.1	32.2	34.6	*
D0300R08N040	3	0.8	3	40	2.9	2°	90	6	4	★	1	41.5	42.9	*	*
D0300R08N050	3	0.8	3	50	2.9	1.6°	90	6	4	★	1	51.8	53.6	*	*
D0400R05N012	4	0.5	4	12	3.9	3.8°	60	6	4	●	1	12.5	13	13.9	15
D0400R05N020	4	0.5	4	20	3.9	2.5°	80	6	4	●	1	20.8	21.5	23.1	*
D0400R05N030	4	0.5	4	30	3.9	1.8°	80	6	4	★	1	31.2	32.2	*	*
D0400R05N048	4	0.5	4	48	3.9	1.2°	90	6	4	★	1	49.8	51.5	*	*
D0400R10N012	4	1	4	12	3.9	3.9°	60	6	4	●	1	12.5	12.9	13.8	14.9

* : No interference

● : Inventory maintained. ★ : Inventory maintained in Japan.



D1 ≤ 10 ±0.007
D1 > 10 ±0.01



D1 ≤ 12 0 - -0.02
D1 > 12 0 - -0.03



D4 = 6 0 - -0.008
8 ≤ D4 ≤ 10 0 - -0.009
12 ≤ D4 ≤ 16 0 - -0.011

Unit : mm

Order Number	Dia. D1	Corner Radius R	Length of Cut ap	Neck Length L3	Neck Dia. D5	Cutting Edge to Shank Angle B2	Overall Length L1	Shank Dia. D4	No. of Flutes N	Stock	Type	Effective length for inclined angle			
												30°	1°	2°	3°
VFHVRBD0400R10N020	4	1	4	20	3.9	2.5°	80	6	4	●	1	20.8	21.5	23	*
D0400R10N030	4	1	4	30	3.9	1.8°	80	6	4	★	1	31.1	32.2	*	*
D0600R05N018	6	0.5	9	18	5.85	—	60	6	4	●	2	*	*	*	*
D0600R05N030	6	0.5	9	30	5.85	—	80	6	4	●	2	*	*	*	*
D0600R10N018	6	1	9	18	5.85	—	60	6	4	●	2	*	*	*	*
D0600R10N030	6	1	9	30	5.85	—	80	6	4	●	2	*	*	*	*
D0600R10N054	6	1	9	54	5.85	—	90	6	4	★	2	*	*	*	*
D0600R15N018	6	1.5	9	18	5.85	—	60	6	4	●	2	*	*	*	*
D0600R15N030	6	1.5	9	30	5.85	—	80	6	4	●	2	*	*	*	*
D0600R15N042	6	1.5	9	42	5.85	—	90	6	4	★	2	*	*	*	*
D0600R15N054	6	1.5	9	54	5.85	—	90	6	4	★	2	*	*	*	*
D0600R20N018	6	2	9	18	5.85	—	60	6	4	★	2	*	*	*	*
D0600R20N030	6	2	9	30	5.85	—	80	6	4	★	2	*	*	*	*
D0700R15	7	1.5	11	—	—	—	80	6	4	★	3	*	*	*	*
D0800R05N024	8	0.5	12	24	7.85	—	60	8	4	●	2	*	*	*	*
D0800R05N040	8	0.5	12	40	7.85	—	100	8	4	●	2	*	*	*	*
D0800R10N024	8	1	12	24	7.85	—	60	8	4	●	2	*	*	*	*
D0800R10N040	8	1	12	40	7.85	—	100	8	4	●	2	*	*	*	*
D0800R20N024	8	2	12	24	7.85	—	60	8	4	●	2	*	*	*	*
D0800R20N040	8	2	12	40	7.85	—	100	8	4	●	2	*	*	*	*
D0800R20N056	8	2	12	56	7.85	—	120	8	4	★	2	*	*	*	*
D0800R20N072	8	2	12	72	7.85	—	120	8	4	★	2	*	*	*	*
D0900R20	9	2	13.5	—	—	—	100	8	4	★	3	*	*	*	*
D1000R05N030	10	0.5	15	30	9.7	—	70	10	4	●	2	*	*	*	*
D1000R05N050	10	0.5	15	50	9.7	—	110	10	4	●	2	*	*	*	*
D1000R10N030	10	1	15	30	9.7	—	70	10	4	●	2	*	*	*	*
D1000R10N050	10	1	15	50	9.7	—	110	10	4	●	2	*	*	*	*
D1000R20N030	10	2	15	30	9.7	—	70	10	4	●	2	*	*	*	*
D1000R20N050	10	2	15	50	9.7	—	110	10	4	●	2	*	*	*	*
D1000R20N070	10	2	15	70	9.7	—	150	10	4	★	2	*	*	*	*
D1000R20N090	10	2	15	90	9.7	—	150	10	4	★	2	*	*	*	*
D1100R20	11	2	16.5	—	—	—	110	10	4	★	3	*	*	*	*
D1200R05N036	12	0.5	18	36	11.7	—	80	12	4	●	2	*	*	*	*
D1200R05N060	12	0.5	18	60	11.7	—	120	12	4	●	2	*	*	*	*
D1200R10N036	12	1	18	36	11.7	—	80	12	4	●	2	*	*	*	*
D1200R10N060	12	1	18	60	11.7	—	120	12	4	●	2	*	*	*	*
D1200R20N036	12	2	18	36	11.7	—	80	12	4	★	2	*	*	*	*
D1200R20N060	12	2	18	60	11.7	—	120	12	4	★	2	*	*	*	*
D1200R20N084	12	2	18	84	11.7	—	160	12	4	★	2	*	*	*	*
D1200R20N108	12	2	18	108	11.7	—	160	12	4	★	2	*	*	*	*
D1200R30N036	12	3	18	36	11.7	—	80	12	4	●	2	*	*	*	*
D1200R30N060	12	3	18	60	11.7	—	120	12	4	●	2	*	*	*	*
D1300R30	13	3	19.5	—	—	—	120	12	4	★	3	*	*	*	*
D1600R05N042	16	0.5	24	42	15.5	—	100	16	4	●	2	*	*	*	*
D1600R20N042	16	2	24	42	15.5	—	100	16	4	●	2	*	*	*	*
D1600R30N042	16	3	24	42	15.5	—	100	16	4	●	2	*	*	*	*
D1600R30N080	16	3	24	80	15.5	—	140	16	4	●	2	*	*	*	*
D1600R30N120	16	3	24	120	15.5	—	175	16	4	★	2	*	*	*	*

* : No interference

IMPACT MIRACLE END MILLS

VF45VB NEW

Ball nose, Short cut length, 4 flute, Variable curve



R ≤ 6 ±0.01
R > 6 ±0.02




D1 ≤ 12 0 - -0.02
D1 > 12 0 - -0.03



D4 = 6 0 - -0.008
8 ≤ D4 ≤ 10 0 - -0.009
12 ≤ D4 ≤ 16 0 - -0.011
D4 = 20 0 - -0.013

Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-Hardened Steel, Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
++	+			++	++		

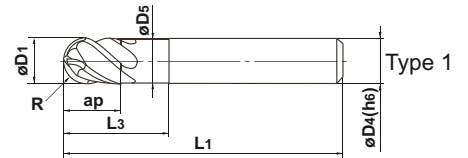




Helix angle

- Impact Miracle end mill with variable curve ensures stable machining of difficult-to-cut materials.

Unit : mm

Order Number	Radius of Ball Nose R	Dia. D1	Length of Cut ap	Neck Length L3	Neck Dia. D5	Overall Length L1	Shank Dia. D4	No. of Flutes N	Stock	Type
VF4SVBR0300	3	6	9	15	5.85	50	6	4	●	1
R0400	4	8	12	20	7.85	60	8	4	●	1
R0500	5	10	15	25	9.7	70	10	4	●	1
R0600	6	12	18	30	11.7	75	12	4	●	1
R0800	8	16	24	40	15.5	90	16	4	●	1
R1000	10	20	30	50	19.5	100	20	4	●	1

Vibration Resistance Comparison

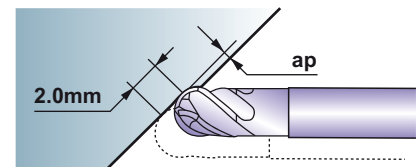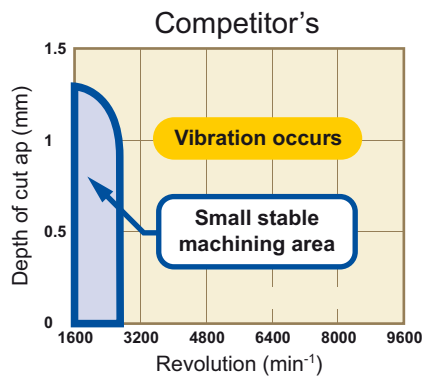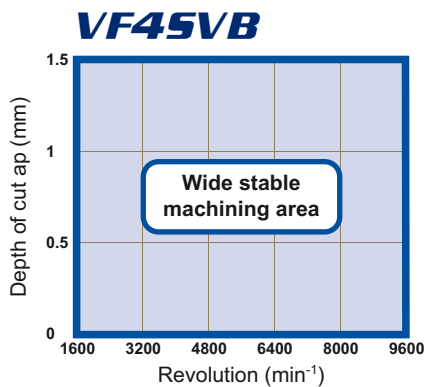

Endmill	VF4SVBR0500 (R5)
Work Material	DIN X5CrNi18-10
Revolution	1600-9600min ⁻¹
Feed rate	580-2300mm/min (0.06mm/tooth)
Cutting fluid	Emulsion



$D1 \leq 12$ 0 - -0.02
 $D1 > 12$ 0 - -0.03



$4 \leq D4 \leq 6$ 0 - -0.008
 $8 \leq D4 \leq 10$ 0 - -0.009
 $12 \leq D4 \leq 16$ 0 - -0.011
 $D4 = 20$ 0 - -0.013

Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-Hardened Steel, Hardened Steel ($\leq 45\text{HRC}$)	Hardened Steel ($\leq 55\text{HRC}$)	Hardened Steel ($> 55\text{HRC}$)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
++	++	+		++	++		





Helix angle
 $D1 < 6$




Helix angle
 $D1 \geq 6$




Gash land

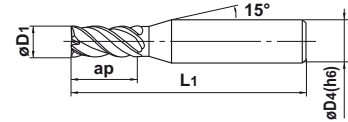

Type 1



Type 2

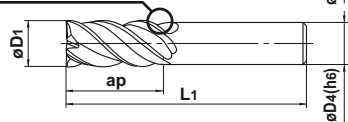

Type 3

Unit : mm

● Impact Miracle end mill with irregular helix flutes ensures stable machining of difficult-to-cut materials and with long overhangs.

Order Number	Dia.	Length of Cut	Overall Length	Shank Dia.	No. of Flute	Stock	Type
	D1	ap	L1	D4	N		
NEW VFMHVD0200	2	4	45	4	4	●	1
NEW D0250	2.5	5	45	4	4	●	1
NEW D0300	3	8	45	6	4	●	1
NEW D0350	3.5	8	45	6	4	●	1
NEW D0400	4	11	45	6	4	●	1
NEW D0500	5	13	50	6	4	●	1
D0600	6	13	50	6	4	●	2
D0600A070	6	13	70	6	4	●	2
NEW D0700	7	19	60	8	4	●	1
D0800	8	19	60	8	4	●	2
D0800A080	8	19	80	8	4	●	2
NEW D0900	9	22	70	10	4	●	1
D1000A100S08	10	22	100	8	4	●	3
D1000	10	22	70	10	4	●	2
D1000A100	10	22	100	10	4	●	2
D1100	11	26	100	10	4	●	3
D1200A110S10	12	26	110	10	4	●	3
D1200	12	26	75	12	4	●	2
D1200A110	12	26	110	12	4	●	2
D1300	13	26	110	12	4	●	3
D1400A130S12	14	32	130	12	4	●	3
D1600	16	35	90	16	4	●	2
D1800A150S16	18	42	150	16	4	●	3
D2000	20	45	110	20	4	●	2

IMPACT MIRACLE END MILLS

VFJHV NEW

End mill, Semi long cut length, 4 flute, Irregular helix flutes




$D1 \leq 12$ 0 - -0.02
 $D1 > 12$ 0 - -0.03



$D4 = 6$ 0 - -0.008
 $8 \leq D4 \leq 10$ 0 - -0.009
 $12 \leq D4 \leq 16$ 0 - -0.011
 $D4 = 20$ 0 - -0.013

Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-Hardened Steel, Hardened Steel ($\leq 45\text{HRC}$)	Hardened Steel ($\leq 55\text{HRC}$)	Hardened Steel ($> 55\text{HRC}$)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
++	++	+		++	++		




Helix angle $D1 \leq 6$



Helix angle $D1 > 6$



Gash land

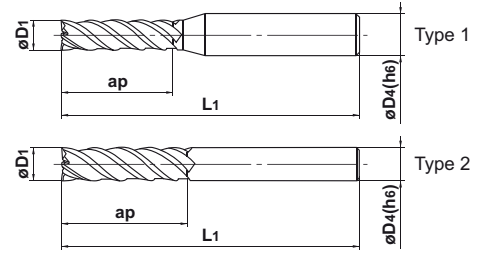


- Impact Miracle end mill with irregular helix flutes ensures stable machining of difficult-to-cut materials.
- Suitable for machining with long axial depth of cut.

Unit : mm

Order Number	Dia. D1	Length of Cut ap	Overall Length L1	Shank Dia. D4	No. of Flute N	Stock	Type
VFJHVD0200	2	8	60	6	4	●	1
D0300	3	12	60	6	4	●	1
D0400	4	16	60	6	4	●	1
D0500	5	20	60	6	4	●	1
D0600	6	24	60	6	4	●	2
D0800	8	28	80	8	4	●	2
D1000	10	35	90	10	4	●	2
D1200	12	40	100	12	4	●	2
D1600	16	55	125	16	4	●	2
D2000	20	60	140	20	4	●	2

Stable cutting area comparison when machining hardened steel

Excellent vibration absorption provides stability over a wide range cutting conditions even on hardened steel.

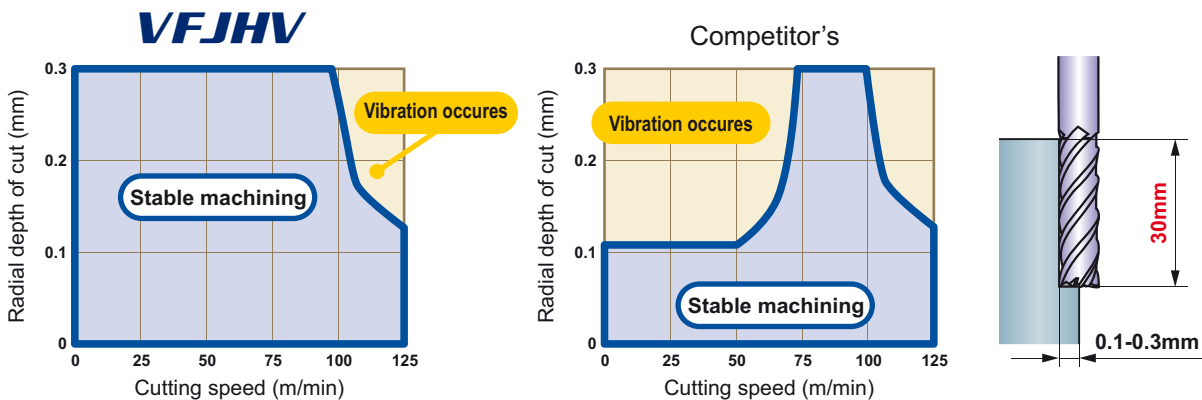

End mill	VFJHVD1000 ($\phi 10$)
Work material	X40CrMoV51 (52HRC)
Revolution	795-3980min ⁻¹ (25-125m/min)
Feed rate	140-700mm/min (0.044mm/tooth)
Cutting fluid	Air blow

VFMHVRB Extension

Corner radius end mill, Medium cut length, 4 flute, Irregular helix flutes




D1 ≤ 12 0 - -0.02
D1 > 12 0 - -0.03



D4 = 6 0 - -0.008
8 ≤ D4 ≤ 10 0 - -0.009
12 ≤ D4 ≤ 16 0 - -0.011
D4 = 20 0 - -0.013

Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-Hardened Steel, Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
++	++	+		++	++		

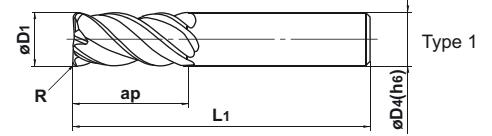

Helix Angle

- Impact Miracle end mill with irregular helix flutes ensures stable machining of difficult-to-cut materials and with long overhangs.

Unit : mm

Order Number	Dia.	Corner R	Length of Cut	Overall Length	Shank Dia.	No. of Flute	Stock	Type
	D1	R	ap	L1	D4	N		
VFMHVRBD0600R050	6	0.5	13	50	6	4	●	1
D0600R100	6	1	13	50	6	4	●	1
D0800R050	8	0.5	19	60	8	4	●	1
D0800R100	8	1	19	60	8	4	●	1
D1000R050	10	0.5	22	70	10	4	●	1
D1000R100	10	1	22	70	10	4	●	1
D1000R200	10	2	22	70	10	4	●	1
D1200R050	12	0.5	26	75	12	4	●	1
D1200R100	12	1	26	75	12	4	●	1
D1200R200	12	2	26	75	12	4	●	1
D1600R100	16	1	35	90	16	4	●	1
D1600R200	16	2	35	90	16	4	●	1
D1600R300	16	3	35	90	16	4	●	1
D2000R100	20	1	45	110	20	4	●	1
D2000R200	20	2	45	110	20	4	●	1
D2000R300	20	3	45	110	20	4	●	1
NEW D2000R300	20	4	45	110	20	4	●	1

Variable helix


To prevent vibration!

- Stable machining

Variable helix prevents vibration and generates high quality surface finishes.



End mill	VFMHVRBD1000R20N030 (φ10)
Work material	DIN Ck55
Revolution	4800min ⁻¹ (150m/min)
Feed rate	2280mm/min (0.12mm/tooth)
Cutting fluid	Air blow



IMPACT MIRACLE END MILLS

VF6MHV

End mill, Medium cut length, 6 flute, Irregular helix flutes




D1 ≤ 12 0 - -0.02
D1 > 12 0 - -0.03



D4 = 6 0 - -0.008
8 ≤ D4 ≤ 10 0 - -0.009
12 ≤ D4 ≤ 16 0 - -0.011
D4 = 20 0 - -0.013

Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-Hardened Steel, Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
++	++	+		++	++		

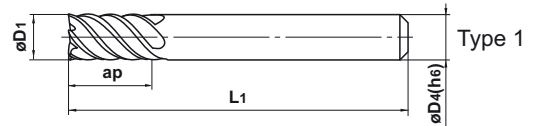

Helix angle Gash land

- Newly developed irregular helix 6 flute geometry reduces vibrations and achieves high efficiency machining.
- Suitable for machining of difficult-to-cut materials such as stainless steel, titanium alloy and inconel.

Unit : mm

Order Number	Dia.	Length of Cut	Overall Length	Shank Dia.	No. of Flute	Stock	Type
	D1	ap	L1	D4	N		
VF6MHVD0600	6	13	50	6	6	●	1
D0800	8	19	60	8	6	●	1
D1000	10	22	70	10	6	●	1
D1200	12	26	75	12	6	●	1
D1600	16	32	90	16	6	●	1
D2000	20	38	100	20	6	●	1

VF6MHVRB

Corner radius end mill, Medium cut length, 6 flute, Irregular helix flutes




$D_1 \leq 12$ 0 - -0.02
 $D_1 > 12$ 0 - -0.03



$D_4 = 6$ 0 - -0.008
 $8 \leq D_4 \leq 10$ 0 - -0.009
 $12 \leq D_4 \leq 16$ 0 - -0.011
 $D_4 = 20$ 0 - -0.013

Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-Hardened Steel, Hardened Steel ($\leq 45\text{HRC}$)	Hardened Steel ($\leq 55\text{HRC}$)	Hardened Steel ($> 55\text{HRC}$)	Austenitic Stainless Steel	Titanium Alloy, Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
++	++	+		++	++		

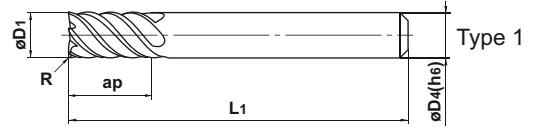

- Newly developed irregular helix 6 flute geometry reduces vibrations and achieves high efficiency machining.
- Suitable for machining of difficult-to-cut materials such as stainless steel, titanium alloy and inconel.

Unit : mm

Order Number	Dia. D1	Corner Radius R	Length of Cut ap	Overall Length L1	Shank Dia. D4	No. of Flute N	Stock	Type
VF6MHVRBD0600R050	6	0.5	13	50	6	6	●	1
D0600R100	6	1	13	50	6	6	●	1
D0800R050	8	0.5	19	60	8	6	●	1
D0800R100	8	1	19	60	8	6	●	1
D1000R050	10	0.5	22	70	10	6	●	1
D1000R100	10	1	22	70	10	6	●	1
D1200R050	12	0.5	26	75	12	6	●	1
D1200R100	12	1	26	75	12	6	●	1
D1600R100	16	1	32	90	16	6	●	1
D1600R200	16	2	32	90	16	6	●	1
D2000R100	20	1	38	100	20	6	●	1
D2000R200	20	2	38	100	20	6	●	1

High efficiency finishing with the 6 flute radius end mill

VF6MHVRB

No vibration

1mm


Normal wear

Competitor's 6 flute radius end mill

Large vibration marks

1mm

Chipping

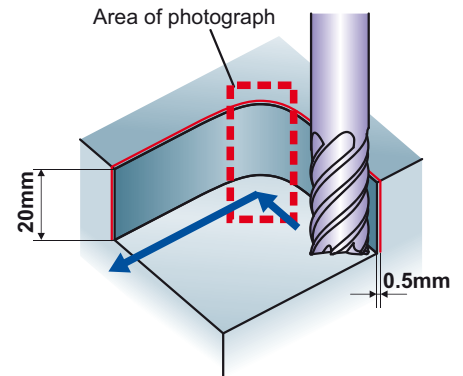

Machining of pocket corners with straight right angle cutting edge paths.

End mill	VF6MHVRBD1000R100 ($\phi 10 \times R1$)
Work material	X5CrNi18-10
Revolution	6000min^{-1} (188m/min)
Feed rate	2160mm/min (0.06mm/tooth)
Cutting fluid	Emulsion

IMPACT MIRACLE END MILL

VF2MV

2 flute, Medium cut length, Irregular helix flutes



0 - -0.020




4 ≤ D4 ≤ 6 0 - -0.008

Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
+	++	++	++				



Helix angle Gash land

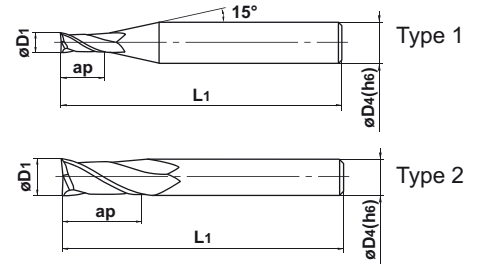



- An irregular helix 2 flute square end mill suitable for high-speed machining of hardened steel.

Unit : mm

Order Number	Dia. D1	Length of Cut ap	Overall Length L1	Shank Dia. D4	No. of Flute N	Stock	Type
VF2MVD0050	0.5	1.3	40	4	2	●	1
D0100	1	2.5	40	4	2	●	1
D0150	1.5	3.8	40	4	2	●	1
D0200	2	5	40	4	2	●	1
D0250	2.5	6.3	40	4	2	●	1
D0300	3	7.5	50	6	2	●	1
D0400	4	10	50	6	2	●	1
D0500	5	12.5	50	6	2	●	1
D0600	6	15	50	6	2	●	2

Cutting Performance

- Excellent anti-vibration features allows stable machining over a wider application area compared to conventional 2 flute end mills.

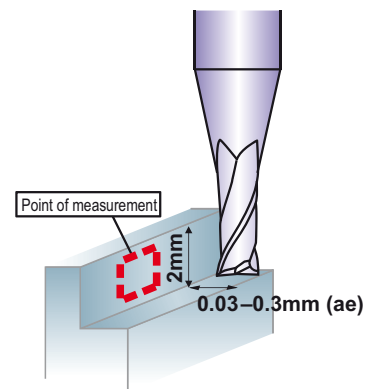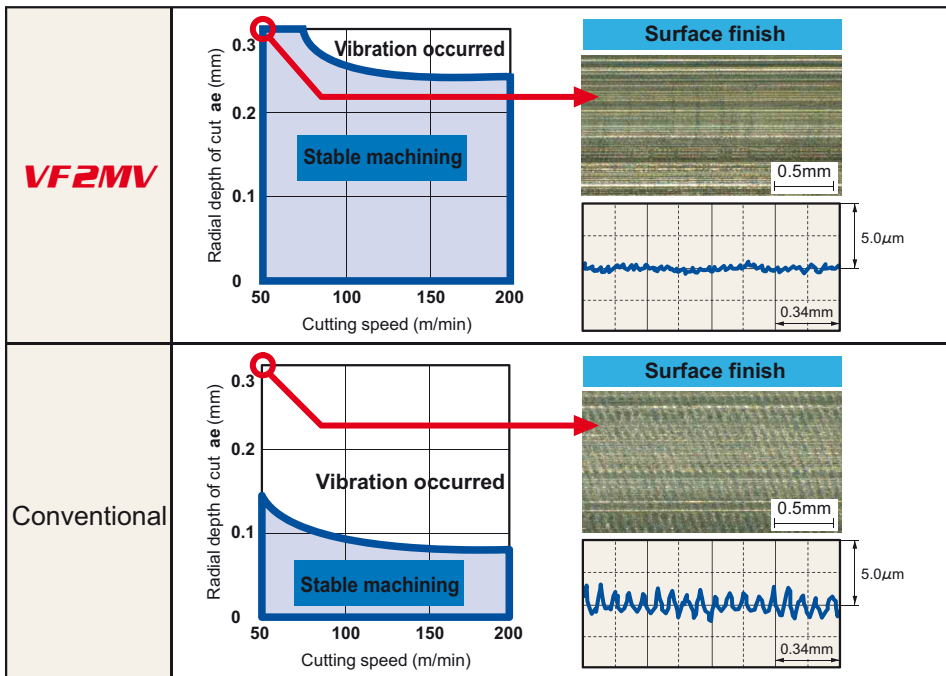

End mill	VF2MVD0200 (ø2)
Workpiece	W.Nr. 1.2344 (52HRC)
Feed rate	50-200m/min (0.02mm/tooth)
Machining method	Down cut , Air blow

VF4MV

4 flute, Medium cut length, Irregular helix flutes




$D1 \leq 12$ 0 - -0.020
 $D1 > 12$ 0 - -0.030



$D4 = 6$ 0 - -0.008
 $8 \leq D4 \leq 10$ 0 - -0.009
 $12 \leq D4 \leq 16$ 0 - -0.011
 $D4 = 20$ 0 - -0.013

Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-Hardened Steel ($\leq 45\text{HRC}$)	Hardened Steel ($\leq 55\text{HRC}$)	Hardened Steel ($> 55\text{HRC}$)	Austenitic Stainless Steel	Titanium Alloy Heat Resistant Alloy	Copper Alloy	Aluminium Alloy
+	++	++	++				

* For austenitic stainless steels, titanium and heat-resistant alloys, VF4MV is recommended.

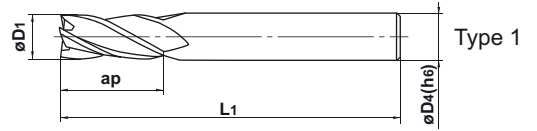



- An irregular helix 4 flute square end mill suitable for high-speed machining of hardened steel.

Unit : mm

Order Number	Dia. D1	Length of Cut ap	Overall Length L1	Shank Dia. D4	No. of Flute N	Stock	Type
VF4MVD0600	6	15	50	6	4	●	1
D0800	8	20	60	8	4	●	1
D1000	10	25	70	10	4	●	1
D1200	12	30	90	12	4	●	1
D1600	16	40	100	16	4	●	1
D2000	20	50	110	20	4	●	1

Cutting Performance

- The VF4MV delivers excellent vibration resistance when machining hardened steel.

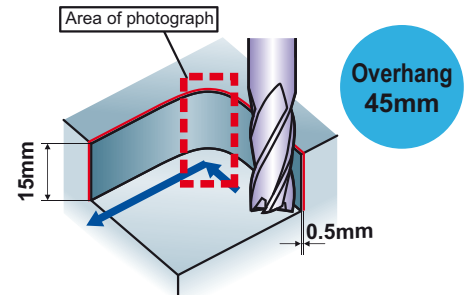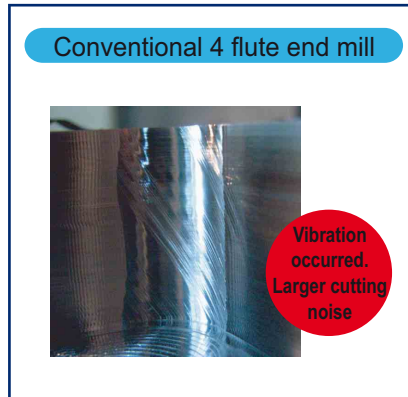

Machining of pocket shaped corners with right angle tool paths

End mill	VF4MVD1000 ($\phi 10$)
Workpiece	W.Nr. 1.2344 (52HRC)
Revolution	2500min ⁻¹ (188m/min)
Feed rate	600mm/min (0.06mm/tooth)
Machining method	Down cut , Air blow

IMPACT MIRACLE END MILLS


VFHVRB

4 flute, Corner radius, Short cut length, Irregular helix flutes

High speed conditions

Work material			Carbon steel, Alloy steel (-30HRC) CK55, 41CrMo				Alloy steel, Tool steel Pre-hardened steel (30-45HRC) W.Nr.1.2344(H13), X210Cr12				Hardened steel (45-55HRC) W.Nr.1.2344(H13)				Hardened steel (55-60HRC) X210Cr12, S6-5-2			
Dia. (mm)	R (mm)	Neck length (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut ap (mm)	Depth of cut ae (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut ap (mm)	Depth of cut ae (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut ap (mm)	Depth of cut ae (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut ap (mm)	Depth of cut ae (mm)
1	0.2	4	40000	7200	0.04	0.45	33000	5100	0.03	0.45	27000	4100	0.025	0.45	20000	1800	0.013	0.45
1	0.2	6	40000	6500	0.03	0.45	33000	4600	0.022	0.45	27000	3700	0.018	0.45	20000	1600	0.01	0.45
1	0.2	8	32000	4500	0.022	0.45	27000	3200	0.018	0.45	21000	2600	0.012	0.45	16000	1100	0.008	0.45
1	0.2	10	24000	2700	0.015	0.45	20000	1900	0.01	0.45	16000	1500	0.008	0.45	12000	700	0.006	0.45
1	0.2	15	16000	1200	0.008	0.45	14000	700	0.005	0.45	12000	500	0.003	0.45	10000	400	0.003	0.45
1	0.2	20	14000	1000	0.005	0.45	12000	600	0.004	0.45	10000	400	0.002	0.45	9000	300	0.002	0.45
1.5	0.3	4	32000	10000	0.1	0.65	27000	7100	0.08	0.65	21000	5700	0.06	0.65	16000	2500	0.03	0.65
1.5	0.3	6	32000	7800	0.08	0.65	27000	5500	0.06	0.65	21000	4200	0.05	0.65	16000	2000	0.025	0.65
1.5	0.3	10	27000	5700	0.05	0.65	22000	4000	0.035	0.65	18000	3000	0.03	0.65	14000	1400	0.014	0.65
1.5	0.3	15	22000	3200	0.03	0.65	18000	2300	0.025	0.65	15000	1700	0.018	0.65	11000	1000	0.009	0.65
1.5	0.3	20	16000	1400	0.02	0.65	14000	1200	0.016	0.65	13000	1000	0.012	0.65	9000	700	0.007	0.65
1.5	0.3	25	13000	1000	0.015	0.65	11000	800	0.012	0.65	10000	700	0.009	0.65	7500	500	0.005	0.65
1.5	0.3	30	13000	900	0.01	0.65	11000	700	0.008	0.65	10000	600	0.006	0.65	7500	400	0.004	0.65
2	0.5	6	24000	10000	0.1	0.75	20000	7100	0.08	0.75	16000	5700	0.06	0.75	12000	2500	0.03	0.75
2	0.5	10	24000	10000	0.08	0.75	20000	7100	0.06	0.75	16000	5700	0.05	0.75	12000	2500	0.025	0.75
2	0.5	15	20000	7000	0.05	0.75	17000	5000	0.04	0.75	13000	3200	0.03	0.75	10000	1800	0.016	0.75
2	0.5	20	20000	3600	0.04	0.75	17000	2600	0.03	0.75	13000	1800	0.025	0.75	10000	900	0.012	0.75
2	0.5	25	16000	1800	0.03	0.75	14000	1400	0.025	0.75	12000	1100	0.02	0.75	9000	720	0.01	0.75
2	0.5	30	16000	1400	0.025	0.75	14000	1200	0.02	0.75	12000	900	0.016	0.75	9000	650	0.008	0.75
2	0.5	35	13000	1100	0.02	0.75	11000	800	0.018	0.75	10000	700	0.014	0.75	7000	500	0.007	0.75
2	0.5	40	13000	1000	0.02	0.75	11000	700	0.015	0.75	10000	600	0.012	0.75	7000	400	0.006	0.75
3	0.5	10	16000	11000	0.12	1.5	13000	7800	0.09	1.5	11000	6300	0.07	1.5	8000	2800	0.04	1.5
3	0.5	15	16000	9000	0.11	1.5	13000	6400	0.08	1.5	11000	5100	0.06	1.5	8000	2300	0.04	1.5
3	0.5	20	13000	7200	0.09	1.5	11000	5100	0.07	1.5	8700	4000	0.05	1.5	6500	1800	0.03	1.5
3	0.5	30	13000	5700	0.06	1.5	11000	4000	0.05	1.5	8700	3000	0.04	1.5	6500	1400	0.02	1.5
3	0.8	10	16000	11000	0.24	1	13000	7800	0.19	1	11000	6300	0.14	1	8000	2800	0.07	1
3	0.8	15	16000	9000	0.22	1	13000	6400	0.17	1	11000	5100	0.13	1	8000	2300	0.07	1
3	0.8	20	13000	7200	0.19	1	11000	5100	0.15	1	8700	4000	0.11	1	6500	1800	0.06	1
3	0.8	30	13000	5700	0.12	1	11000	4000	0.09	1	8700	3000	0.07	1	6500	1400	0.04	1
3	0.8	40	11000	3600	0.08	1	9100	2600	0.06	1	7400	2000	0.05	1	5500	1000	0.025	1
3	0.8	50	8000	2600	0.07	1	6600	1800	0.05	1	5800	1500	0.04	1	4600	800	0.02	1
4	0.5	12	8400	6000	0.15	2	7000	4300	0.12	2	5600	3400	0.09	2	4200	1500	0.05	2
4	0.5	20	8400	6000	0.14	2	7000	4300	0.11	2	5600	3400	0.08	2	4200	1500	0.04	2
4	0.5	30	6900	4900	0.12	2	5700	3500	0.09	2	4600	2800	0.07	2	3500	1200	0.03	2
4	0.5	48	5600	2000	0.07	2	4600	1400	0.05	2	3800	1100	0.04	2	2800	500	0.02	2
4	1	12	12000	12000	0.3	1.5	10000	8500	0.23	1.5	8000	6800	0.18	1.5	6000	3000	0.1	1.5
4	1	20	12000	12000	0.27	1.5	10000	8500	0.21	1.5	8000	6800	0.16	1.5	6000	3000	0.08	1.5
4	1	30	10000	9900	0.24	1.5	8300	7000	0.19	1.5	6700	5600	0.14	1.5	5000	2500	0.07	1.5
6	0.5	18	4000	3900	0.15	3.5	3300	2800	0.12	3.5	2700	2200	0.09	3.5	2000	1000	0.05	3.5
6	0.5	30	4000	3900	0.14	3.5	3300	2800	0.11	3.5	2700	2200	0.08	3.5	2000	1000	0.04	3.5
6	1	18	8000	13000	0.5	3	6600	9200	0.4	3	5400	7400	0.3	3	4000	3300	0.15	3
6	1	30	8000	13000	0.45	3	6600	9200	0.35	3	5400	7400	0.27	3	4000	3300	0.14	3
6	1	54	6600	11000	0.25	3	5500	7800	0.2	3	4400	6300	0.15	3	3300	2800	0.08	3
6	1.5	18	8000	13000	0.5	2	6600	9200	0.4	2	5400	7400	0.3	2	4000	3300	0.15	2
6	1.5	30	8000	13000	0.45	2	6600	9200	0.35	2	5400	7400	0.27	2	4000	3300	0.14	2
6	1.5	42	6600	11000	0.4	2	5500	7800	0.3	2	4400	6300	0.24	2	3300	2800	0.12	2
6	1.5	54	6600	11000	0.25	2	5500	7800	0.2	2	4400	6300	0.15	2	3300	2800	0.08	2
6	2	18	8000	13000	0.5	1.5	6600	9200	0.4	1.5	5400	7400	0.3	1.5	4000	3300	0.15	1.5
6	2	30	8000	13000	0.45	1.5	6600	9200	0.35	1.5	5400	7400	0.27	1.5	4000	3300	0.14	1.5

Depth of cut



High speed conditions

Work material			Carbon steel, Alloy steel (~30HRC) CK55, 41CrMo				Alloy steel, Tool steel Pre-hardened steel (30-45HRC) W.Nr.1.2344(H13), X210Cr12				Hardened steel (45-55HRC) W.Nr.1.2344(H13)				Hardened steel (55-60HRC) X210Cr12, S6-5-2			
Dia. (mm)	R (mm)	Neck length (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut ap (mm)	Depth of cut ae (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut ap (mm)	Depth of cut ae (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut ap (mm)	Depth of cut ae (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut ap (mm)	Depth of cut ae (mm)
7	1.5	—	6800	13000	0.5	3	5600	9200	0.4	3	4600	7400	0.3	3	3400	3300	0.15	3
8	0.5	24	3000	3900	0.18	5	2500	2800	0.14	5	2000	2200	0.11	5	1500	1000	0.05	5
8	0.5	40	3000	3900	0.16	5	2500	2800	0.12	5	2000	2200	0.1	5	1500	1000	0.05	5
8	1	24	4200	6500	0.3	4.5	3500	4600	0.23	4.5	2800	3700	0.18	4.5	2100	1600	0.09	4.5
8	1	40	4200	6500	0.27	4.5	3500	4600	0.21	4.5	2800	3700	0.16	4.5	2100	1600	0.08	4.5
8	2	24	6000	13000	0.6	3	5000	9200	0.46	3	4000	7400	0.36	3	3000	3300	0.18	3
8	2	40	6000	13000	0.54	3	5000	9200	0.42	3	4000	7400	0.32	3	3000	3300	0.16	3
8	2	56	5000	11000	0.48	3	4200	7800	0.37	3	3400	6300	0.3	3	2500	2800	0.14	3
8	2	72	5000	11000	0.3	3	4200	7800	0.23	3	3400	6300	0.2	3	2500	2800	0.09	3
9	2	—	5300	13000	0.6	3.5	4400	9200	0.46	3.5	3600	7400	0.36	3.5	2700	3300	0.18	3.5
10	0.5	30	2400	3900	0.18	6.5	2000	2800	0.14	6.5	1600	2200	0.11	6.5	1200	1000	0.05	6.5
10	0.5	50	2400	3900	0.16	6.5	2000	2800	0.12	6.5	1600	2200	0.1	6.5	1200	1000	0.05	6.5
10	1	30	3300	6500	0.3	6	2700	4600	0.23	6	2200	3700	0.18	6	1700	1600	0.09	6
10	1	50	3300	6500	0.27	6	2700	4600	0.21	6	2200	3700	0.16	6	1700	1600	0.08	6
10	2	30	4800	13000	0.6	4.5	4000	9200	0.46	4.5	3200	7400	0.36	4.5	2400	3300	0.18	4.5
10	2	50	4800	13000	0.54	4.5	4000	9200	0.42	4.5	3200	7400	0.32	4.5	2400	3300	0.16	4.5
10	2	70	4000	11000	0.48	4.5	3300	7800	0.37	4.5	2700	6300	0.3	4.5	2000	2800	0.14	4.5
10	2	90	4000	11000	0.48	4.5	3300	7800	0.37	4.5	2700	6300	0.3	4.5	2000	2800	0.14	4.5
11	2	—	4300	12000	0.6	5	3600	8500	0.46	5	2900	6800	0.36	5	2200	3000	0.18	5
12	0.5	36	2000	3600	0.27	8	1700	2600	0.21	8	1300	2100	0.14	8	1000	900	0.07	8
12	0.5	60	2000	3600	0.24	8	1700	2600	0.18	8	1300	2100	0.12	8	1000	900	0.06	8
12	1	36	2400	4800	0.36	7.5	2000	3400	0.28	7.5	1600	2700	0.18	7.5	1200	1200	0.09	7.5
12	1	60	2400	4800	0.32	7.5	2000	3400	0.25	7.5	1600	2700	0.16	7.5	1200	1200	0.08	7.5
12	2	36	4000	12000	0.9	6	3300	8500	0.7	6	2700	6800	0.45	6	2000	3000	0.23	6
12	2	60	4000	12000	0.8	6	3300	8500	0.6	6	2700	6800	0.4	6	2000	3000	0.2	6
12	2	84	3300	9900	0.7	6	2700	7000	0.55	6	2200	5600	0.36	6	1700	2500	0.18	6
12	2	108	3300	9900	0.45	6	2700	7000	0.35	6	2200	5600	0.23	6	1700	2500	0.11	6
12	3	36	4000	12000	0.9	4.5	3300	8500	0.7	4.5	2700	6800	0.45	4.5	2000	3000	0.23	4.5
12	3	60	4000	12000	0.8	4.5	3300	8500	0.6	4.5	2700	6800	0.4	4.5	2000	3000	0.2	4.5
13	3	—	3700	12000	0.9	5	3100	8500	0.7	5	2500	6800	0.45	5	1900	3000	0.23	5
16	0.5	42	1500	3000	0.27	11	1200	2100	0.21	11	1000	1700	0.12	11	750	750	0.05	11
16	2	42	2100	5000	0.45	9	1700	3600	0.35	9	1400	2900	0.2	9	1100	1300	0.08	9
16	3	42	3000	10000	0.9	7.5	2500	7100	0.7	7.5	2000	5700	0.4	7.5	1500	2500	0.15	7.5
16	3	80	3000	10000	0.8	7.5	2500	7100	0.6	7.5	2000	5700	0.37	7.5	1500	2500	0.14	7.5
16	3	120	2500	8300	0.7	7.5	2100	5900	0.55	7.5	1700	4700	0.32	7.5	1300	2100	0.12	7.5

Depth of cut

- 1) When contour milling, cutting conditions can vary greatly due to the geometry of workpiece or the cutting method.
Please reduce the feed rate especially at corners.
- 2) If the rigidity of the machine or the workpiece installation is very low, or chattering and noise are generated,
please reduce the revolution and feed rate proportionately, or reduce the depth of cut.
- 3) Air blow or oil mist is strongly recommended for good chip evacuation.

IMPACT MIRACLE END MILLS

VFHVRB


4 flute, Corner radius, Short cut length, Irregular helix flutes

High depth of cut conditions

Please refer to high speed conditions in case of "-".

Work material			Carbon steel, Alloy steel (-30HRC) Ck55, 41CrMo				Alloy steel, Tool steel Pre-hardened steel (30-45HRC) W.Nr.1.2344(H13), X210Cr12				Hardened steel (45-55HRC) W.Nr.1.2344(H13)				Hardened steel (55-60HRC) X210Cr12, S6-5-2			
Dia. (mm)	R (mm)	Neck length (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut ap (mm)	Depth of cut ae (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut ap (mm)	Depth of cut ae (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut ap (mm)	Depth of cut ae (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut ap (mm)	Depth of cut ae (mm)
1	0.2	4	24000	2200	0.08	0.45	20000	1500	0.07	0.45	16000	1200	0.05	0.45	12000	550	0.025	0.45
1	0.2	6	24000	2000	0.07	0.45	20000	1400	0.05	0.45	16000	1100	0.04	0.45	12000	500	0.02	0.45
1	0.2	8	19000	1400	0.05	0.45	16000	1000	0.04	0.45	13000	800	0.03	0.45	9500	350	0.016	0.45
1	0.2	10	14000	800	0.04	0.45	12000	600	0.03	0.45	9000	400	0.025	0.45	7000	200	0.012	0.45
1	0.2	15	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1	0.2	20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.5	0.3	4	19000	3000	0.2	0.65	16000	2100	0.16	0.65	13000	1700	0.12	0.65	9500	750	0.06	0.65
1.5	0.3	6	19000	2300	0.16	0.65	16000	1600	0.13	0.65	13000	1300	0.1	0.65	9500	580	0.05	0.65
1.5	0.3	10	16000	1700	0.1	0.65	13000	1200	0.07	0.65	11000	1000	0.05	0.65	8000	430	0.03	0.65
1.5	0.3	15	13000	1000	0.06	0.65	11000	700	0.05	0.65	9000	600	0.04	0.65	6500	250	0.018	0.65
1.5	0.3	20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.5	0.3	25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.5	0.3	30	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2	0.5	6	14000	3000	0.2	0.75	12000	2100	0.16	0.75	9400	1700	0.12	0.75	7000	750	0.06	0.75
2	0.5	10	14000	3000	0.16	0.75	12000	2100	0.13	0.75	9400	1700	0.1	0.75	7000	750	0.05	0.75
2	0.5	15	12000	2100	0.1	0.75	10000	1500	0.08	0.75	8000	1200	0.06	0.75	6000	530	0.03	0.75
2	0.5	20	12000	1100	0.08	0.75	10000	800	0.06	0.75	8000	600	0.05	0.75	6000	280	0.025	0.75
2	0.5	25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2	0.5	30	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2	0.5	35	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2	0.5	40	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3	0.5	10	9600	3300	0.24	1.5	8000	2300	0.2	1.5	6400	1800	0.14	1.5	4800	830	0.07	1.5
3	0.5	15	9600	2700	0.22	1.5	8000	1900	0.17	1.5	6400	1500	0.13	1.5	4800	680	0.06	1.5
3	0.5	20	7800	2200	0.18	1.5	6500	1500	0.14	1.5	5200	1200	0.11	1.5	3900	550	0.05	1.5
3	0.5	30	7800	1700	0.12	1.5	6500	1200	0.1	1.5	5200	1000	0.07	1.5	3900	430	0.04	1.5
3	0.8	10	9600	3300	0.5	1	8000	2300	0.4	1	6400	1800	0.3	1	4800	830	0.14	1
3	0.8	15	9600	2700	0.5	1	8000	1900	0.35	1	6400	1500	0.25	1	4800	680	0.13	1
3	0.8	20	7800	2200	0.4	1	6500	1500	0.3	1	5200	1200	0.23	1	3900	550	0.11	1
3	0.8	30	7800	1700	0.24	1	6500	1200	0.2	1	5200	1000	0.14	1	3900	430	0.05	1
3	0.8	40	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3	0.8	50	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
4	0.5	12	5000	1800	0.3	2	4200	1300	0.24	2	3400	1000	0.18	2	2500	450	0.06	2
4	0.5	20	5000	1800	0.3	2	4200	1300	0.22	2	3400	1000	0.17	2	2500	450	0.06	2
4	0.5	30	4100	1500	0.24	2	3400	1100	0.19	2	2700	840	0.14	2	2100	380	0.05	2
4	0.5	48	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
4	1	12	7200	3600	0.6	1.5	6000	2500	0.5	1.5	4800	2000	0.36	1.5	3600	900	0.12	1.5
4	1	20	7200	3600	0.6	1.5	6000	2500	0.4	1.5	4800	2000	0.32	1.5	3600	900	0.11	1.5
4	1	30	6000	3000	0.5	1.5	5000	2100	0.4	1.5	4000	1700	0.3	1.5	3000	750	0.1	1.5
6	0.5	18	2400	1200	0.3	3.5	2000	840	0.24	3.5	1600	670	0.18	3.5	1200	300	0.06	3.5
6	0.5	30	2400	1200	0.3	3.5	2000	840	0.22	3.5	1600	670	0.17	3.5	1200	300	0.06	3.5
6	1	18	4800	3900	1	3	4000	2700	0.8	3	3200	2200	0.6	3	2400	980	0.2	3
6	1	30	4800	3900	0.9	3	4000	2700	0.7	3	3200	2200	0.5	3	2400	980	0.18	3
6	1	54	4000	3300	0.5	3	3300	2300	0.4	3	2700	1800	0.3	3	2000	830	0.1	3
6	1.5	18	4800	3900	1	2	4000	2700	0.8	2	3200	2200	0.6	2	2400	980	0.2	2
6	1.5	30	4800	3900	0.9	2	4000	2700	0.7	2	3200	2200	0.5	2	2400	980	0.18	2
6	1.5	42	4000	3300	0.8	2	3300	2300	0.6	2	2700	1800	0.5	2	2000	830	0.16	2
6	1.5	54	4000	3300	0.5	2	3300	2300	0.4	2	2700	1800	0.3	2	2000	830	0.1	2
6	2	18	4800	3900	1	1.5	4000	2700	0.8	1.5	3200	2200	0.6	1.5	2400	980	0.2	1.5
6	2	30	4800	3900	0.9	1.5	4000	2700	0.7	1.5	3200	2200	0.5	1.5	2400	980	0.18	1.5


Depth of cut



High depth of cut conditions

Work material			Carbon steel, Alloy steel (-30HRC) CK55, 41CrMo				Alloy steel, Tool steel Pre-hardened steel (30-45HRC) W.Nr.1.2344(H13), X210Cr12				Hardened steel (45-55HRC) W.Nr.1.2344(H13)				Hardened steel (55-60HRC) X210Cr12, S6-5-2			
Dia. (mm)	R (mm)	Neck length (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut ap (mm)	Depth of cut ae (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut ap (mm)	Depth of cut ae (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut ap (mm)	Depth of cut ae (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut ap (mm)	Depth of cut ae (mm)
7	1.5	—	4100	3900	1	3	3400	2700	0.8	3	2700	2200	0.6	3	2100	980	0.2	3
8	0.5	24	1800	1200	0.35	5	1500	840	0.3	5	1200	670	0.2	5	900	300	0.07	5
8	0.5	40	1800	1200	0.3	5	1500	840	0.25	5	1200	670	0.2	5	900	300	0.06	5
8	1	24	2500	2000	0.6	4.5	2100	1400	0.5	4.5	1700	1100	0.4	4.5	1300	500	0.12	4.5
8	1	40	2500	2000	0.5	4.5	2100	1400	0.4	4.5	1700	1100	0.3	4.5	1300	500	0.11	4.5
8	2	24	3600	3900	1.2	3	3000	2700	1	3	2400	2200	0.7	3	1800	980	0.24	3
8	2	40	3600	3900	1.1	3	3000	2700	0.9	3	2400	2200	0.7	3	1800	980	0.22	3
8	2	56	3000	3300	1	3	2500	2300	0.8	3	2000	1800	0.6	3	1500	830	0.2	3
8	2	72	3000	3300	0.6	3	2500	2300	0.5	3	2000	1800	0.4	3	1500	830	0.12	3
9	2	—	3200	3900	1.2	3.5	2700	2700	1	3.5	2100	2200	0.7	3.5	1600	980	0.24	3.5
10	0.5	30	1400	1200	0.35	6.5	1200	840	0.3	6.5	940	670	0.2	6.5	700	300	0.07	6.5
10	0.5	50	1400	1200	0.3	6.5	1200	840	0.25	6.5	940	670	0.2	6.5	700	300	0.06	6.5
10	1	30	2000	2000	0.6	6	1700	1400	0.5	6	1300	1100	0.4	6	1000	500	0.12	6
10	1	50	2000	2000	0.5	6	1700	1400	0.4	6	1300	1100	0.3	6	1000	500	0.11	6
10	2	30	2900	3900	1.2	4.5	2400	2700	1	4.5	1900	2200	0.7	4.5	1500	980	0.24	4.5
10	2	50	2900	3900	1.1	4.5	2400	2700	0.9	4.5	1900	2200	0.7	4.5	1500	980	0.22	4.5
10	2	70	2400	3300	1	4.5	2000	2300	0.8	4.5	1600	1800	0.6	4.5	1200	830	0.2	4.5
10	2	90	2400	3300	1	4.5	2000	2300	0.8	4.5	1600	1800	0.6	4.5	1200	830	0.2	4.5
11	2	—	2600	3600	1.2	5	2200	2500	1	5	1700	2000	0.7	5	1300	900	0.24	5
12	0.5	36	1200	1100	0.5	8	1000	770	0.4	8	800	620	0.3	8	600	280	0.11	8
12	0.5	60	1200	1100	0.5	8	1000	770	0.4	8	800	620	0.3	8	600	280	0.1	8
12	1	36	1400	1400	0.7	7.5	1200	1000	0.6	7.5	940	780	0.4	7.5	700	350	0.14	7.5
12	1	60	1400	1400	0.6	7.5	1200	1000	0.5	7.5	940	780	0.4	7.5	700	350	0.13	7.5
12	2	36	2400	3600	1.8	6	2000	2500	1.4	6	1600	2000	1.1	6	1200	900	0.4	6
12	2	60	2400	3600	1.6	6	2000	2500	1.3	6	1600	2000	1	6	1200	900	0.3	6
12	2	84	2000	3000	1.4	6	1700	2100	1.1	6	1300	1700	0.8	6	1000	750	0.3	6
12	2	108	2000	3000	0.9	6	1700	2100	0.7	6	1300	1700	0.5	6	1000	750	0.2	6
12	3	36	2400	3600	1.8	4.5	2000	2500	1.4	4.5	1600	2000	1.1	4.5	1200	900	0.4	4.5
12	3	60	2400	3600	1.6	4.5	2000	2500	1.3	4.5	1600	2000	1	4.5	1200	900	0.3	4.5
13	3	—	2200	3600	1.8	5	1800	2500	1.4	5	1500	2000	1.1	5	1100	900	0.4	5
16	0.5	42	900	900	0.5	11	750	630	0.4	11	600	500	0.3	11	450	230	0.1	11
16	2	42	1300	1500	0.9	9	1100	1100	0.7	9	870	840	0.5	9	650	380	0.2	9
16	3	42	1800	3000	1.8	7.5	1500	2100	1.4	7.5	1200	1700	0.9	7.5	900	750	0.4	7.5
16	3	80	1800	3000	1.6	7.5	1500	2100	1.3	7.5	1200	1700	0.8	7.5	900	750	0.3	7.5
16	3	120	1500	2500	1.4	7.5	1200	1800	1.1	7.5	1000	1400	0.7	7.5	750	630	0.3	7.5

Depth of cut




- 1) When contour milling, cutting conditions can vary greatly due to the geometry of workpiece or the cutting method. Please reduce the feed rate especially at corners.
- 2) If the rigidity of the machine or the workpiece installation is very low, or chattering and noise are generated, please reduce the revolution and feed rate proportionately, or reduce the depth of cut.
- 3) Air blow or oil mist is strongly recommended for good chip evacuation.

Work material	Carbon steel, Alloy steel (-45HRC) Ck55, 070M55					Austenitic stainless steel X5CrNi18-10 X5CrNiMo17-12-2 Titanium alloy					Heat resistant alloy Inconel etc.				
	$\alpha \leq 15^\circ$		$\alpha > 15^\circ$		Depth of cut a_p (mm)	$\alpha \leq 15^\circ$		$\alpha > 15^\circ$		Depth of cut a_p (mm)	$\alpha \leq 15^\circ$		$\alpha > 15^\circ$		Depth of cut a_p (mm)
	Revolution (min^{-1})	Feed rate (mm/min)	Revolution (min^{-1})	Feed rate (mm/min)		Revolution (min^{-1})	Feed rate (mm/min)	Revolution (min^{-1})	Feed rate (mm/min)		Revolution (min^{-1})	Feed rate (mm/min)	Revolution (min^{-1})	Feed rate (mm/min)	
R 3	16000	4800	10600	2100	0.5	12000	3200	8000	1400	0.5	3200	500	2100	210	0.25
R 4	12000	4300	8000	1900	0.8	9000	3200	6000	1400	0.8	2400	430	1600	190	0.4
R 5	9600	4100	6400	1800	1	7200	3000	4800	1300	1	2000	420	1300	180	0.5
R 6	8000	4000	5300	1800	1.2	6000	3000	4000	1300	1.2	1700	350	1100	150	0.6
R 8	6000	3200	4000	1400	1.6	4500	2500	3000	1100	1.6	1200	300	800	130	0.8
R10	4800	3000	3200	1300	2	3600	2300	2400	1000	2	1000	250	640	100	1

Depth of cut	$\leq 0.5R$		$\leq 0.2R$	
	$\leq a_p$	$\leq a_p$	$\leq a_p$	$\leq a_p$

- 1) When cutting austenitic stainless steels, the use of water-soluble cutting fluid is effective. When cutting heat-resistant alloys, the use of non water-soluble cutting fluid is recommended.
- 2) If the depth of cut is shallow, the revolution and feed rate can be increased.
- 3) This end mill has a larger effect on controlling vibration when compared to standard end mills. However, if the rigidity of the machine or the workpiece installation is very low, then vibration can occur. In this case, please reduce the revolution and feed rate.
- 4) α is the inclination angle of the machined surface.

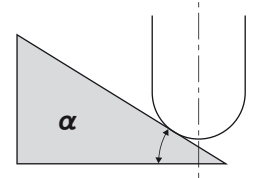

Cutting Performance

Excellent chip disposal!

VF45VB

Chip packing

2280 (fz=0.04mm/tooth) 3430 (fz=0.06mm/tooth) 4580 (fz=0.08mm/tooth) Feed rate (mm/min)

End mill	VF45VBR0500 (R5)
Work material	Titanium alloy
Revolution	14300 min^{-1}
Feed rate	2280-4580mm/min
Cutting fluid	Emulsion

Shoulder Milling

Work material	Carbon Steel, Alloy Steel (-30HRC) Ck55, 070M55 Cast iron GG25		Alloy Steel, Tool Steel Pre-hardened Steel (30-45HRC) W.Nr. 1.2344(H13)		Austenitic Stainless Steel X5CrNi18-10 X5CrNiMo17-12-2 Titanium alloy		Hardened Steel (45-55HRC) W.Nr. 1.2344(H13)		Heat Resistant Alloys Inconel	
	Dia. (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Revolution (min ⁻¹)	Feed rate (mm/min)	Revolution (min ⁻¹)	Feed rate (mm/min)	Revolution (min ⁻¹)	Feed rate (mm/min)	Revolution (min ⁻¹)
2	21000	1100	21000	1100	14000	560	9600	310	4800	130
3	15000	1250	15000	1250	10600	850	7400	380	4200	200
4	11000	1400	11000	1400	8000	960	5600	400	3200	220
5	9600	1920	9600	1920	6400	1020	4500	430	2500	250
6	8000	2240	8000	2240	5300	1060	3700	440	2100	250
7	6800	1900	6800	1900	4500	1010	3200	450	1800	260
8	6000	1680	6000	1680	4000	960	2800	450	1600	260
9	5300	1480	5300	1480	3500	840	2500	450	1400	220
10	4800	1440	4800	1440	3200	770	2200	440	1300	210
11	4400	1350	4400	1350	2900	760	2000	400	1200	190
12	4000	1250	4000	1250	2700	760	1900	380	1100	180
13	3700	1180	3700	1180	2500	700	1700	360	1000	160
14	3400	1160	3400	1160	2300	640	1600	350	900	140
16	3000	1140	3000	1140	2000	560	1400	340	800	130
18	2700	970	2700	970	1800	550	1200	340	700	110
20	2400	860	2400	860	1600	510	1100	330	600	100

D: Dia.

Slotting

Work material	Carbon Steel, Alloy Steel (-30HRC) Ck55, 070M55 Cast iron GG25		Alloy Steel, Tool Steel Pre-hardened Steel (30-45HRC) W.Nr. 1.2344(H13)		Austenitic Stainless Steel X5CrNi18-10 X5CrNiMo17-12-2 Titanium alloy		Hardened Steel (45-55HRC) W.Nr. 1.2344(H13)		Heat Resistant Alloys Inconel	
	Dia. (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Revolution (min ⁻¹)	Feed rate (mm/min)	Revolution (min ⁻¹)	Feed rate (mm/min)	Revolution (min ⁻¹)	Feed rate (mm/min)	Revolution (min ⁻¹)
2	17000	680	10000	400	9600	310	4800	130	3200	80
3	12000	720	6900	410	7400	380	3200	140	2700	110
4	9200	810	5600	490	5600	400	2400	150	2000	120
5	7600	1060	4500	630	4500	410	1900	170	1600	130
6	6400	1280	3700	740	3700	440	1600	190	1300	160
7	5500	1210	3200	700	3200	410	1400	190	1100	140
8	4800	1150	2800	670	2800	390	1200	190	1000	130
9	4200	1010	2500	600	2500	350	1100	180	900	130
10	3800	910	2200	530	2200	350	1000	160	800	130
11	3500	900	2000	530	2000	320	900	160	720	120
12	3200	900	1900	530	1900	300	800	160	660	110
13	2900	810	1700	480	1700	290	730	150	610	100
14	2700	760	1600	450	1600	290	680	140	570	90
16	2400	670	1400	390	1400	280	600	120	500	80
18	2100	670	1200	380	1200	270	530	120	440	70
20	1900	610	1100	350	1100	260	480	120	400	60

D: Dia.

- 1) When cutting austenitic stainless steels, the use of water-soluble cutting fluid is effective. When cutting heat-resistant alloys, the use of non water-soluble cutting fluid is recommended.
- 2) If the depth of cut is shallow, the revolution and feed rate can be increased.
- 3) The irregular helix flute end mill has a larger effect on controlling the vibrations when compared to standard end mills. However, if the rigidity of the machine or the workpiece installation is very low, then vibration can occur. In this case, please reduce the revolution and feed rate proportionately, or set the depth of cut smaller.
- 4) For shoulder milling, climb cutting is recommended.






IMPACT MIRACLE END MILLS

VFJHV NEW

End mill, Semi long cut length, 4 flute, Irregular helix flutes

Shoulder Milling

Work material	Carbon Steel, Alloy Steel (-30HRC) Ck55, 070M55 Cast iron GG25		Alloy Steel, Tool Steel Pre-hardened Steel (30-45HRC) W.Nr. 1.2344(H13)		Austenitic Stainless Steel X5CrNi18-10 X5CrNiMo17-12-2 Titanium alloy		Hardened Steel (45-55HRC) W.Nr. 1.2344(H13)		Heat Resistant Alloys Inconel	
	Dia. (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Revolution (min ⁻¹)	Feed rate (mm/min)	Revolution (min ⁻¹)	Feed rate (mm/min)	Revolution (min ⁻¹)	Feed rate (mm/min)	Revolution (min ⁻¹)
2	16000	530	10000	320	10000	300	7400	140	3800	55
3	12000	820	7600	470	7600	440	5600	280	2500	80
4	9500	950	6000	520	6000	510	4500	310	1900	110
5	7600	1000	4800	550	4800	540	3600	330	1500	110
6	6300	1100	4000	610	4000	600	3000	330	1300	110
8	4700	1100	3000	630	3000	600	2200	330	960	100
10	3800	1000	2400	610	2400	570	1800	310	760	100
12	3100	980	2000	580	2000	520	1500	280	640	80
16	2300	810	1500	480	1500	420	1100	240	480	65
20	1900	740	1200	430	1200	390	900	220	380	50

Depth of cut	Carbon Steel, Alloy Steel (-30HRC) Ck55, 070M55 Cast iron GG25		Alloy Steel, Tool Steel Pre-hardened Steel (30-45HRC) W.Nr. 1.2344(H13)		Austenitic Stainless Steel X5CrNi18-10 X5CrNiMo17-12-2 Titanium alloy		Hardened Steel (45-55HRC) W.Nr. 1.2344(H13)		Heat Resistant Alloys Inconel	
										

D: Dia.

- 1) When cutting austenitic stainless steels, the use of water-soluble cutting fluid is effective. When cutting heat-resistant alloys, the use of non water-soluble cutting fluid is recommended.
- 2) The irregular helix flute end mill has a larger effect on controlling vibrations when compared to standard end mills. However, if the rigidity of the machine or the workpiece installation is very low, then vibration can occur. In this case, please reduce the revolution and feed rate proportionately.
- 3) Climb cutting is recommended.

IMPACT MIRACLE END MILLS

VF6MHV

End mill, Medium cut length, 6 flute, Irregular helix flutes

VF6MHVRB

Corner radius end mill, Medium cut length, 6 flute, Irregular helix flutes

Shoulder Milling

Work material	Carbon Steel, Alloy Steel (-30HRC) Ck55, 070M55 Cast iron GG25		Austenitic Stainless Steel X5CrNi18-10 X5CrNiMo17-12-2 Titanium alloy		Heat Resistant Alloys Inconel	
	Dia. (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Revolution (min ⁻¹)	Feed rate (mm/min)	Revolution (min ⁻¹)
6	10600	2900	8000	2000	2100	320
8	8000	2900	6000	2000	1600	300
10	6400	2700	4800	2000	1300	260
12	5300	2700	4000	2000	1100	230
16	4000	2200	3000	1600	800	180
20	3200	1900	2400	1400	640	150
Depth of cut						

D : Dia.

- 1) When cutting austenitic stainless steels, the use of water-soluble cutting fluid is effective. When cutting heat-resistant alloys, the use of non water-soluble cutting fluid is recommended.
- 2) If the depth of cut is shallow, the revolution and feed rate can be increased.
- 3) The irregular helix flute end mill has a larger effect on controlling the vibrations when compared to standard end mills. However, if the rigidity of the machine or the workpiece installation is very low, then vibration can occur. In this case, please reduce the revolution and feed rate proportionately, or set the depth of cut smaller.
- 4) Climb cutting is recommended.

IMPACT MIRACLE END MILLS

VF2MV

2 flute, Medium cut length, Irregular helix flutes

VF4MV

4 flute, Medium cut length, Irregular helix flutes

VF2MV

Work material	Carbon Steel, Alloy Steel, Tool Steel Pre-hardened Steel (-45HRC) W.Nr. 1.2344(H13)			Hardened Steel (45-55HRC) W.Nr. 1.2344(H13)			Hardened Steel (55HRC-)		
	Dia. (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)
0.5	40000	1000	0.015	40000	960	0.015	30000	600	0.01
1	40000	2000	0.06	32000	1600	0.06	16000	550	0.05
1.5	40000	3000	0.12	32000	1900	0.08	10600	500	0.08
2	30000	3000	0.18	24000	1900	0.10	8100	400	0.1
2.5	24000	2600	0.25	19000	1600	0.13	6400	350	0.13
3	20000	2300	0.30	16000	1400	0.15	5400	300	0.15
4	15000	2000	0.40	12000	1200	0.20	4000	240	0.2
5	12000	1600	0.50	9000	900	0.25	3200	190	0.2
6	10000	1400	0.60	7000	700	0.30	2700	160	0.2

Depth of cut

≤ Please refer to the list above for depth of cut.

D: Dia.

- 1) The irregular helix flute end mill has a larger effect on controlling vibration when compared to standard end mills. However, if the rigidity of the machine or the workpiece installation is very low, then vibration can occur. In this case, please reduce the revolution and feed rate proportionately, or set a lower depth of cut.
- 2) When slotting, reduce the revolutions by 20 - 50% and the feed rate by 40 - 60%.
- 3) For austenitic stainless steels, titanium and heat-resistant alloys, VF2MV is recommended.

VF4MV


Work material	Carbon Steel, Alloy Steel, Tool Steel Pre-hardened Steel (-45HRC) W.Nr. 1.2344(H13)			Hardened Steel (45-55HRC) W.Nr. 1.2344(H13)			Hardened Steel (55HRC-)		
	Dia. (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)
6	10000	2100	0.60	7000	1400	0.30	2700	320	0.20
8	8000	1500	0.80	5600	1100	0.40	2000	240	0.20
10	6400	1400	1.00	4500	950	0.50	1600	210	0.30
12	5400	1200	1.00	3800	860	0.50	1300	160	0.30
16	2400	550	3.00	1200	280	0.80	1000	130	0.30
20	1900	480	4.00	1000	240	1.00	800	100	0.30

Depth of cut

≤ Please refer to the list above for depth of cut.

D: Dia.

- 1) The irregular helix flute end mill has a larger effect on controlling vibration when compared to standard end mills. However, if the rigidity of the machine or the workpiece installation is very low, then vibration can occur. In this case, please reduce the revolution and feed rate proportionately, or set a lower depth of cut.
- 2) When slotting, reduce the revolutions by 20 - 50% and the feed rate by 40 - 60%.
- 3) For austenitic stainless steels, titanium and heat-resistant alloys, VF4MV is recommended.

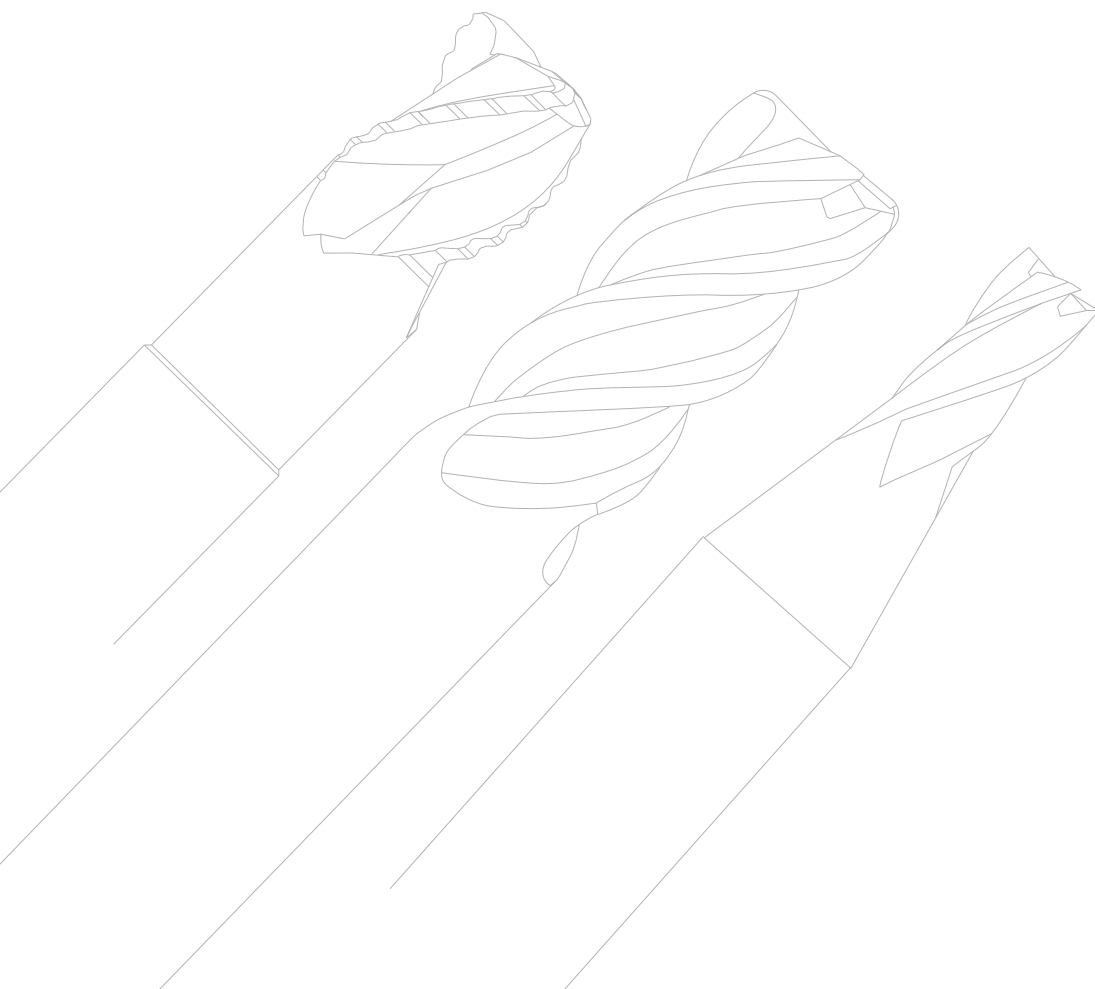

www.mitsubishicarbide.com

MMC HARTMETALL GmbH

Comeniusstr. 2, 40670 Meerbusch Germany
Tel. +49-2159-9189-0 Fax +49-2159-918966
e-mail admin@mmchg.de

MMC HARDMETAL U.K. LTD.

Mitsubishi House, Galena Close, Tamworth, Staffs. B77 4AS, U.K.
Tel. +44-1827-312312 Fax +44-1827-312314
e-mail sales@mitsubishicarbide.co.uk

MMC METAL FRANCE s.a.r.l.

6, Rue Jacques Monod, 91400 Orsay, France
Tel. +33-1-69 35 53 53 Fax +33-1-69 35 53 50
e-mail mmfsales@mmc-metal-france.fr

MITSUBISHI MATERIALS ESPAÑA, S.A.

Calle Emperador 2, 46136 Museros/Valencia, Spain
Tel. +34-96-144-1711 Fax +34-96-144-3786
e-mail mme@mmevalencia.com

MMC ITALIA S.r.l.

Viale Delle Industrie, 2 20020 Arese, Italy
Tel. +39-02 93 77 03 1 Fax +39-02 93 58 90 93
e-mail info@mmc-italia.it

MMC HARDMETAL POLAND SP. z o.o.

Al. Armii Krajowej 61, 50-541 Wrocław, Poland
Tel. +48-71335-16-20 Fax +48-71335-16-21
e-mail sales@mitsubishicarbide.com.pl

MMC HARDMETAL RUSSIA OOO LTD.

B. Semenovskaya Dom 11 /5 107023 Moscow, Russia
Tel. +7-495-72558-85 Fax +7-495-98139-73
e-mail mmc@carbide.ru