

415SD

FIRST CHOICE FOR HIGH-FEED MACHINING OF
TITANIUM ALLOYS



Mplus...

415SD

FOR HIGH-FEED EFFICIENT MACHINING



HIGH-FEED MILLING CUTTER CONCEPT FOR STABILITY AND HIGH PERFORMANCE

- Unevenly spaced cutting edges reduce vibrations, especially in long overhang applications.
- Fine and extra fine pitch types enable a highly efficient cutting performance.
- Carefully selected steel for the tool body is capable of safely absorbing machining forces. In addition, the nickel coating increases wear and corrosion protection.
- The insert location in the holder combined with the ideal geometry and a precisely positioned coolant outlet achieves maximum stability and machining performance.

CUTTING PERFORMANCE

The approach angle of 15° achieves an APMX of 2 mm, which enables a high removal rate but with low radial forces.

TARGETED APPLICATIONS

The use of different diameters and the precise positioning of the coolant nozzles enables perfect chip removal as well as reducing and dissipating the high temperatures that occur at the cutting edge.

SAFE, PRECISE AND RELIABLE

Exact positioning, secure insert clamping with large contact surfaces offers the possibility of high-performance and efficient high-feed machining of stainless steels and heat resistant materials.



415SD

INSERTS FOR HIGH-FEED EFFICIENT MACHINING

THE PVD-COATED, HIGH-PERFORMANCE GRADE MP9130 FOCUSES ON TITANIUM MACHINING

- High-feed face milling including radial, plunge and ramping operations.
- Ideal for machining components that require a long overhang.
- Highly suitable for low power machines and low rigidity component clamping.



L-BREAKER

Ideal for applications that require low cutting resistance.



M-BREAKER

First recommendation - ideal combination of cutting edge stability and low cutting resistance.



R-BREAKER

High cutting edge stability, for heavy interrupted machining or difficult cutting conditions.



415SD



HIGH-FEED CUTTER


P K S



415SD

GAMP: 9°
GAMF: 5° – 6°

1

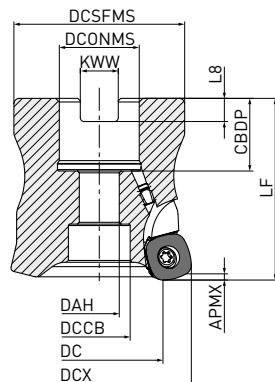

DCX	Set bolt	Geometry
Ø 50, Ø 52	HSC10035	
Ø 63, Ø 66	HSC12035	1

Right hand tool holder only.

ARBOR TYPE

Order number	Stock	APMX	DC	DCONMS	DCX	LF	RMPX	WT	ZEFP	Type	SDMT12
415SD-050A04AR-E	●	2	33.4	22	50	50	3°	0.4	4	●	1
415SD-050A05AR-E	●	2	33.4	22	50	50	3°	0.4	5	●	1
415SD-052A04AR-E	●	2	35.4	22	52	50	3°	0.4	4	●	1
415SD-052A06AR-E	●	2	35.4	22	52	50	3°	0.4	6	●	1
415SD-063X05AR-E	●	2	46.5	27	63	50	2°	0.7	5	●	1
415SD-063X07AR-E	●	2	46.5	27	63	50	2°	0.7	7	●	1
415SD-066X05AR-E	●	2	49.4	27	66	50	1.9°	0.7	5	●	1
415SD-066X07AR-E	●	2	49.4	27	66	50	1.9°	0.7	7	●	1

1/1

1. Please refer to page 7, for maximum depth of cut (APMX).



415SD



HIGH-FEED CUTTER


MOUNTING DIMENSIONS

Order number	CBDP	DAH	DCCB	DCONMS	DCSFMS	DCX	KWW	L8	Type
415SD-050A04AR-E	20	11	17	22	47	50	10.4	6.3	1
415SD-050A05AR-E	20	11	17	22	47	50	10.4	6.3	1
415SD-052A04AR-E	20	11	17	22	47	52	10.4	6.3	1
415SD-052A06AR-E	20	11	17	22	47	52	10.4	6.3	1
415SD-063X05AR-E	22	13	19	27	60	63	12.4	7.0	1
415SD-063X07AR-E	22	13	19	27	60	63	12.4	7.0	1
415SD-066X05AR-E	22	13	19	27	60	66	12.4	7.0	1
415SD-066X07AR-E	22	13	19	27	60	66	12.4	7.0	1

1/1

INSERTS

Order number	Class	MP9130	NEW MV1020	NEW MV1030	IC	S	RE	Shape
SDMT125530ZEN-L	L	●	●	●	12.25	5.56	3.0	
SDMT125530ZEN-M	M	●	●	●	12.25	5.56	3.0	
SDMT125530ZSN-R	R	●	●	●	12.25	5.56	3.0	

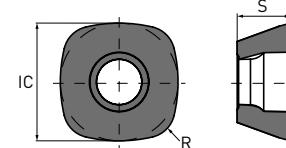

1/1

415SD



HIGH-FEED CUTTER

SPARE PARTS

Tool holder						
	Clamp screw	Flag wrench	Coolant nozzle	Standard L wrench	Anti-seize lubricant	
415SD	TPS43	TIP15W-E	HSD04004H12	HKY20R	MK1KS	

1. Clamp torque [N • m]: TPS43 = 3.5

COOLANT NOZZLES ARE AVAILABLE WITH VARYING DIAMETERS FOR ADJUSTING COOLANT PRESSURE

← Standard →			
	≤ 1 Mpa (≤ 20 l/min.)	≥ 3 Mpa (≥ 25 l/min.)	≥ 5 Mpa (≥ 30 l/min.)
Nozzle Dia.	Ø 0.6 mm	Ø 0.8 mm	Ø 1.2 mm
Order number	HSD04004H06	HSD04004H08	HSD04004H12
			HSD04004H16

415SD

RECOMMENDED CUTTING CONDITIONS

CORRECTION FACTOR BY OVERHANG LENGTH

DCX	Overhang length	Adjustment value		
		Vc	ap	fz
Arbor type 50–66	<2.5xDCX	100%	100%	100%
	3.0xDCX	85%	100%	90%
	4.0xDCX	80%	80%	80%
	5.0xDCX	75%	75%	60%
	6.0xDCX	70%	70%	40%

CUTTING SPEED/WET CUTTING

Material	Properties	Cutting conditions	Grade	APMX	Vc		
					ae ≤ 0.5 DC	ae ≤ 0.75 DC	ae = DC
S Titanium alloy	—	● ● ✨	MP9130	≤ 1	55 (40 – 70)	50 (35 – 65)	45 (30 – 60)
			MP9130	≤ 2	55 (40 – 70)	50 (35 – 65)	45 (30 – 60)

1/1

NEW

CUTTING SPEED/DRY CUTTING

Material	Properties	Cutting conditions	Grade	APMX	Vc		
					ae ≤ 0.5 DC	ae ≤ 0.75 DC	ae = DC
P Mild steel	< 180 HB	● ● ✨	MV1020	≤ 2	220 (170 – 270)	220 (170 – 270)	220 (170 – 270)
			MV1030	≤ 2	140 (80 – 200)	140 (80 – 200)	140 (80 – 200)
Carbon steel, Alloy steel	180 – 280 HB	● ● ✨	MV1020	≤ 2	200 (150 – 250)	200 (150 – 250)	200 (150 – 250)
			MV1030	≤ 2	120 (60 – 180)	120 (60 – 180)	120 (60 – 180)
	280 – 350 HB	● ● ✨	MV1020	≤ 2	150 (100 – 200)	150 (100 – 200)	150 (100 – 200)
			MV1030	≤ 2	90 (30 – 150)	90 (30 – 150)	90 (30 – 150)
K Ductile cast iron	Tensile strength < 450 MPa	● ● ✨	MV1020	≤ 2	200 (150 – 250)	200 (150 – 250)	200 (150 – 250)
	Tensile strength < 800 MPa	● ● ✨	MV1030	≤ 2	140 (80 – 200)	140 (80 – 200)	140 (80 – 200)
			MV1020	≤ 2	180 (130 – 230)	180 (130 – 230)	180 (130 – 230)
			MV1030	≤ 2	140 (80 – 200)	140 (80 – 200)	140 (80 – 200)

1/1

NEW

415SD

RECOMMENDED CUTTING CONDITIONS

DEPTH OF CUT/FEED PER TOOTH

Material	Properties	Cutting conditions	Coolant	Grade	ae ≤ 0.5 DC		ae ≤ 0.75 DC		ae = DC	
						ap		ap		ap
P Mild steel	≤ 180 HB	●	✗	MV1020	L	≤ 1	0.9 [0.4 – 1.2]	L	≤ 1	0.8 [0.4 – 1.1]
		●	✗	MV1030	L	≤ 1	0.9 [0.4 – 1.2]	L	≤ 1	0.8 [0.4 – 1.1]
		●	✗	MV1020	L	≤ 2	0.8 [0.4 – 1.2]	L	≤ 2	0.7 [0.4 – 1.1]
		●	✗	MV1030	L	≤ 2	0.8 [0.4 – 1.2]	L	≤ 2	0.7 [0.4 – 1.0]
		●	✗	MV1020	L	≤ 1	—	L	≤ 1	—
		●	✗	MV1030	L	≤ 1	—	L	≤ 1	—
		●	✗	MV1020	L	≤ 2	—	L	≤ 2	—
		●	✗	MV1030	L	≤ 2	—	L	≤ 2	—
		●	✗	MV1020	M	≤ 1	1.2 [0.4 – 1.8]	M	≤ 1	1.1 [0.4 – 1.6]
		●	✗	MV1030	M	≤ 1	1.2 [0.4 – 1.8]	M	≤ 1	1.1 [0.4 – 1.6]
		●	✗	MV1020	M	≤ 2	1.1 [0.4 – 1.8]	M	≤ 2	1.0 [0.4 – 1.6]
		●	✗	MV1030	M	≤ 2	1.1 [0.4 – 1.8]	M	≤ 2	1.0 [0.4 – 1.6]
		●	✗	MV1020	M	≤ 1	1.0 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]
		●	✗	MV1030	M	≤ 1	1.0 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]
		●	✗	MV1020	M	≤ 2	0.9 [0.4 – 1.7]	M	≤ 2	0.9 [0.4 – 1.5]
		●	✗	MV1030	M	≤ 2	0.9 [0.4 – 1.7]	M	≤ 2	0.9 [0.4 – 1.5]
		●	✗	MV1020	M	≤ 1	1.0 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]
		●	✗	MV1030	M	≤ 1	1.0 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]
		●	✗	MV1020	M	≤ 2	0.9 [0.4 – 1.7]	M	≤ 2	0.9 [0.4 – 1.5]
		●	✗	MV1030	M	≤ 2	0.9 [0.4 – 1.7]	M	≤ 2	0.9 [0.4 – 1.5]
		●	✗	MV1020	R	≤ 1	1.5 [0.4 – 2.1]	R	≤ 1	1.4 [0.4 – 1.9]
		●	✗	MV1030	R	≤ 1	1.5 [0.4 – 2.1]	R	≤ 1	1.4 [0.4 – 1.9]
		●	✗	MV1020	R	≤ 2	1.4 [0.4 – 2.1]	R	≤ 2	1.3 [0.4 – 1.9]
		●	✗	MV1030	R	≤ 2	1.4 [0.4 – 2.1]	R	≤ 2	1.3 [0.4 – 1.9]
		●	✗	MV1020	R	≤ 1	1.4 [0.4 – 2.0]	R	≤ 1	1.2 [0.4 – 1.8]
		●	✗	MV1030	R	≤ 1	1.4 [0.4 – 2.0]	R	≤ 1	1.2 [0.4 – 1.8]
		●	✗	MV1020	R	≤ 2	1.3 [0.4 – 2.0]	R	≤ 2	1.1 [0.4 – 1.8]
		●	✗	MV1030	R	≤ 2	1.3 [0.4 – 2.0]	R	≤ 2	1.1 [0.4 – 1.8]
		●	✗	MV1020	R	≤ 1	1.4 [0.4 – 2.0]	R	≤ 1	1.2 [0.4 – 1.7]
		●	✗	MV1030	R	≤ 1	1.4 [0.4 – 2.0]	R	≤ 1	1.2 [0.4 – 1.7]
		●	✗	MV1020	R	≤ 2	1.3 [0.4 – 2.0]	R	≤ 2	1.1 [0.4 – 1.7]
		●	✗	MV1030	R	≤ 2	1.3 [0.4 – 2.0]	R	≤ 2	1.1 [0.4 – 1.7]

1/5

415SD – DEPTH OF CUT/FEED PER TOOTH

Material	Properties	Cutting conditions	Grade	ae ≤ 0.5 DC		ae ≤ 0.75 DC		ae = DC			
				Coolant	ap	fz	ap	fz	ap	fz	
P Carbon steel, Alloy steel	180 – 280 HB	●  MV1020	L	≤ 1	0.7 [0.4 – 1.1]		≤ 1	0.7 [0.4 – 1.0]	L	≤ 1	0.7 [0.4 – 1.0]
		●  MV1030	L	≤ 1	0.7 [0.4 – 1.1]		≤ 1	0.7 [0.4 – 1.0]	L	≤ 1	0.7 [0.4 – 1.0]
		●  MV1020	L	≤ 2	—		≤ 2	—	L	≤ 2	—
		●  MV1030	L	≤ 2	—		≤ 2	—	L	≤ 2	—
		●  MV1020	L	≤ 1	—		≤ 1	—	L	≤ 1	—
		●  MV1030	L	≤ 1	—		≤ 1	—	L	≤ 1	—
		●  MV1020	L	≤ 2	—		≤ 2	—	L	≤ 2	—
		●  MV1030	L	≤ 2	—		≤ 2	—	L	≤ 2	—
		●  MV1020	M	≤ 1	1.0 [0.4 – 1.7]		≤ 1	1.0 [0.4 – 1.5]	M	≤ 1	1.0 [0.4 – 1.5]
		●  MV1030	M	≤ 1	1.0 [0.4 – 1.7]		≤ 1	1.0 [0.4 – 1.5]	M	≤ 1	1.0 [0.4 – 1.5]
		●  MV1020	M	≤ 2	0.9 [0.4 – 1.7]		≤ 2	0.9 [0.4 – 1.5]	M	≤ 2	0.9 [0.4 – 1.5]
		●  MV1030	M	≤ 2	0.9 [0.4 – 1.7]		≤ 2	0.9 [0.4 – 1.5]	M	≤ 2	0.9 [0.4 – 1.5]
		●  MV1020	M	≤ 1	0.9 [0.4 – 1.5]		≤ 1	0.8 [0.4 – 1.4]	M	≤ 1	0.8 [0.4 – 1.3]
		●  MV1030	M	≤ 1	0.9 [0.4 – 1.5]		≤ 1	0.8 [0.4 – 1.4]	M	≤ 1	0.8 [0.4 – 1.3]
		●  MV1020	M	≤ 2	0.8 [0.4 – 1.5]		≤ 2	0.7 [0.4 – 1.4]	M	≤ 2	0.7 [0.4 – 1.3]
		●  MV1030	M	≤ 2	0.8 [0.4 – 1.5]		≤ 2	0.7 [0.4 – 1.4]	M	≤ 2	0.7 [0.4 – 1.3]
		●  MV1020	M	≤ 1	0.9 [0.4 – 1.5]		≤ 1	0.8 [0.4 – 1.4]	M	≤ 1	0.8 [0.4 – 1.3]
		●  MV1030	M	≤ 1	0.9 [0.4 – 1.5]		≤ 1	0.8 [0.4 – 1.4]	M	≤ 1	0.8 [0.4 – 1.3]
		●  MV1020	M	≤ 2	0.8 [0.4 – 1.5]		≤ 2	0.7 [0.4 – 1.4]	M	≤ 2	0.7 [0.4 – 1.3]
		●  MV1030	M	≤ 2	0.8 [0.4 – 1.5]		≤ 2	0.7 [0.4 – 1.4]	M	≤ 2	0.7 [0.4 – 1.3]
		●  MV1020	R	≤ 1	1.4 [0.4 – 2.0]		≤ 1	1.2 [1.0 – 1.8]	R	≤ 1	1.2 [0.4 – 1.7]
		●  MV1030	R	≤ 1	1.4 [0.4 – 2.0]		≤ 1	1.2 [1.0 – 1.8]	R	≤ 1	1.2 [0.4 – 1.7]
		●  MV1020	R	≤ 2	1.3 [0.4 – 2.0]		≤ 2	1.1 [1.0 – 1.8]	R	≤ 2	1.1 [0.4 – 1.7]
		●  MV1030	R	≤ 2	1.3 [0.4 – 2.0]		≤ 2	1.1 [1.0 – 1.8]	R	≤ 2	1.1 [0.4 – 1.7]
		●  MV1020	R	≤ 1	1.2 [0.4 – 1.8]		≤ 1	1.1 [0.8 – 1.6]	R	≤ 1	1.1 [0.4 – 1.6]
		●  MV1030	R	≤ 1	1.2 [0.4 – 1.8]		≤ 1	1.1 [0.8 – 1.6]	R	≤ 1	1.1 [0.4 – 1.6]
		●  MV1020	R	≤ 2	1.1 [0.4 – 1.8]		≤ 2	1.0 [0.8 – 1.6]	R	≤ 2	1.0 [0.4 – 1.6]
		●  MV1030	R	≤ 2	1.1 [0.4 – 1.8]		≤ 2	1.0 [0.8 – 1.6]	R	≤ 2	1.0 [0.4 – 1.6]
		●  MV1020	R	≤ 1	1.2 [0.4 – 1.8]		≤ 1	1.1 [0.8 – 1.6]	R	≤ 1	1.1 [0.4 – 1.6]
		●  MV1030	R	≤ 1	1.2 [0.4 – 1.8]		≤ 1	1.1 [0.8 – 1.6]	R	≤ 1	1.1 [0.4 – 1.6]
		●  MV1020	R	≤ 2	1.1 [0.4 – 1.8]		≤ 2	1.0 [0.8 – 1.6]	R	≤ 2	1.0 [0.4 – 1.6]
		●  MV1030	R	≤ 2	1.1 [0.4 – 1.8]		≤ 2	1.0 [0.8 – 1.6]	R	≤ 2	1.0 [0.4 – 1.6]

2/5

NEW**415SD – DEPTH OF CUT/FEED PER TOOTH**

Material	Properties	Cutting conditions	Grade	ae ≤ 0.5 DC		ae ≤ 0.75 DC		ae = DC			
				Coolant	ap	fz	ap	fz	ap	fz	
P Carbon steel, Alloy steel	280 – 350 HB	●  MV1020	L	≤1	0.6 [0.4 – 0.9]	L	≤1	0.6 [0.4 – 0.8]	L	≤1	0.6 [0.4 – 0.8]
		●  MV1030	L	≤1	0.6 [0.4 – 0.9]	L	≤1	0.6 [0.4 – 0.8]	L	≤1	0.6 [0.4 – 0.8]
		●  MV1020	L	≤2	0.5 [0.4 – 0.9]	L	≤2	0.5 [0.4 – 0.8]	L	≤2	0.5 [0.4 – 0.8]
		●  MV1030	L	≤2	0.5 [0.4 – 0.9]	L	≤2	0.5 [0.4 – 0.8]	L	≤2	0.5 [0.4 – 0.8]
		●  MV1020	L	≤1	—	L	≤1	—	L	≤1	—
		●  MV1030	L	≤1	—	L	≤1	—	L	≤1	—
		●  MV1020	L	≤2	—	L	≤2	—	L	≤2	—
		●  MV1030	L	≤2	—	L	≤2	—	L	≤2	—
		●  MV1020	M	≤1	0.9 [0.4 – 1.5]	M	≤1	0.8 [0.4 – 1.4]	M	≤1	0.8 [0.4 – 1.3]
		●  MV1030	M	≤1	0.9 [0.4 – 1.5]	M	≤1	0.8 [0.4 – 1.4]	M	≤1	0.8 [0.4 – 1.3]
		●  MV1020	M	≤2	0.8 [0.4 – 1.5]	M	≤2	0.7 [0.4 – 1.4]	M	≤2	0.7 [0.4 – 1.3]
		●  MV1030	M	≤2	0.8 [0.4 – 1.5]	M	≤2	0.7 [0.4 – 1.4]	M	≤2	0.7 [0.4 – 1.3]
		●  MV1020	M	≤1	0.9 [0.4 – 1.5]	M	≤1	0.8 [0.4 – 1.4]	M	≤1	0.7 [0.4 – 1.2]
		●  MV1030	M	≤1	0.9 [0.4 – 1.5]	M	≤1	0.8 [0.4 – 1.4]	M	≤1	0.7 [0.4 – 1.2]
		●  MV1020	M	≤2	0.8 [0.4 – 1.5]	M	≤2	0.7 [0.4 – 1.4]	M	≤2	0.6 [0.4 – 1.2]
		●  MV1030	M	≤2	0.8 [0.4 – 1.5]	M	≤2	0.7 [0.4 – 1.4]	M	≤2	0.6 [0.4 – 1.2]
		●  MV1020	M	≤1	0.9 [0.4 – 1.5]	M	≤1	0.8 [0.4 – 1.4]	M	≤1	0.7 [0.4 – 1.2]
		●  MV1030	M	≤2	0.8 [0.4 – 1.5]	M	≤2	0.7 [0.4 – 1.4]	M	≤2	0.6 [0.4 – 1.2]
		●  MV1020	M	≤1	0.9 [0.4 – 1.5]	M	≤1	0.8 [0.4 – 1.4]	M	≤1	0.7 [0.4 – 1.2]
		●  MV1030	M	≤2	0.8 [0.4 – 1.5]	M	≤2	0.7 [0.4 – 1.4]	M	≤2	0.6 [0.4 – 1.2]
		●  MV1020	R	≤1	1.2 [0.4 – 1.8]	R	≤1	1.1 [0.4 – 1.6]	R	≤1	1.1 [0.8 – 1.6]
		●  MV1030	R	≤1	1.2 [0.4 – 1.8]	R	≤1	1.1 [0.4 – 1.6]	R	≤1	1.1 [0.8 – 1.6]
		●  MV1020	R	≤2	1.1 [0.4 – 1.8]	R	≤2	1.0 [0.4 – 1.6]	R	≤2	1.0 [0.8 – 1.6]
		●  MV1030	R	≤2	1.1 [0.4 – 1.8]	R	≤2	1.0 [0.4 – 1.6]	R	≤2	1.0 [0.8 – 1.6]
		●  MV1020	R	≤1	1.1 [0.4 – 1.8]	R	≤1	1.0 [0.4 – 1.6]	R	≤1	1.0 [0.4 – 1.5]
		●  MV1030	R	≤1	1.1 [0.4 – 1.8]	R	≤1	1.0 [0.4 – 1.6]	R	≤1	1.0 [0.4 – 1.5]
		●  MV1020	R	≤2	1.0 [0.4 – 1.8]	R	≤2	0.9 [0.4 – 1.6]	R	≤2	0.9 [0.4 – 1.5]
		●  MV1030	R	≤1	1.1 [0.4 – 1.8]	R	≤1	1.0 [0.4 – 1.6]	R	≤1	1.0 [0.4 – 1.5]
		●  MV1020	R	≤2	1.0 [0.4 – 1.8]	R	≤2	0.9 [0.4 – 1.6]	R	≤2	0.9 [0.4 – 1.5]
		●  MV1030	R	≤2	1.0 [0.4 – 1.8]	R	≤2	0.9 [0.4 – 1.6]	R	≤2	0.9 [0.4 – 1.5]

3/5

415SD – DEPTH OF CUT/FEED PER TOOTH

Material	Properties	Cutting conditions	Grade	ae ≤ 0.5 DC		ae ≤ 0.75 DC		ae = DC			
					ap fz		ap fz		ap fz		
K	Ductile cast iron Tensile strength ≤ 350 MPa	●  MV1020	L	≤ 1	0.9 [0.4 – 1.2]	L	≤ 1	0.8 [0.4 – 1.1]	L	≤ 1	0.8 [0.4 – 1.1]
		●  MV1030	L	≤ 1	0.9 [0.4 – 1.2]	L	≤ 1	0.8 [0.4 – 1.1]	L	≤ 1	0.8 [0.4 – 1.1]
		●  MV1020	L	≤ 2	0.8 [0.4 – 1.2]	L	≤ 2	0.7 [0.4 – 1.1]	L	≤ 2	0.7 [0.4 – 1.1]
		●  MV1030	L	≤ 2	0.8 [0.4 – 1.2]	L	≤ 2	0.7 [0.4 – 1.1]	L	≤ 2	0.7 [0.4 – 1.1]
		●  MV1020	L	≤ 1	—	L	≤ 1	—	L	≤ 1	—
		●  MV1030	L	≤ 1	—	L	≤ 1	—	L	≤ 1	—
		●  MV1020	L	≤ 2	—	L	≤ 2	—	L	≤ 2	—
		●  MV1030	L	≤ 2	—	L	≤ 2	—	L	≤ 2	—
		●  MV1020	M	≤ 1	1.2 [0.4 – 1.8]	M	≤ 1	1.1 [0.4 – 1.6]	M	≤ 1	1.1 [0.4 – 1.6]
		●  MV1030	M	≤ 1	1.2 [0.4 – 1.8]	M	≤ 1	1.1 [0.4 – 1.6]	M	≤ 1	1.1 [0.4 – 1.6]
		●  MV1020	M	≤ 2	1.1 [0.4 – 1.8]	M	≤ 2	1.0 [0.4 – 1.6]	M	≤ 2	1.0 [0.4 – 1.6]
		●  MV1030	M	≤ 2	1.1 [0.4 – 1.8]	M	≤ 2	1.0 [0.4 – 1.6]	M	≤ 2	1.0 [0.4 – 1.6]
		●  MV1020	M	≤ 1	1.1 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]	M	≤ 1	0.9 [0.4 – 1.5]
		●  MV1030	M	≤ 1	1.1 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]	M	≤ 1	0.9 [0.4 – 1.5]
		●  MV1020	M	≤ 2	1.0 [0.4 – 1.7]	M	≤ 2	0.9 [0.4 – 1.5]	M	≤ 2	0.8 [0.4 – 1.5]
		●  MV1030	M	≤ 2	1.0 [0.4 – 1.7]	M	≤ 2	0.9 [0.4 – 1.5]	M	≤ 2	0.8 [0.4 – 1.5]
		●  MV1020	M	≤ 1	1.1 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]	M	≤ 1	0.9 [0.4 – 1.5]
		●  MV1030	M	≤ 1	1.1 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]	M	≤ 1	0.9 [0.4 – 1.5]
		●  MV1020	M	≤ 2	1.0 [0.4 – 1.7]	M	≤ 2	0.9 [0.4 – 1.5]	M	≤ 2	0.8 [0.4 – 1.5]
		●  MV1030	M	≤ 2	1.0 [0.4 – 1.7]	M	≤ 2	0.9 [0.4 – 1.5]	M	≤ 2	0.8 [0.4 – 1.5]
		●  MV1020	R	≤ 1	1.5 [0.4 – 2.1]	R	≤ 1	1.4 [0.4 – 1.9]	R	≤ 1	1.3 [1.1 – 1.9]
		●  MV1030	R	≤ 1	1.5 [0.4 – 2.1]	R	≤ 1	1.4 [0.4 – 1.9]	R	≤ 1	1.3 [1.1 – 1.9]
		●  MV1020	R	≤ 2	1.4 [0.4 – 2.1]	R	≤ 2	1.3 [0.4 – 1.9]	R	≤ 2	1.2 [1.1 – 1.9]
		●  MV1030	R	≤ 2	1.4 [0.4 – 2.1]	R	≤ 2	1.3 [0.4 – 1.9]	R	≤ 2	1.2 [1.1 – 1.9]
		●  MV1020	R	≤ 1	1.4 [1.0 – 2.0]	R	≤ 1	1.2 [0.4 – 1.8]	R	≤ 1	1.2 [0.4 – 1.7]
		●  MV1030	R	≤ 1	1.4 [1.0 – 2.0]	R	≤ 1	1.2 [0.4 – 1.8]	R	≤ 1	1.2 [0.4 – 1.7]
		●  MV1020	R	≤ 2	1.3 [1.0 – 2.0]	R	≤ 2	1.1 [0.4 – 1.8]	R	≤ 2	1.1 [0.4 – 1.7]
		●  MV1030	R	≤ 1	1.4 [1.0 – 2.0]	R	≤ 1	1.2 [0.4 – 1.8]	R	≤ 1	1.2 [0.4 – 1.7]
		●  MV1020	R	≤ 2	1.3 [1.0 – 2.0]	R	≤ 2	1.1 [0.4 – 1.8]	R	≤ 2	1.1 [0.4 – 1.7]
		●  MV1030	R	≤ 1	1.4 [1.0 – 2.0]	R	≤ 1	1.2 [0.4 – 1.8]	R	≤ 1	1.2 [0.4 – 1.7]
		●  MV1020	R	≤ 2	1.3 [1.0 – 2.0]	R	≤ 2	1.1 [0.4 – 1.8]	R	≤ 2	1.1 [0.4 – 1.7]
		●  MV1030	R	≤ 2	1.3 [1.0 – 2.0]	R	≤ 2	1.1 [0.4 – 1.8]	R	≤ 2	1.1 [0.4 – 1.7]

4/5


NEW**415SD – DEPTH OF CUT/FEED PER TOOTH**

Material	Properties	Cutting conditions	Grade	ae ≤ 0.5 DC		ae ≤ 0.75 DC		ae = DC	
					ap	fz		ap	fz
K	Ductile cast iron Tensile strength ≤ 800 MPa	●	MV1020	L	≤ 1	0.9 [0.4 – 1.2]	L	≤ 1	0.8 [0.4 – 1.1]
		●	MV1030	L	≤ 1	0.9 [0.4 – 1.2]	L	≤ 1	0.8 [0.4 – 1.1]
		●	MV1020	L	≤ 2	0.8 [0.4 – 1.2]	L	≤ 2	0.7 [0.4 – 1.1]
		●	MV1030	L	≤ 2	0.8 [0.4 – 1.2]	L	≤ 2	0.7 [0.4 – 1.1]
		●	MV1020	L	≤ 1	—	L	≤ 1	—
		●	MV1030	L	≤ 1	—	L	≤ 1	—
		●	MV1020	L	≤ 2	—	L	≤ 2	—
		●	MV1030	L	≤ 2	—	L	≤ 2	—
		●	MV1020	M	≤ 1	1.2 [0.4 – 1.8]	M	≤ 1	1.1 [0.4 – 1.6]
		●	MV1030	M	≤ 1	1.2 [0.4 – 1.8]	M	≤ 1	1.1 [0.4 – 1.6]
		●	MV1020	M	≤ 2	1.1 [0.4 – 1.8]	M	≤ 2	1.0 [0.4 – 1.6]
		●	MV1030	M	≤ 2	1.1 [0.4 – 1.8]	M	≤ 2	1.0 [0.4 – 1.6]
		●	MV1020	M	≤ 1	1.1 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]
		●	MV1030	M	≤ 1	1.1 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]
		●	MV1020	M	≤ 2	1.0 [0.4 – 1.7]	M	≤ 2	0.9 [0.4 – 1.5]
		●	MV1030	M	≤ 2	1.0 [0.4 – 1.7]	M	≤ 2	0.8 [0.4 – 1.5]
		●	MV1020	M	≤ 1	1.1 [0.4 – 1.7]	M	≤ 1	1.0 [0.4 – 1.5]
		●	MV1030	M	≤ 1	1.1 [0.4 – 1.7]	M	≤ 1	0.9 [0.4 – 1.5]
		●	MV1020	M	≤ 2	1.0 [0.4 – 1.7]	M	≤ 2	0.8 [0.4 – 1.5]
		●	MV1030	M	≤ 2	1.0 [0.4 – 1.7]	M	≤ 2	0.8 [0.4 – 1.5]
		●	MV1020	R	≤ 1	1.5 [0.4 – 2.1]	R	≤ 1	1.4 [0.4 – 1.9]
		●	MV1030	R	≤ 1	1.5 [0.4 – 2.1]	R	≤ 1	1.4 [0.4 – 1.9]
		●	MV1020	R	≤ 2	1.4 [0.4 – 2.1]	R	≤ 2	1.3 [0.4 – 1.9]
		●	MV1030	R	≤ 2	1.4 [0.4 – 2.1]	R	≤ 2	1.2 [0.4 – 1.9]
		●	MV1020	R	≤ 1	1.4 [1.0 – 2.0]	R	≤ 1	1.2 [0.4 – 1.8]
		●	MV1030	R	≤ 1	1.4 [1.0 – 2.0]	R	≤ 1	1.2 [0.4 – 1.7]
		●	MV1020	R	≤ 2	1.3 [1.0 – 2.0]	R	≤ 2	1.1 [0.4 – 1.8]
		●	MV1030	R	≤ 2	1.3 [1.0 – 2.0]	R	≤ 2	1.1 [0.4 – 1.7]
		●	MV1020	R	≤ 1	1.4 [1.0 – 2.0]	R	≤ 1	1.2 [0.4 – 1.7]
		●	MV1030	R	≤ 1	1.4 [1.0 – 2.0]	R	≤ 1	1.2 [0.4 – 1.7]
		●	MV1020	R	≤ 2	1.3 [1.0 – 2.0]	R	≤ 2	1.1 [0.4 – 1.7]
		●	MV1030	R	≤ 2	1.3 [1.0 – 2.0]	R	≤ 2	1.1 [0.4 – 1.7]
S	Titanium alloy	●	MP9130	L	≤ 1	0.7 [0.5 – 0.9]	L	≤ 1	0.6 [0.4 – 0.7]
		●	MP9130	L	≤ 2	0.6 [0.4 – 0.8]	L	≤ 2	0.5 [0.3 – 0.6]
		●	MP9130	M	≤ 1	0.7 [0.5 – 0.9]	M	≤ 1	0.6 [0.4 – 0.7]
		●	MP9130	M	≤ 2	0.6 [0.4 – 0.8]	M	≤ 2	0.5 [0.3 – 0.6]
		●	MP9130	R	≤ 1	0.8 [0.6 – 1.0]	R	≤ 1	0.7 [0.4 – 0.9]
		●	MP9130	R	≤ 2	0.7 [0.5 – 0.9]	R	≤ 2	0.6 [0.3 – 0.8]
		●	MP9130	R	≤ 1	0.7 [0.5 – 0.9]	R	≤ 1	0.6 [0.4 – 0.7]
		●	MP9130	R	≤ 2	0.6 [0.4 – 0.8]	R	≤ 2	0.5 [0.3 – 0.6]


415SD

MAXIMUM CAPACITIES BY MODE

RAMPING

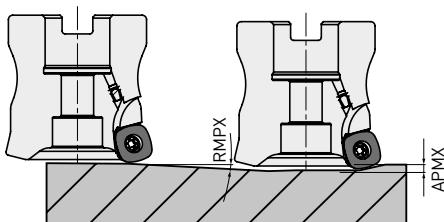

HELICAL DRILLING



- How to derive a locus of the centre of the tool.

$$\text{ØDC} = \text{ØDH} - \text{DCX}$$

Locus of the
centre of the tool Desired hole
diameter Cutting Diameter
Maximum


- For the depth of cut per pass, refer to the cutting conditions above for helical drilling.
- Set the machine spindle revolution so that the tool is rotating and cutting in a down cut direction.

- When ramping and helical cutting, please apply a lower feed (60 % of the calculated feed rate or less).
- The long chips generated can disperse, ensure that adequate safety precautions are taken.

Tool holder type	DCX	DC	APMX	Ramping		Helical drilling	
				RMPX	Min.	Max.	
ARBOR TYPE							
41SD-050A04AR-E	50	33.4	2	3	84	97	
41SD-050A05AR-E	50	33.4	2	3	84	97	
41SD-052A04AR-E	52	35.4	2	3	88	101	
41SD-052A06AR-E	52	35.4	2	3	88	101	
41SD-063A05AR-E	63	46.5	2	2	110	123	
41SD-063A07AR-E	63	46.5	2	2	110	123	
41SD-066A05AR-E	66	49.4	2	1.9	116	129	
41SD-066A07AR-E	66	49.4	2	1.9	116	129	

NOTE FOR PROGRAMMING

When using 415SD (Mplus), please programme as an RE = 4.3 radius cutter. The approximate uncut portions for the programme are as follows.

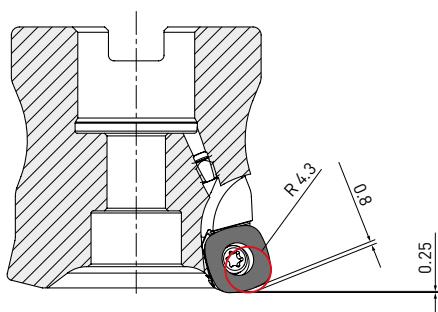

MEMO



GERMANY

MMC HARTMETALL GMBH
Comeniusstr. 2 . 40670 Meerbusch
Phone +49 2159 91890 . Fax +49 2159 918966
Email admin@mmchg.de

U.K. Office

MMC HARDMETAL U.K. LTD.
Part First Floor, 1 Centurion Court
Centurion Way, Tamworth, B77 5PN
Phone +44 1827 312312
Email sales@mitsubishicarbide.co.uk

U.K. Deliveries/Returns

Unit 4 B5K Business Park, Quartz Close
Tamworth, B77 4GR

SPAIN

MITSUBISHI MATERIALS ESPAÑA, S.A.
Calle Emperador 2 . 46136 Museros / Valencia
Phone +34 96 1441711
Email comercial@mmevalencia.es

FRANCE

MMC METAL FRANCE S.A.R.L.
6, Rue Jacques Monod . 91400 Orsay
Phone +33 1 69 35 53 53 . Fax +33 1 69 35 53 50
Email mmfsales@mmc-metal-france.fr

POLAND

MMC HARDMETAL POLAND SP. Z O.O.
Al. Armii Krajowej 61 . 50-541 Wroclaw
Phone +48 71335 1620 . Fax +48 71335 1621
Email sales@mitsubishicarbide.com.pl

ITALY

MMC ITALIA S.R.L.
Viale Certosa 144 . 20156 Milano
Phone +39 0293 77031 . Fax +39 0293 589093
Email info@mmc-italia.it

TURKEY

MMC HARTMETALL GMBH ALMANYA - İZMİR MERKEZ ŞUBESİ
Adalet Mahallesi Anadolu Caddesi No: 41-1 . 15001 35530 Bayraklı / İzmir
Phone +90 232 5015000 . Fax +90 232 5015007
Email info@mmchg.com.tr

europe.mmc-carbide.com

DISTRIBUTED BY:



MP111E

MMC Hartmetall GmbH – A Sales Company of MITSUBISHI MATERIALS | 2025.04