

ARM

MULTI-FUNCTIONAL HIGH FEED CUTTER
FOR MOULD & DIE MACHINING



Mplus...

ARM

MULTI-FUNCTIONAL HIGH FEED CUTTER FOR MOULD & DIE MACHINING

ARM is a multifunctional high-performance cutter that provides process stability even at high feed rates. Its individual design as well as the advanced technical features promise high material removal rates combined with effective chip control.



PRODUCT RANGE

ARM07:

- Arbor type: DC Ø 40 mm
- Shank type: DC Ø 16 – 32 mm
- Weldon type: DC Ø 16 – 32 mm
- Screw in type: DC Ø 16 – 42 mm

ARM09:

- Arbor type: DC Ø 40 – 66 mm
- Shank type: DC Ø 25 – 35 mm
- Weldon type: DC Ø 25 – 32 mm
- Screw in type: DC Ø 25 – 42 mm

ARM11:

- Arbor type: DC Ø 50 – 80 mm
- Shank type: DC Ø 32 mm
- Screw in type: DC Ø 32 – 35 mm

APPLICATION

- Mould & die machining
- Roughing
- High feed cutting
- Face milling
- Copying
- Helical milling
- Pocketing



ARM

MULTI-FUNCTIONAL HIGH FEED CUTTER FOR MOULD & DIE MACHINING

IDEAL FOR DEEP CAVITIES

- Internal coolant holes for air blow increases reliability due to effective chip disposal
- Ideal for high volume machining

HIGH PRODUCTIVITY FOR ROUGHING APPLICATIONS

- Time saving when machining high hardness plastic injection moulds and forging dies
- Ideal for high feed machining path strategies

COST EFFICIENT SOLUTION

- Economical 4 cutting edges
- Reinforced cutting edge geometry
- Versatile VP15TF grade for varied applications
- The micro-grain substrate and Miracle coating provide excellent welding resistance



BENEFITS

- High metal removal rates
- Near nett shape material remaining
- Process stability and security
- High rigidity for high feed rates
- Long tool life in both soft and hard materials
- Economic cost/performance ratio due to 4 cutting edges
- For high volume roughing
- Proven performance for machining of plastic injection moulds
- Versatile range of cutters available




ARM



HIGH FEED MILLING CUTTER FOR MOULD & DIE

P M K H

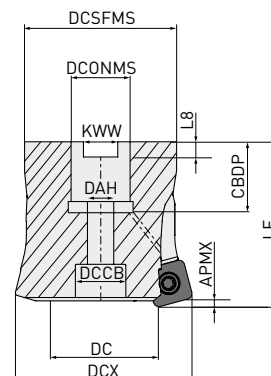

Right hand tool holder only.

ARBOR TYPE

Order number	Stock	CCT	DCX	DC	LF	DCONMS	CBDP	DAH	DCSFMS	KWW	L8	APMX	DCCB		Inserts
ARM09-040A05R	●	5	40	22.9	40	16	18	9	38.5	8.4	5.6	1.4	12	●	SPMX094506
ARM09-042A05R	●	5	42	24.9	40	16	18	9	38.5	8.4	5.6	1.4	12	●	
ARM09-050A06R	●	6	50	33	40	22	20	11	49	10.4	6.3	1.4	17	●	
ARM09-052A07R	●	7	52	35	40	22	20	11	49	10.4	6.3	1.4	17	●	
ARM09-066A08R	●	8	66	48.9	50	27	22	13	60	12.4	7	1.4	19	●	
ARM11-050A05R	●	5	50	29.4	40	22	20	11	49	10.4	6.3	1.8	17	●	SPMX115506
ARM11-052A05R	●	5	52	31.4	40	22	20	11	49	10.4	6.3	1.8	17	●	
ARM11-063A06R	●	6	63	42.4	50	27	22	13	60	12.4	7	1.8	19	●	
ARM11-066A07R	●	7	66	45.4	50	27	22	13	60	12.4	7	1.8	19	●	
ARM11-080A08R	●	8	80	59.3	50	27	22	13	64	12.4	7	1.8	19	●	

1/1



SET BOLT


DCX	Set bolt	Geometry
Ø 40-42	M8-C	
Ø 50-52	M10-C	
Ø 63-80	M12-C	

ARM



HIGH FEED MILLING CUTTER FOR MOULD & DIE

P M K H

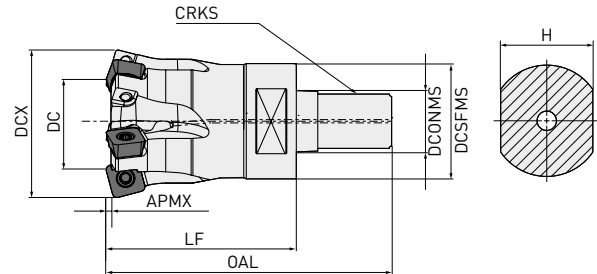

Right hand tool holder only.

SCREW-IN TYPE

Order number	Stock	CICT	DCX	DC	LF	DCONMS	DCSFMS	OAL	H	CRKS	APMX		Inserts
ARM07R162AM08	●	2	16	4	23	8.5	14	40	12	M8	0.6	●	SPMX073505
ARM07R203AM10	●	3	20	7.5	30	10.5	18	48	15	M10	1.2	●	
ARM07R254AM12	●	4	25	12.5	35	12.5	21	56	19	M12	1.2	●	
ARM07R325AM16	●	5	32	19.5	43	17	29	66	22	M16	1.2	●	
ARM09R252AM12	●	2	25	8	35	12.5	21	56	19	M12	1.4	●	SPMX094506
ARM09R324AM16	●	4	32	15	43	17	29	66	22	M16	1.4	●	
ARM09R354AM16	●	4	35	17.9	43	17	29	66	22	M16	1.4	●	
ARM09R425AM16	●	5	42	24.9	43	17	29	66	22	M16	1.4	●	
ARM11R323AM16	●	3	32	11.7	43	17	29	66	22	M16	1.8	●	SPMX115506
ARM11R353AM16	●	3	35	14.6	43	17	29	66	22	M16	1.8	●	

1/1




ARM



HIGH FEED MILLING CUTTER FOR MOULD & DIE

P M K H

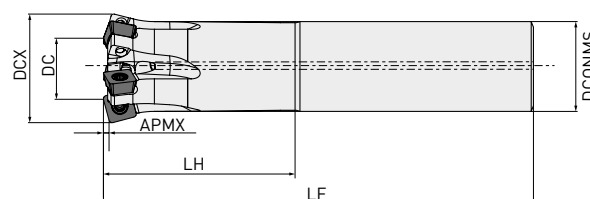


CYLINDRICAL SHANK

Order number	Stock	CICT	DCX	DCONMS	DC	LF	LH	APMX		Inserts
ARM07R162SA16S	●	2	16	16	4	85	25	0.6	●	SPMX073505
ARM07R203SA20S	●	3	20	20	7.5	130	30	1.2	●	
ARM07R254SA25S	●	4	25	25	12.5	140	40	1.2	●	
ARM07R325SA32S	●	5	32	32	19.5	150	50	1.2	●	
ARM09R252SA25S	●	2	25	25	8	140	40	1.4	●	SPMX094506
ARM09R324SA32S	●	4	32	32	15	150	50	1.4	●	
ARM09R354SA32S	●	4	35	32	17.9	150	50	1.4	●	
ARM11R323SA32S	●	3	32	32	11.7	150	50	1.8	●	SPMX115506

1/1



INSERTS

Order number	Class	Honing*	VP15TF	VP10H	IC	S	RE	Shape
SPMX073505ZNEN-FT	M	E	●	●	7.0	3.5	0.5	
SPMX073505ZNSN-FT	M	S	●	●	7.0	3.5	0.5	
SPMX094506ZNEN-FT	M	E	●	●	9.7	4.4	0.6	
SPMX094506ZNSN-FT	M	S	●	●	9.7	4.4	0.6	
SPMX115506ZNEN-FT	M	E	●	●	11.6	5.4	0.6	
SPMX115506ZNSN-FT	M	S	●	●	11.6	5.4	0.6	

1/1

* Honing:
E: Round,
S: Chamfer + Hone

SPARE PARTS

Insert type		
	Clamp screw	Wrench
SPMX073505	TPS3	TIP10W
SPMX094506	TPS4 - C	TIP15W - C
SPMX115506	TPS43 - C	TIP15W - C

ARM


RECOMMENDED CUTTING CONDITIONS

Material	Hardness	Insert	Grade	Standard milling				High feed milling			
				Vc	fz	ap	ae	Vc	fz	ap	ae
P	Mild steel	SPMX073505	VP15TF	170 (120 – 220)	1.0	0.3/0.8	100%/DC	200	1.0	0.4	100%/DC
		SPMX094506			1.2	0.5/1	100%/DC		1.4	0.5	100%/DC
		SPMX115506			1.5	0.8/1.5	100%/DC		1.4	0.8	100%/DC
	Carbon steel Alloy steel	SPMX073505	VP15TF	150 (100 – 200)	0.9	0.3/0.5	100%/DC	200			100%/DC
		SPMX094506			1	0.5/0.7	100%/DC		1.2	0.5	100%/DC
		SPMX115506			1.2	0.6/1.5	100%/DC		1.2	0.8	100%/DC
	280 – 350HB	SPMX073505	VP15TF	120 (80 – 150)	0.9	0.3/0.5	100%/DC	180	0.9	0.3	100%/DC
		SPMX094506			1	0.5/0.7	100%/DC		1.2	0.4	100%/DC
		SPMX115506			1.2	0.5/1	100%/DC		1.2	0.6	100%/DC
	<350HB	SPMX073505	VP15TF	120 (80 – 140)	0.75	0.3/0.5	100%/DC	180	0.75	0.3	100%/DC
		SPMX094506			1	0.5/0.7	100%/DC		0.8	0.4	100%/DC
		SPMX115506			1	0.5/1	100%/DC		0.8	0.6	100%/DC
	Pre-hardened steel	SPMX073505	VP15TF	100 (70 – 130)	0.75	0.25/0.4	100%/DC	150	0.75	0.3	100%/DC
		SPMX094506			0.8	0.4/0.6	100%/DC		0.8	0.4	100%/DC
		SPMX115506			0.8	0.4/0.8	100%/DC		0.8	0.5	100%/DC
		SPMX073505	VP10H	120 (90 – 150)	0.75	0.25/0.4	100%/DC	150	0.75	0.3	100%/DC
		SPMX094506			0.8	0.4/0.6	100%/DC		0.8	0.4	100%/DC
		SPMX115506			0.8	0.4/0.8	100%/DC		0.8	0.5	100%/DC
M	Stainless steel	SPMX073505	VP15TF	100 (60 – 120)	0.3	0.4/0.8	100%/DC	—	—	—	—
		SPMX094506			0.4	0.5/1	100%/DC		—	—	—
		SPMX115506			0.4	0.6/1.5	100%/DC		—	—	—
	PH, Duplex	SPMX073505	VP15TF	70 (50 – 90)	0.3	0.25/0.4	100%/DC	—	—	—	—
		SPMX094506			0.4	0.3/0.5	100%/DC		—	—	—
		SPMX115506			0.4	0.4/0.8	100%/DC		—	—	—
K	Gray cast iron	SPMX073505	VP15TF	150 (100 – 200)	1.0	0.3/0.6	100%/DC	—	—	—	—
		SPMX094506			1.2	0.5/0.8	100%/DC		—	—	—
		SPMX115506			1.2	0.6/1.5	100%/DC		—	—	—
	Ductile cast iron	SPMX073505	VP15TF	120 (80 – 160)	0.8	0.25/0.5	100%/DC	—	—	—	—
		SPMX094506			1	0.4/0.6	100%/DC		—	—	—
		SPMX115506			1	0.5/0.8	100%/DC		—	—	—
H	Hardened steel	SPMX073505	VP15TF	70 (50 – 90)	0.5	0.25/0.4	100%/DC	120	0.5	0.25	100%/DC
		SPMX094506			0.6	0.3/0.5	100%/DC		0.6	0.3	100%/DC
		SPMX115506			0.6	0.3/0.6	100%/DC		0.6	0.4	100%/DC
		SPMX073505	VP10H	90 (70 – 120)	0.5	0.25/0.4	100%/DC	120	0.5	0.25	100%/DC
		SPMX094506			0.6	0.3/0.5	100%/DC		0.6	0.3	100%/DC
		SPMX115506			0.6	0.3/0.6	100%/DC		0.6	0.4	100%/DC

1/1

NOTE FOR PROGRAMMING

When using ARM cutters, please program as an RE radius cutter.
The approximate uncut portions for the program are as follows:



Insert size	RE	K
07	1.7	0.82
09	2.3	1.6
11	2.695	2.1

MEMO



GERMANY

MMC HARTMETALL GMBH

Comeniusstr. 2 . 40670 Meerbusch

Phone +49 2159 91890 . Fax +49 2159 918966

Email admin@mmchg.de

U.K. Office

MMC HARDMETAL U.K. LTD.

Part First Floor, 1 Centurion Court

Centurion Way, Tamworth, B77 5PN

Phone +44 1827 312312

Email sales@mitsubishicarbide.co.uk

U.K. Deliveries/Returns

Unit 4 B5K Business Park, Quartz Close

Tamworth, B77 4GR

SPAIN

MITSUBISHI MATERIALS ESPAÑA, S.A.

Calle Emperador 2 . 46136 Museros/Valencia

Phone +34 96 1441711

Email comercial@mmevalencia.es

FRANCE

MMC METAL FRANCE S.A.R.L.

6, Rue Jacques Monod . 91400 Orsay

Phone +33 1 69 35 53 53 . Fax +33 1 69 35 53 50

Email mmfsales@mmc-metal-france.fr

POLAND

MMC HARDMETAL POLAND SP. Z O.O

Al. Armii Krajowej 61 . 50-541 Wrocław

Phone +48 71335 1620 . Fax +48 71335 1621

Email sales@mitsubishicarbide.com.pl

ITALY

MMC ITALIA S.R.L.

Viale Certosa 144 . 20156 Milano

Phone +39 0293 77031 . Fax +39 0293 589093

Email info@mmc-italia.it

TURKEY

MMC HARTMETALL GMBH ALMANYA - İZMİR MERKEZ ŞUBESİ

Adalet Mahallesi Anadolu Caddesi No: 41-1 . 15001 35530 Bayraklı / İzmir

Phone +90 232 5015000 . Fax +90 232 5015007

Email info@mmchg.com.tr

europe.mmc-carbide.com

DISTRIBUTED BY:

┌

┐

└

┘

MP200E 

MMC Hartmetall GmbH – A Sales Company of MITSUBISHI MATERIALS | 2024.01